

Electron avalanche in liquid xenon*

Stephen E. Derenzo, Terry S. Mast, and Haim Zaklad

Lawrence Berkeley Laboratory, University of California, Berkeley, California 94720

Richard A. Muller

Space Science Laboratory, University of California, Berkeley, California 94720

(Received 10 August 1973)

We present detailed measurements of the electron-avalanche process in liquid xenon. The measurements were made by using liquid-xenon-filled proportional chambers with anode diameters of 2.9, 3.5, and 5.0 μ to detect 279-keV γ rays and measure the photopeak pulse height as a function of applied voltage. The use of uniform pulses of electrons enabled us to discriminate against secondary Townsend processes. We present a table of the first Townsend coefficient α as a function of electric field E ; a typical value is $\alpha = (4.5 \pm 0.3) \times 10^4 \text{ cm}^{-1}$ at $E = 2 \times 10^6 \text{ V/cm}$. The electron avalanche occurs in liquid xenon at electric fields 27 ± 3 times smaller than would be predicted using measurements made in gaseous xenon and E/ρ density scaling.

I. INTRODUCTION

It has been known for over two decades that excess electrons (such as those freed by the passage of ionizing radiation) in very pure liquified Ar and Xe remain free and have high mobility in applied electric fields.¹⁻⁵ These mobility data have been successfully interpreted in terms of gas kinetic theory, implying that electrons move in these liquids as they would in compressed gases.^{6,7}

Alvarez suggested⁸ that the noble liquids might have important applications for high-energy nuclear-particle detection, particularly if the electronic signal could be increased by inducing an electron avalanche in the liquid (similar to that which occurs in gas-filled detectors). By using suitably high electric fields we were able to induce electron avalanche in both liquid Ar and liquid Xe.⁹⁻¹¹ Only in liquid Xe did we observe a "well-behaved" avalanche (i.e., one which had characteristics similar to those of a gaseous avalanche).¹² In this paper we report measurements in liquid Xe of the characteristic function that describes the avalanche, the first Townsend coefficient.

Electron avalanche occurs when the drifting electrons attain sufficient kinetic energy from the electric field to cause additional ionization. The first Townsend coefficient α is defined by the equation

$$dQ = \alpha Q dr, \quad (1.1)$$

where dQ is the charge of electrons (and Xe^+ ions) liberated in the avalanche when an electron charge Q drifts through a distance dr ; α can be a function of electric field, density, temperature, pressure, and the other parameters of the gas or liquid. In our experiments the only such parameter

that varied by a significant amount was the electric field E . We obtained data on the avalanche by studying the pulses in a liquid-filled proportional chamber as a function of applied voltage and anode diameter. Preliminary results were reported previously.¹⁰

II. DESCRIPTION OF EXPERIMENT

The experimental apparatus, a single-wire proportional chamber, is shown in Fig. 1. The chamber cathode was 8 mm in diameter and 30 mm long, formed by depositing a conductive coating of SnO on the cylindrical inside glass wall of the chamber. The anode was a fine tungsten wire, alternately 2.9, 3.5, or 5.0 μ in diameter.¹³ The wires were tensioned at 60% of their breaking load and soldered to feedthroughs at the top and bottom of the chamber. Several samples of each wire were photographed with a scanning electron microscope that was calibrated with a Buckbee-Mears screen¹⁴ having 2000 meshes per in. (see Fig. 2). Variations in wire diameter were typically $\pm 1.5\%$. To drive contaminants from the chamber walls, the chamber was kept at a temperature of 100 $^\circ\text{C}$ and an internal pressure below 10^{-6} Torr for a period of at least 15 h prior to filling. The chamber was filled with Xe gas from a specially designed noble-gas purifier¹⁵ and then cooled to -107°C (the boiling point of liquid Xe) by immersion in a thermostatically controlled bath of freon-11 (FCCl_3). Although our purifier reliably delivers Xe gas that contains < 50 ppb of O_2 and < 100 ppb of either N_2 , CO_2 , or CH_4 , the chamber fills with a liquid that often contains electronegative impurities (as yet unidentified) equivalent in electron-capture ability to several ppm O_2 . (See Ref.

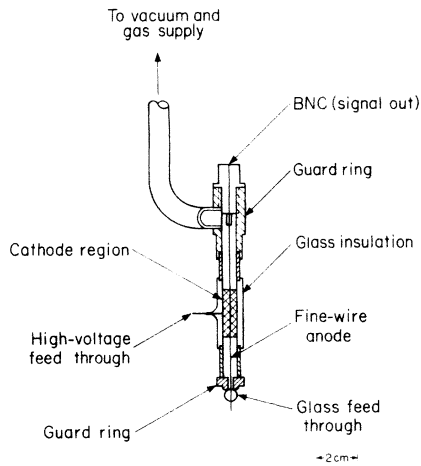


FIG. 1. Liquid-xenon single-wire proportional chamber. Cathode is 8-mm diam, formed by depositing a conductive coating of SnO onto the inside glass wall. Central anode wires of 2.9-, 3.5-, and 5.0- μ -diam tungsten were used. Chamber was connected directly to a charge amplifier.

15 for details.) Difficulty in removing electronegative impurities from liquid Xe has been mentioned by other workers.^{16,17} We are able to eliminate almost all of these electronegative impurities by using field emission electrons to sweep them to the outer electrode. A potential of approximately 5 kV is applied to the outer electrode, causing the fine central wire to emit (typically

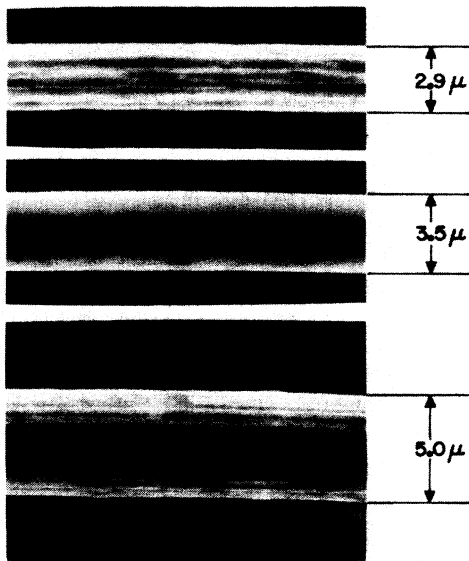


FIG. 2. Scanning electron micrographs of the tungsten anode wires used in this experiment. The 2000-mesh-per-in. Buckbee-Mears screen (used for calibration) may be seen beneath the 5- μ wire.

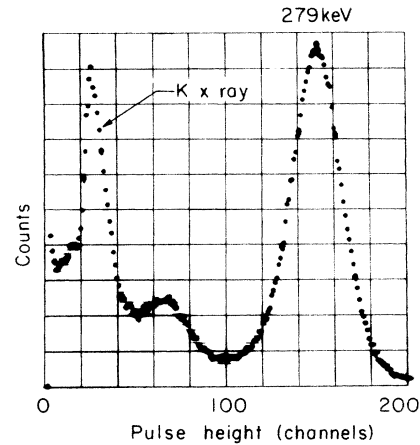


FIG. 3. Pulse-height spectrum from a collimated ^{203}Hg source in chamber of Fig. 1 filled with liquid xenon, using a 3.5- μ anode at 2400 V, showing 85-keV photopeak, 279-keV Compton edge, and 279-keV photopeak. Gain in the liquid was 10 and the field at the anode surface was 1.8×10^6 V/cm.

5–50 μA of current. After 10–60 min of this electronegative ion pumping the pulse height reaches a level that is not increased by further processing. (It may be readily calculated that < 6 ppb of impurities are removed per μA per min.) Reprocessing is required only after a period of several hours. These techniques are capable of reducing the impurity level to the point where electrons have a capture mean free path > 20 cm, as measured in a parallel-plate ionization chamber with a Frisch grid.

A collimated ^{203}Hg source was used to send a 1.2-mm-diam beam of 85-keV x rays and 279-keV γ rays into the 8-mm-diam cylindrical chamber.

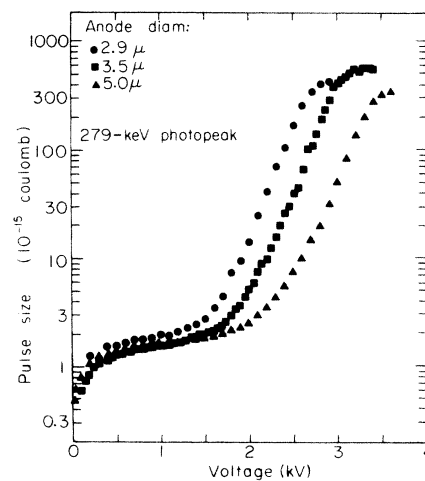


FIG. 4. Pulse height of 279-keV photopeak vs voltage for 2.9-, 3.5-, and 5.0- μ -diam anode wires.

The resulting recoil electron pulses were detected with a charge-sensitive amplifier of the type used for solid-state detectors. Electronic filtering consisting of 1- μ sec integration (rise time) and 5- μ sec differentiation (fall time) was chosen experimentally to maximize the signal-to-noise ratio. With this filtering, the noise was equivalent to 1.2×10^{-16} C FWHM (full width at half-maximum) at the input of the charge-sensitive amplifier. The chamber capacitance was 4.5 pF. A typical pulse-height distribution for the ^{203}Hg source (see Fig. 3) clearly shows the photopeak and Compton edge for the 279-keV γ ray and the photopeak for the 85-keV x ray. The pulse height of the 279-keV photopeak is shown in Fig. 4 as a function of applied voltage for 2.9-, 3.5-, and 5.0- μ -diam tungsten wires. The amplifiers and pulse-height analyzer were calibrated by injecting pulses of known voltage and ~ 200 -nsec rise time through a 10-pF capacitor directly into the charge-sensitive amplifier.

III. INITIAL ANALYSIS

The data in Fig. 4 have the following qualitative interpretation: At the lowest voltages an appreciable fraction of the electrons recombine with Xe^+ ions before the electrons can contribute to the pulse. As the voltage is increased nearly all the electrons escape recombination, and the pulse height reaches a plateau. The height of this plateau varies by about 10% from run to run due to variations in the level of electronegative impurities or possible calibration errors. At higher voltages, the electrons avalanche in the high electric field near the anode, resulting in a rapid increase of pulse height with voltage. At our highest voltages the space charge of the slow Xe^+ ions reduces the field near the wire, causing a saturation of pulse height and a broadening of the photopeak. We found that the saturation charge decreased by a factor of 3 when the counting rate was increased from 200 to 2000 sec^{-1} by tripling the diameter of the collimator hole. The data in Fig. 4 were taken with counting rates from 100 to 200 sec^{-1} and no significant change was observed in the data below 200×10^{-15} C when the intensity was further reduced.

At voltages slightly beyond those shown in Fig. 4, the photopeak is obscured by a large number of pulses (not related to the presence of the γ -ray source) of irregular shape and size. Investigation of higher voltages is prevented by the onset of sparking through the liquid at many places between the cathode and the anode wire. When the number of sparks exceeds $\sim 10^3$, the anode wire often

breaks.

One estimate of the first Townsend coefficient may be obtained by comparing the pulse heights of two chambers having different-size wires but the same electric field function $E(r)$ where r is the distance to the center of the wire. The ratio of these pulse heights will be the additional gain from the avalanche that occurs in the distance from the larger-wire radius to the smaller-wire radius.

For example, one obtains the same function $E(r)$ (in the region $r \geq 1.75 \mu$) for a 2.9- μ -diam wire at 1800 V as for a 3.5- μ -diam wire at 1765 V. From Fig. 4, we see that for the two wires at their respective voltages the pulse heights are 6.6 and 2.9×10^{-15} C. As we expect the avalanche to be identical in the regions where the fields are identical, we conclude that the additional gain of $6.6/2.9 = 2.3$ occurred during the last 0.3 μ of the avalanche, i.e., as the avalanche progressed from the virtual surface of the larger wire at $r = 1.75 \mu$ to the actual surface of the finer wire at $r = 1.45 \mu$. Assuming that the ratio of the gains is equal to the ratio of the size of the avalanches, this implies an average first Townsend coefficient of $\alpha = \ln(2.3)/0.3 \mu = 28\,000 \text{ cm}^{-1}$. The electric field in this region varied from 1.29×10^6 to 1.57×10^6 V/cm.

In order to remove the equal-ratio assumption and to study the behavior of the first Townsend coefficient in detail, we made a simultaneous fit to all the data of Fig. 4 below 200×10^{-15} C. In Sec. IV we consider the details of that fit. Most of the quantities used are defined in Table I.

IV. DETAILED ANALYSIS

When a 279-keV γ ray produces a photoelectron in liquid Xe, the photoelectron is severely multiple-Coulomb-scattered in the liquid. It produces approximately 12 500 ions pairs distributed about the γ -ray interaction point within a distance of 240 μ .¹⁸ We shall therefore consider each photoelectron to produce a pointlike packet of initial ionization at some distance r from the central axis of the chamber. Since the beam of 279-keV γ rays was much narrower than the chamber (1.2-mm diam versus 8-mm diam) and attenuation was small, the distribution of values of r is fairly uniform. Consequently, after evaluating the expression for the pulse height as a function of photoelectron position r , initial ionization Q_0 , recombination, electron attachment, and first Townsend coefficient we will average over all r .

The amount of electron charge $Q_1(r)$ that escapes recombination may be approximated by

TABLE I. Glossary.

Q_0	Initial ionization in liquid produced by a 279-keV photoelectron.
Q'_0	Initial ionization reduced by electron-capture processes that do not depend on the strength of the electric field.
$Q_1(r)$	Initial ionization escaping recombination.
$Q_2(r)$	Initial ionization escaping recombination and capture by impurities.
$Q_3(r, r')$	Amount of electron (and Xe^+ ion) charge produced in the avalanche as the electron charge $Q_2(r)$ drifts from r to r' .
Q_4	Charge induced at charge amplifier by motion of initial ionization electrons (averaged over all photoelectron positions r).
Q^-	Charge induced at charge amplifier by motion of avalanche electrons (averaged over all photoelectron positions).
$Q^+(T)$	Charge induced at charge amplifier by motion of avalanche Xe^+ ions during pulse-shaping time T (averaged over all photoelectron positions).
r_1	Radius of anode wire.
r_2	Radius of cathode (4 mm for this experiment).

$$Q_1(r) = \frac{Q_0}{1 + K/E(r)}, \quad (4.1)$$

where $E(r) = V/[r \ln(r_2/r_1)]$, $E(r)$ being the electric field at the position of the photoelectron, V the anode-cathode potential, r the radial coordinate of the photoelectron, Q_0 the initial ionization, and K the "recombination coefficient." This formula was used by Marshall⁴ and is based on the Jaffe theory.¹⁹

As the electron charge Q_1 drifts toward the center of the chamber, it is subject to capture by electronegative impurities. The amount of free electron charge Q_2 reaching the central region of the chamber is given by

$$Q_2(r) = Q_1(r) \exp \left[\int_{r_1}^r -\sigma(r) dr \right], \quad (4.2)$$

where r is the radial position of the photoelectron, r_1 is the anode radius, and σ is the probability of electron capture per cm of drift. The quantity $Q_2(r)$ is very insensitive to the cutoff r_1 .

Swan studied the dependence of σ on electric field (E) for small amounts of oxygen in liquid argon and found that $\sigma = (8 \times 10^9 \text{ V/cm}^2) F/E$, where F is the fraction of oxygen.⁷ Since we are dealing with unknown contaminants in liquid xenon (rather than oxygen in liquid argon) we choose to approximate $\sigma(r)$ by the more general formula

$$\sigma(r) = \sigma_0 + \lambda/E(r), \quad (4.3)$$

where σ_0 and λ are appropriate positive constants. We can find the integrated electron capture by using the r^{-1} dependence of the electric field:

$$\int_{r_1}^r -\sigma(r) dr = -r \left(\sigma_0 + \frac{\lambda}{2E(r)} \right), \quad (4.4)$$

where we have neglected terms of order r_1/r . Substituting the evaluated integral into Eq. (4.2), we find

$$\begin{aligned} Q_2(r) &= \frac{Q_0 \exp(-r\sigma_0) \exp[-r\lambda/2E(r)]}{[1 + K/E(r)]} \\ &= \frac{Q'_0 \exp[-r\lambda/2E(r)]}{[1 + K/E(r)]}, \end{aligned} \quad (4.5)$$

where we have absorbed into the coefficient Q'_0 those electron-attachment terms which do not depend on the electric field.

It can be seen in Fig. 4 that below the onset of avalanche (i.e., below 1200 V) the three experimental curves differ by multiplicative factors (between 0.9 and 1.1) and that these factors do not vary by any significant amount (<2%) from 100 to 1200 V. Consequently, Q'_0 was allowed to take different values for each of the 2.9-, 3.5-, and 5.0- μ runs, while K and λ , parameters that control voltage-dependent factors, were each required to take only a single value for all the data.

As the electron charge Q_2 approaches the fine central wire, it begins to avalanche. When the resulting electron swarm has reached a distance r' from the center of the wire, its size is given by integrating Eq. (1.1):

$$Q_3(r, r') = Q_2(r) \exp \left(\int_r^{r'} \alpha(r'') dr'' \right). \quad (4.6)$$

The remaining analysis consists of calculating the charge induced at the anode by the motion of

the ionization charge $Q_2(r)$ and the avalanche charge $Q_3(r, r')$.

In general, as a charge dq drops through a potential difference dV it induces a charge d^2Q on the anode given by²⁰

$$d^2Q = dq \frac{dV}{V}. \quad (4.7)$$

For a charge moving from r to r_f in a chamber of cylindrical geometry this becomes, after integration,

$$dQ = dq \frac{\ln(r/r_f)}{\ln(r_2/r_1)}, \quad (4.8)$$

where r_2 is the radius of the cathode (4 mm for this experiment).

For small electron capture, the charge induced at the anode by the motion of the *initial ionization electrons* (averaging over all photoelectron positions) may be closely approximated by

$$Q_4 = \int_{r_1}^{r_2} \frac{Q_2(r) \ln(r/r_1)}{r_2 \ln(r_2/r_1)} dr. \quad (4.9)$$

The avalanche produces a pulse at the charge-sensitive amplifier due to the drift of the *avalanche electrons* toward the wire and by the drift of the *avalanche Xe⁺ ions* away from the wire. The avalanche electrons drift at their saturated velocity¹⁶ of 3×10^5 cm/sec and reach the surface of the anode in a few nanoseconds. On the other hand, the avalanche Xe⁺ ions travel very slowly, requiring approximately 1 sec to drift from the anode to the cathode. Their mobility²¹ is 3×10^{-4} cm² V⁻¹ sec⁻¹. To have an acceptable signal-to-noise ratio, it is necessary to accept charge only during some small time interval T , i.e., to filter out the low-frequency noise components. Hence the height of the filtered pulse from the amplifier is determined by the drift of the e^- and Xe⁺ ions only during the time T . Our amplifier and filter (1- μ sec integration, 5- μ sec differentiation) responded to a charge impulse (of 10-nsec width) with an output pulse that peaked 1.8 μ sec after the initial rise. The electron avalanche pulses peaked in 2.0 μ sec and were thus in effect only slightly slower than instantaneous pulses.

For 10^{-7} sec $< T < 10^{-1}$ sec the filtered pulse contains all of the avalanche e^- contribution but only a fraction of the Xe⁺ contribution. It has been shown²² that during a time T in a chamber of cylindrical geometry the Xe⁺ ions produced in the avalanche will travel from r to r^+ , given by

$$r^+ = \left(r^2 + \frac{2\mu TV}{\ln(r_2/r_1)} \right)^{1/2}, \quad (4.10)$$

where μ is the mobility of the Xe⁺ ions, r_1 is the anode radius, and V is the potential on the cham-

ber.

From Eq. (1.1), the additional electron (and Xe⁺ ion) charge generated by the avalanche between r' and $r' - dr'$ is given by

$$dQ_3(r, r') = Q_3(r, r') \alpha(r') dr'. \quad (4.11)$$

To calculate the charge Q^- induced at the anode by all avalanche electrons we multiply Eq. (4.11) (the differential electron charge) by Eq. (4.8) (the charge fraction induced when electrons drift from r' to the anode at r_1), integrate over r' (to include the entire avalanche), and finally average over all photoelectron positions r :

$$Q^- = \int_{r_1}^{r_2} \int_{r_1}^{r_2} \frac{\ln(r'/r_1)}{r_2 \ln(r_2/r_1)} Q_3(r, r') \alpha(r') dr' dr. \quad (4.12)$$

To calculate the charge $Q^+(T)$ induced at the anode by all avalanche Xe⁺ ions, we multiply Eq. (4.11) (the differential Xe⁺ ion charge) by Eq. (4.8) (the charge fraction induced when Xe⁺ ions drift outward for time T), integrate over r' , and average over r :

$$Q^+(T) = \int_{r_1}^{r_2} \int_{r_1}^{r_2} \frac{\ln(r'/r^+)}{r_2 \ln(r_2/r_1)} Q_3(r, r') \alpha(r') dr' dr. \quad (4.13)$$

V. RESULTS IN LIQUID XENON

The sum of Eqs. (4.9), (4.12), and (4.13) was fitted to the data of Fig. 4 by adjusting the parameters Q'_0 , K , λ , and nine independent values of α for $E = 400$ – 2000 kV/cm in steps of 200 kV/cm. The integrals were computed numerically. The best-fit values are shown in Table II and the uncertainty assigned to each quantity takes under consideration the uncertainties in the other quantities. Although Q'_0 was allowed to take a different value for each of the 2.9-, 3.5-, and 5.0- μ runs to allow for differences in the level of electro-negative impurities and possible calibration errors, K , λ , and $\alpha(E)$ were required to fit the data for all three runs simultaneously. The fitting program used a linear interpolation on the table of $\log \alpha$ versus E to define the function $\alpha(E)$ in Eq. (4.6). We set $\alpha(E) = 0$ for $E < 400$ kV/cm. Since the pulses peaked 2 μ sec after their rise, we fixed T at 2 μ sec. When the fit was repeated assuming a value of 1.5 μ sec for T , the best-fit values of each parameter changed by less than 0.15 standard deviation. From measurements of the average ionization potential of gaseous Xe (21.9 eV/ion pair),²³ a 279-keV photoelectron should produce 2.04×10^{-15} C of initial ionization (Q_0). We see from Table II that the average of the fitted values of Q'_0 is only

TABLE II. Parameters resulting from the fit described in the text.

Quantity	Best-fit value
Q_0' (2.9- μ run)	$(2.22 \pm 0.14) \times 10^{-15}$ C
Q_0' (3.5- μ run)	$(1.86 \pm 0.10) \times 10^{-15}$ C
Q_0' (5.0- μ run)	$(1.96 \pm 0.14) \times 10^{-15}$ C
K	98_{-10}^{+12} V/cm
λ	0_{-0}^{+10} V/cm ²
α (400 kV/cm)	470_{-470}^{+600} cm ⁻¹
α (600 kV/cm)	8050 ± 3500 cm ⁻¹
α (800 kV/cm)	2550_{-2550}^{+7000} cm ⁻¹
α (1000 kV/cm)	8300_{-4700}^{+3400} cm ⁻¹
α (1200 kV/cm)	$15\,000 \pm 6000$ cm ⁻¹
α (1400 kV/cm)	$27\,500 \pm 6000$ cm ⁻¹
α (1600 kV/cm)	$33\,500 \pm 4500$ cm ⁻¹
α (1800 kV/cm)	$38\,400 \pm 4500$ cm ⁻¹
α (2000 kV/cm)	$44\,700 \pm 2600$ cm ⁻¹

3% smaller than the expected value of Q_0 , indicating that the loss of electrons to impurities was a minor effect. Moreover, the best-fit value for λ , the field-dependent attachment coefficient, was zero with a one-standard-deviation upper limit of 10 V/cm². Swan found⁷ that for 1 ppm O₂ in liquid argon, $\lambda = 8 \times 10^3$ V/cm².

We assigned a $\pm 10\%$ uncertainty to each experimental datum point and the χ^2 fit yielded the parameters shown in Table II. The data above 200

$\times 10^{-15}$ C were omitted from the fit in order to exclude space-charge effects.

The data for each run are plotted in Fig. 5 with the curves from the fit, and the agreement is very good. The best-fit χ^2 was 84.0 with 111 degrees of freedom, verifying the value of the uncertainty ($\pm 10\%$) assigned to the data.

In Fig. 6 we plot the pulse induced on the charge amplifier as a function of photoelectron position r for several voltages in the 2.9- μ run. These curves are the sum of the integrands in Eqs. (4.9), (4.12), and (4.13), before the averaging over r .

In Fig. 7 we plot the total charge G produced in the avalanche, the charge G^- induced by the motion of the avalanche e^- , and the charge G^+ induced by the motion of the avalanche Xe⁺ ions during the first 2 μ sec as a function of voltage for the 2.9- and 5.0- μ wires. These three curves are based on the parameters shown in Table II and normalized to one initial electron.

For this calculation, we define

$$G = \exp \left[\int_{r_1}^{r_2} \alpha(r'') dr'' \right], \quad (5.1)$$

$$G^- = \int_{r_1}^{r_2} \frac{\ln(r'/r_1)}{\ln(r_2/r_1)} \left[\exp \left(\int_{r'}^{r_2} \alpha(r'') dr'' \right) \right] \alpha(r') dr', \quad (5.2)$$

$$G^+ = \int_{r_1}^{r_2} \frac{\ln(r^+/r')}{\ln(r_2/r_1)} \left[\exp \left(\int_{r'}^{r_2} \alpha(r'') dr'' \right) \right] \alpha(r') dr'. \quad (5.3)$$

We see that of the charge produced in the avalanche (G) only a small fraction ($G^- + G^+$) is actually ob-

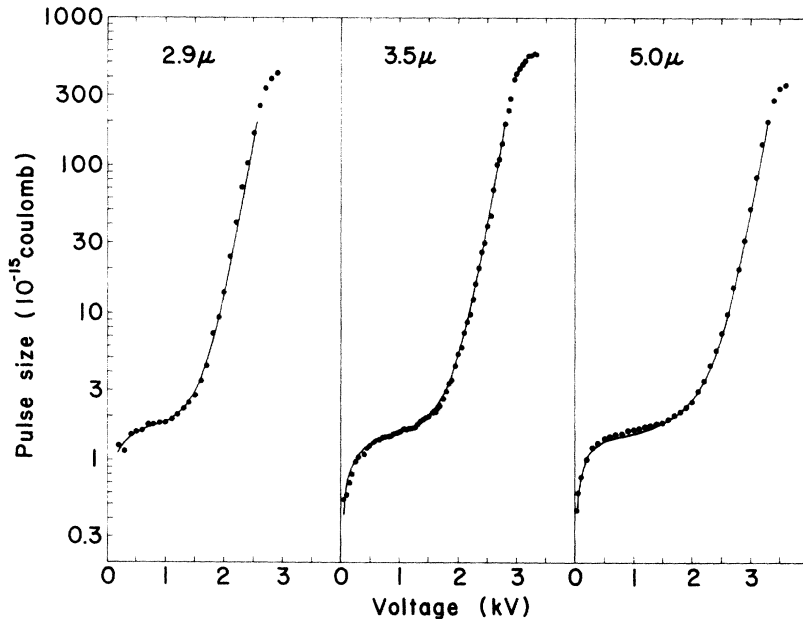


FIG. 5. Data of Fig. 4 shown with best-fit curves. See text for details.

served. This fraction varied from 0.10 to 0.19 during this experiment, increasing either with increasing voltage or with decreasing wire diameter. This behavior is reasonable, since an increase in the field at the anode causes the Xe^+ ions to travel a greater distance per μsec . Figure 7 also shows that the avalanche e^- contribute much less than the avalanche Xe^+ . As in gas-filled proportional chambers, this is due to the fact that the avalanche occurs close to the anode and the avalanche electrons fall through relatively few equipotentials before they reach the anode.

In Fig. 8 we plot the ionization coefficient $\eta = \alpha/E$ as a function of E/ρ for liquid and gaseous xenon (where ρ is the density in g/cm^3). The curve drawn through the liquid-data points is the gas-data curve displaced to the left by a factor $F=27$. By fitting the gas-data curve to the liquid-data points we find $F=27 \pm 3$ and that the fit has a 50% confidence level.

The only published measurement of $\alpha(E)$ in xenon gas was that of Kruithof.²⁴ His experiment consisted of measuring the average current in a parallel-plate chamber as a function of electric field. Kruithof's values of $\eta = \alpha/E$ (shown in Fig. 8) all lie on a very smooth curve, even though the data were taken at many different pressures, ranging from 0.28 to 165 Torr. We regard this as a very accurate demonstration of E/ρ scaling throughout the low-density region. We conclude that electrons in liquid xenon do not avalanche as though they were in a gas having the density of

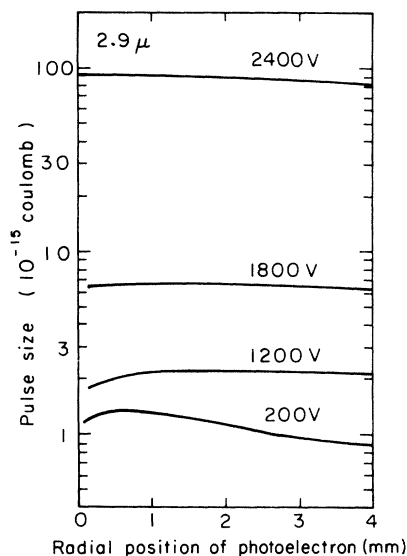


FIG. 6. Calculated pulse size for a 2.9- μ anode as a function of photoelectron position for a series of applied voltages. Calculation based on best-fit parameters shown in Table II.

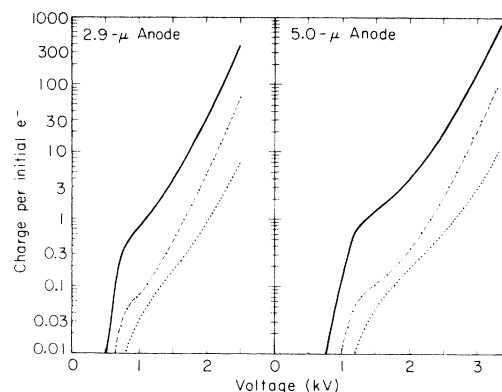


FIG. 7. Calculated curves comparing the size of the avalanche with the size of the e^- and Xe^+ ion contributions of the avalanche to the observed pulse. All curves are normalized to one initial e^- and based on the best-fit $\alpha(E)$ function shown in Table II. [See Eqs. (5.1)–(5.3) and associated text for further details.] Solid lines: charge of e^- (and Xe^+) produced in the avalanche. Dot-dashed lines: charge induced by the avalanche Xe^+ ions in the first 2 μsec . Dotted lines: charge induced by the avalanche electrons.

liquid xenon (3057 g/l), but rather an effective density approximately 27 times smaller, assuming that η is a function of E/ρ only.

One may speculate that the avalanche was occurring in some gas-liquid mixture near the surface of the wire, to account for the lack of density scaling. The existence of such a mixture might be suggested by the strong pressure dependence seen in the avalanche of ionization pulses in liquid argon.⁹ However, the pulse height in liquid xenon, unlike that in liquid argon, is insensitive to pressure changes from 1 to 4 atm. It is difficult to see

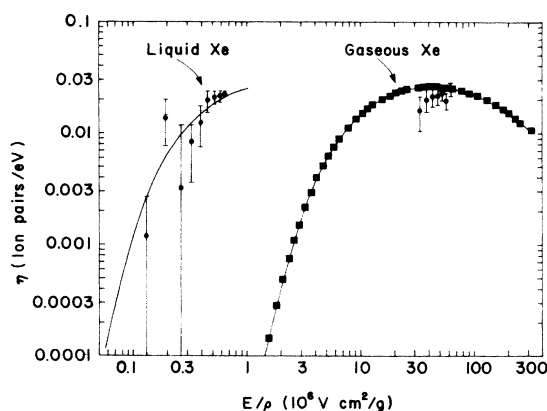


FIG. 8. Ionization coefficient vs the ratio of electric field to density for gaseous xenon (squares, Ref. 24; circles, this experiment) and for liquid xenon (circles, this experiment). The curve drawn through the liquid-data points is the gas data curve of Ref. 24 displaced to the left by a factor of 27.

how a gas-liquid mixture could exist at the wire even at 1-atm external pressure, since the presence of 10^6 V/cm at the surface of the wire, along with the high gradient of the field, causes an additional pressure of approximately 1 atm on the liquid in the vicinity of the wire.

We find no evidence in the photopeak pulses for a second Townsend process. Photoelectrons liberated at the cathode by the prompt uv emission from excited Xe atoms would produce a second pulse delayed by $1.5 \mu\text{sec}$, while electrons liberated at the cathode by the arrival of Xe^+ ions would produce a second pulse delayed by 1 sec. Such effects were not seen as multistep pulses or as a background on the pulse-height analyzer. To investigate quantitatively the effect of possible second Townsend processes, we refit the data, assuming that for each ion pair generated in the avalanche, 3×10^{-4} new electrons were promptly liberated in the chamber and that these electrons initiated a fresh avalanche. This number was chosen so that the largest pulse heights shown in Fig. 4 would have about a 30% contribution from the second Townsend processes. If the secondary electrons originate near the cathode, then this assumption is pessimistic, as the second and subsequent avalanches would be delayed, producing an easily detectable multistep pulse shape, in contradiction with our observations. After this fit, the only parameter that was changed from its value in Table II by more than 0.25 standard deviation was the first Townsend coefficient for 2×10^6 V/cm, and this was decreased by only 12% (1.8 standard deviation).

At voltages higher than those used in this experiment (above approximately 3500 V, depending on wire size), secondary processes dominate by producing spurious pulses of irregular shape and size (as described in Sec. III). Such pulses were not seen at the lower voltage settings used in the data-taking phase of the experiment. Even had they been present, they would not have shifted the photopeak, but would have added to the background on the pulse-height analyzer.

VI. RESULTS IN GASEOUS XENON

We have measured $\alpha(E)$ in pure gaseous xenon, using the 3.5- and 5.0- μ -diam anode wires to check whether our technique (which uses detector pulses in a nonuniform field) would yield the same values as those of Kruithof²⁴ (who used direct current and a uniform field). Our measurement was performed by using the 5.9-keV x rays from an ^{55}Fe source and at a Xe gas pressure of 2.2 atm.²⁵ The resulting values of η for gaseous Xe fall slightly below those of Kruithof (see Fig. 8).

VII. DISCUSSION

In both liquid and gaseous Xe, the ionization coefficient η rises rapidly as a function of E , then levels off. We may view η as a direct measure of the efficiency for converting electron kinetic energy into ion pairs. If all the kinetic energy were used to create pairs with maximum efficiency, then η would be 0.0824 ion pairs/eV, corresponding to the ionization potential of 12.13 eV.

When an energetic electron (such as a 279-keV photoelectron) passes through Xe it loses energy through mechanisms other than ionization. As a result, the average ionization potential is higher: 21.9 eV/ion pair, corresponding to an η of 0.0457. We see from Fig. 8 that electrons heated to ionizing energies by an electric field are almost as efficient in creating ion pairs as are energetic electrons.

At present there is no theory of electron avalanche in dielectric liquids with which we can compare our experimental results. A few qualitative arguments, however, may serve to explain why electrons avalanche in liquid Xe more readily than in any other liquid studied to date. At very low

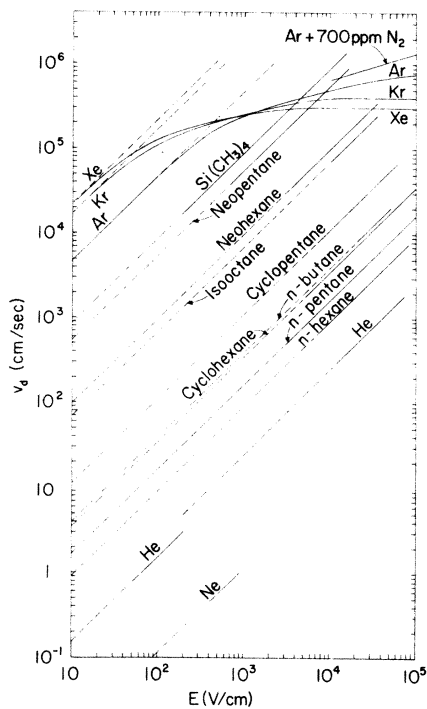


FIG. 9. Electron-drift velocities observed for various liquids as a function of electric field. Liquified noble gases at their normal boiling points (Refs. 5, 16, and 28). Liquid hydrocarbons at 23 °C (Ref. 29). Solid lines: observed data; dashed lines: linear extrapolations.

electric fields, free electrons are in thermal equilibrium with the liquid and their drift velocity v_d is proportional to the electric field E . According to the qualitative theory of Shockley²⁶ and Staub,²⁷ an increase in electron agitation energy (average instantaneous kinetic energy) is accompanied by a decrease in the electron mobility μ (defined as v_d/E). This behavior is seen in Fig. 9 for the liquified noble gases^{16,28} but not for the liquid hydrocarbons.²⁹ Electrons in polyatomic liquids suffer inelastic collisions as they excite vibrational and rotational states, and as evidenced by their high mobility are apparently prevented from acquiring any significant agitation energy, even at fields of 10^5 V/cm. Of all the liquids for which we have measurements, liquid Xe has the highest ratio between its low-field and high-field mobilities. This high ratio is perhaps related to the ease of producing avalanche in liquid Xe.

Recently, Pisarev *et al.* have reported on a cylindrical proportional chamber filled with crystalline Xe.³⁰ Their chamber had a cathode diameter of 6 mm, an anode diameter of 10 μ , and reached a gain of 150 at 5200 V. Using the values of $\alpha(E)$ measured in this experiment for liquid Xe and the positive ion (hole) mobility of $0.02 \text{ cm}^2 \text{ V}^{-1} \text{ sec}^{-1}$ measured for solid Xe,¹⁶ we would predict a gain of 150 at 4100 V, in good agreement with the measured voltage. We conclude that the avalanche in solid Xe is very similar to that in liquid Xe.

Pisarev *et al.* have also measured pulse height versus voltage in the same chamber filled with gaseous xenon at pressures ranging from 1 to 50 atm.³¹ Their solid-xenon data agree best with their gaseous-xenon data for 30 atm, showing that the required electric field for electron avalanche is similar in both gaseous xenon at a density of ~ 220 g/l and solid xenon at the much higher density of 3540 g/l.

VIII. CONCLUSIONS

We find that the avalanche of free electrons in purified liquid Xe is adequately described by the same formalism used for the avalanche of electrons in gases. Although the ionization coefficient $\eta(E/\rho)$ in liquid Xe has a shape similar to that measured in gaseous Xe, it is not the same function in the sense that strict "density scaling" does not apply. In gases η is a function of E/ρ over a large range of densities, but the function $\eta(E/\rho)$ measured in gaseous Xe is valid in liquid Xe only when the electric field is scaled by an "effective density" of 113 ± 11 g/l rather than the true density of 3057 g/l.

Note added in proof. Recently Prunier *et al.*³² adopted our techniques to observe proportional amplification in a liquid xenon-filled cylindrical chamber having a 7.5- μ -diam anode and a 10-mm-diam cathode. Although their data is in substantial agreement with ours, they underestimated the first Townsend coefficient by assuming that the observed charge was equal to the avalanche charge.³³

ACKNOWLEDGMENTS

We are indebted to Joe Savignano, Tony Vuletich, and Buck Buckingham for their skill and patience in building and maintaining our equipment. We are grateful to Robert Flagg, Steven Louie, and Robbie Smits for assistance in data taking and to Leo Falicov and Sherwood Parker for many helpful discussions. We thank Dane Anderberg for his excellent glass work and the Inorganic Materials Research Division of the Lawrence Berkeley Laboratory for the use of their scanning electron microscope.

*Work supported by the U. S. Atomic Energy Commission and the National Aeronautics and Space Administration.

¹N. Davidson and A. E. Larsh, Jr., Phys. Rev. **74**, 220 (1948); Phys. Rev. **77**, 706 (1950).

²G. W. Hutchinson, Nature **162**, 610 (1948).

³M. S. Malkin and H. L. Schultz, Phys. Rev. **83**, 1051 (1951).

⁴John Marshall, Rev. Sci. Instr. **25**, 232 (1954).

⁵Due to the formation of a "bubble" around the electron in liquid He [L. Meyer and F. Reif, Phys. Rev. **110**, 279 (1958); R. L. Williams, Can. J. Phys. **35**, 134 (1957)] and possibly in liquid Ne [L. Bruschi, G. Mazzi, and M. Santini, Phys. Rev. Lett. **28**, 1504 (1972)] the electron mobility in these liquids is considerably lower than in the liquids argon, krypton, and xenon.

⁶D. W. Swan, Proc. Phys. Soc. Lond. **76**, 36 (1960).

⁷D. W. Swan, Proc. Phys. Soc. Lond. **82**, 74 (1963).

⁸L. W. Alvarez, Lawrence Radiation Laboratory Group A Physics Note 672, November, 1968 (unpublished).

⁹S. E. Derenzo, D. B. Smith, R. G. Smits, H. Zaklad, L. W. Alvarez, and R. A. Muller, Lawrence Radiation Laboratory Report No. UCRL-20118, National Accelerator Laboratory Summer Study Report No. SS-181, July 1970, Batavia, Illinois (unpublished).

¹⁰R. A. Muller, S. E. Derenzo, G. Smadja, D. B. Smith, R. G. Smits, H. Zaklad, and L. W. Alvarez, Phys. Rev. Lett. **27**, 532 (1971).

¹¹S. E. Derenzo, R. Flagg, S. G. Louie, F. G. Mariam, T. S. Mast, R. A. Muller, A. J. Schwemin, R. G. Smits, H. Zaklad, and L. W. Alvarez, in *Proceedings of the Sixteenth International Conference on High Energy Physics, Chicago and Batavia, Illinois, September*

- 1972, edited by J. D. Jackson and A. Roberts (National Accelerator Laboratory, Batavia, Ill., 1972), Vol. 2, p. 388.
- ¹²In liquid argon, the electron avalanche can occur only at places scattered sparsely along the wire (see Ref. 9). One consequence is that only a small fraction of incident particles initiate an avalanche, an effect also observed by E. A. Kushnirenko and A. G. Chilingarov in *Proceedings of the International Conference on High Energy Physics Instrumentation, Dubna, U.S.S.R., September 1970*, edited by V. P. Dzhelepov (Joint Institute for Nuclear Research, Dubna, USSR, 1971), Vol. 1, p. 297. In liquid xenon the avalanche occurs with $\sim 100\%$ probability along the length of the wire.
- ¹³Our fine tungsten wire was purchased from the following suppliers: (a) 2.9 μ : Sigmund Cohn Corp., 121 South Columbus Avenue, Mount Vernon, N.Y. 10553; (b) 3.5 μ : Philips Elmet Corp., Lewiston, Me. 04240 (no longer can supply wire below 5- μ diam); (c) 5.0 μ : Sylvania Metals and Chemicals, Towanda, Pa. 18848.
- ¹⁴Supplied by Buckbee-Mears, 245 East 6th Street, St. Paul, Minn. 55101.
- ¹⁵H. Zaklad, Lawrence Radiation Laboratory Report No. UCRL-20690, April 1971 (unpublished).
- ¹⁶L. S. Miller, S. Howe, and W. E. Spear, *Phys. Rev.* **166**, 871 (1968).
- ¹⁷Yu. V. Kulikov, N. I. Molashkevich, and V. D. Ruabtsov, Dubna Report No. JINR P13-5403 (1970) (unpublished).
- ¹⁸The effective range of electrons in liquid xenon was assumed to be similar to that measured in aluminum by J. S. Marshall and A. G. Ward [*Can. J. Res. A* **15**, 39 (1937)].
- ¹⁹G. Jaffe, *Le Radium* **10**, 136 (1913). For a simpler discussion, see A. N. Gerritsen, *Physica* **14**, 381 (1948).
- ²⁰Hans H. Staub, in *Experimental Nuclear Physics*, Vol. I, edited by E. Segré (Wiley, New York, 1952), p. 16.
- ²¹H. Davis, S. Rice, and L. Meyer, *J. Chem. Phys.* **37**, 947 (1962).
- ²²H. H. Staub, p. 35 of Ref. 20.
- ²³J. Booz and H. G. Ebert, *Strahlentherapie* **120**, 7 (1963).
- ²⁴A. A. Kruithof, *Physica* **7**, 519 (1940).
- ²⁵S. G. S. Louie, Lawrence Berkeley Laboratory Group A Physics Note 765, 1972 (unpublished).
- ²⁶W. Shockley, *Bell Syst. Tech. J.* **30**, 990 (1951).
- ²⁷H. H. Staub, p. 6 of Ref. 20.
- ²⁸D. W. Swan, *Proc. Phys. Soc. Lond.* **83**, 659 (1964).
- ²⁹W. F. Schmidt and A. O. Allen, *J. Chem. Phys.* **52**, 4788 (1970).
- ³⁰A. F. Pisarev, V. F. Pisarev, and G. S. Revenko, Dubna Report No. JINR-P13-6449 {summarized in *Zh. Eksp. Teor. Fiz.* **63**, 1562 (1972) [*Sov. Phys.—JETP* **36**, 828 (1972)]}.
- ³¹A. F. Pisarev, V. F. Pisarev, and G. S. Revenko, Dubna Report No. JINR-P13-6450 {summarized in *Zh. Eksp. Teor. Fiz.* **63**, 1562 (1972) [*Sov. Phys.—JETP* **36**, 828 (1972)]}.
- ³²J. Prunier, R. Allemand, M. Laval, and G. Thomas, *Nucl. Instrum. Meth.* **109**, 257 (1973).
- ³³S. E. Derenzo, T. S. Mast, H. Zaklad, and R. A. Muller, *Nucl. Instrum. Meth.* (to be published).

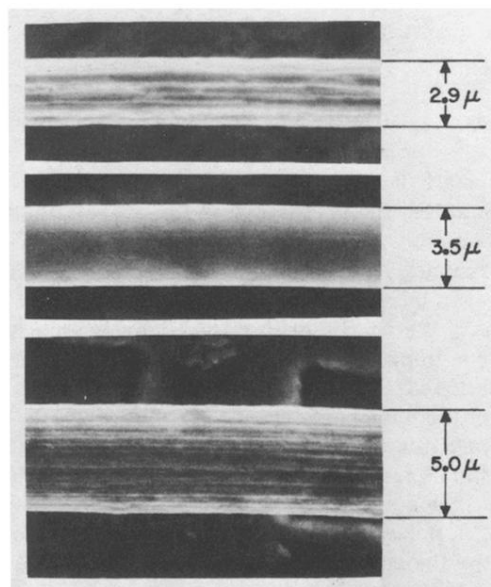


FIG. 2. Scanning electron micrographs of the tungsten anode wires used in this experiment. The 2000-mesh-per-in. Buckbee-Mears screen (used for calibration) may be seen beneath the $5\text{-}\mu$ wire.