## State tomography for magnetization dynamics

<sup>1</sup>Advanced Institute for Materials Research, Tohoku University, Sendai 980-8577, Japan

<sup>2</sup>Department of Applied Physics, The University of Tokyo, Tokyo 113-8656, Japan

<sup>3</sup>Institute for AI and Beyond, The University of Tokyo, Tokyo 113-8656, Japan

(Received 14 April 2021; revised 17 August 2021; accepted 14 September 2021; published 30 September 2021)

State tomography is an essential tool for analyzing physical states in quantum science. In magnets, elementary excitation called a magnon, or a spin wave, dominates magnetization dynamics and various magnetic properties. Here, we propose and demonstrate state tomography for magnetization dynamics, enabling us to obtain a density matrix and Wigner function of the magnetization dynamics. Using the technique, we found that parametrically excited magnons can form a mixed state composed of two coherent states. Magnetization state tomography will pave a way to explore a wide range of states of magnons, such as a squeezed state in condensed matter.

DOI: 10.1103/PhysRevB.104.L100419

In magnets, magnetization dynamical states can be described in terms of magnons. Magnons refer to the elementary excitation of magnetization precessional motion, one of the major spin-current carriers in solids [1-3]. Recently, some exotic states of magnons characterized by unconventional fluctuation have theoretically been predicted, such as magnon squeezed states, mixed states, and entanglement between magnons [4-10]. In general, a state of a dynamical system can be characterized by an average and fluctuation of its representative variables. To investigate the dynamical states of magnetization or magnons, the acquisition of a density matrix for magnetization dynamics is thus expected. The density matrix has often been interpreted by using a pseudoprobability distribution such as a Wigner function, which can visualize the quantum and classical nature of the dynamics [11]. State tomography has been used as a fundamental method in guantum optics and quantum computation science to analyze the state of a photon or a superconducting qubit [12–14]. The realization of magnetization state tomography will thus open a way to investigate various magnon states in a wide range of magnetic materials.

Here, we propose magnetization state tomography (MST), based on a magnetization-fluctuation measurement at a fixed frequency. We also experimentally demonstrate magnetization state tomography for a Pt/YIG ( $Y_3Fe_5O_{12}$ ) dot under parametric excitation, by showing the observation of a mixed state of magnons in the sample.

In the following, we formulate experimental observables for MST. To perform MST, it is necessary to measure the marginal probability distribution  $|\langle x_{\theta} | \psi_{f_0} \rangle|^2$  at a fixed frequency  $f_0$ , which conveys the mean and fluctuation of the magnon amplitude at  $f_0$ . Here,  $|\psi_{f_0}\rangle$  is a magnon state (either a mixed or pure state) at  $f_0$  obtained by using a phasesensitive measurement technique.  $x_{\theta} = x \cos \theta + p \sin \theta$  is the amplitude around the measurement axis  $\mathbf{x}_{\theta}$  in quadrature space defined by the quadrature operators  $\hat{x} = \frac{1}{\sqrt{2}}(\hat{a} + \hat{a}^{\dagger})$ ,  $\hat{p} = \frac{1}{\sqrt{2}i}(\hat{a} - \hat{a}^{\dagger})$ .  $\hat{a}$  and  $\hat{a}^{\dagger}$  are the annihilation and creation operators of a magnon. The marginal probability distribution corresponds to the projection of a Wigner function onto a line along  $\mathbf{x}_{\theta}$  in the quadrature space schematically shown in Fig. 1(a). For magnons, the quadrature amplitude corresponds to the x and y components of magnetization,  $\tilde{m}_x(\omega_0)$  and  $\tilde{m}_{\rm v}(\omega_0)$ , on a rotating frame of reference with the precession frequency [Fig. 1(b)]. The phase-sensitive measurement for magnons can be performed by several methods in principle, such as microwave spectroscopy, spin pumping [15–19], magnetoresistance (MR) [20-24], and magneto-optical measurements [25–27]. Spin pumping refers to the AC or DC spin-current generation at a normal-metal/ferromagnetic material interface as a result of magnetization precession. The generated spin current reflects the precession dynamics, realizing spin-pumping MST, while a magneto-optical measurement can detect the magnetization precession component through a magneto-optical effect, such as the Faraday and Cotton-Mouton effects, and Brillouin light scattering [28,29], realizing magneto-optical MST.

This Letter describes spin-pumping MST in detail. In the case of an AC spin-pumping measurement, the generated spin-current density can be written as follows [17],

$$\mathbf{J}_{\rm s} = \frac{\hbar}{4\pi} [\operatorname{Re} g_{\uparrow\downarrow}(\mathbf{m} \times \dot{\mathbf{m}}) + \operatorname{Im} g_{\uparrow\downarrow} \dot{\mathbf{m}}], \qquad (1)$$

where  $J_s$  is the generated spin-current density, **m** is the magnetic moment normalized by the saturation magnetization  $M_s$ ,  $\hbar$  is the Dirac constant, and Re  $g_{\uparrow\downarrow}$  (Im  $g_{\uparrow\downarrow}$ ) is the real (imaginary) part of the spin mixing conductance. In the sample configuration shown in Fig. 1(c), the *y* component of the generated spin-current density reads

$$J_{s}^{y} = \frac{\hbar}{4\pi S_{0}^{2}} [\operatorname{Re} g_{\uparrow\downarrow}(\hat{S}_{z}\dot{\hat{S}}_{x} - \hat{S}_{x}\dot{\hat{S}}_{z}) + \operatorname{Im} g_{\uparrow\downarrow}\dot{\hat{S}}_{y}S_{0}], \quad (2)$$

2469-9950/2021/104(10)/L100419(5)

Tomosato Hioki<sup>(1)</sup>,<sup>1,2,\*</sup> Hiroki Shimizu<sup>(1)</sup>,<sup>2</sup> Takahiko Makiuchi<sup>(1)</sup>,<sup>2</sup> and Eiji Saitoh<sup>1,2,3</sup>

<sup>\*</sup>tomosato.hioki.d7@tohoku.ac.jp

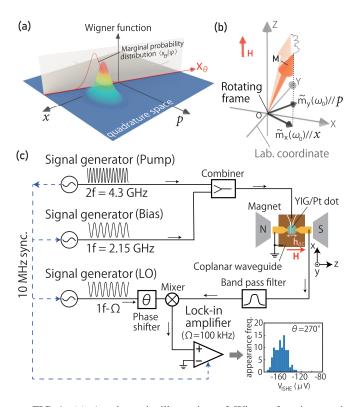


FIG. 1. (a) A schematic illustration of Wigner functions and marginal probability distribution in quadrature space. (b) Correspondence between quadrature amplitude and precession amplitude. (c) A schematic illustration of the measurement setup used in the present study.

where  $S_0$  is the total spin density, and  $\hat{S}_i$  is the *i* component of the spin operator. Here, we use the Holstein-Primakoff representation for a  $k \simeq 0$  magnon at the linear order,

$$\hat{S}_{+} = \hat{S}_{x} + i\hat{S}_{y} = \hbar \sqrt{\frac{2S_{0}}{V}}\hat{a},$$
 (3)

$$\hat{S}_{-} = \hat{S}_{x} - i\hat{S}_{y} = \hbar \sqrt{\frac{2S_{0}}{V}} \hat{a}^{\dagger},$$
 (4)

where V is the volume of the sample. By expanding the magnon operator to a Fourier series, the spin current  $J_s^y$  is written as follows,

$$J_{s}^{y}(t) = i\tilde{s}_{0} \int_{0}^{\infty} d\omega \omega [\hat{a}(\omega)e^{i(\omega t + \phi)} - \hat{a}^{\dagger}(\omega)e^{-i(\omega t + \phi)}], \quad (5)$$

where  $\tilde{s_0}$  is defined as  $\tilde{s_0} = \frac{\hbar}{4\pi\sqrt{2S_0V}}|g_{\uparrow\downarrow}|$ ,  $\phi$  is a materialdependent phase factor for mixing conductance defined as follows,  $g_{\uparrow\downarrow} = |g_{\uparrow\downarrow}|e^{i\phi}$ . The generated spin current is converted into an electric current via the inverse spin-Hall effect (ISHE) in a normal-metal layer attached to a ferromagnet [15,30–32]. The generated electric current via ISHE is written as follows,

$$J_{\rm c}^{\rm z}(t) = i\tilde{e} \int_0^\infty d\omega \omega [\hat{a}(\omega)e^{i(\omega t + \phi)} - \hat{a}^{\dagger}(\omega)e^{-i(\omega t + \phi)}].$$
 (6)

 $\tilde{e} = \frac{2e}{\hbar} \alpha_{N/F} A \tilde{s_0}$  is the reduced electric charge.  $\alpha_{N/F}$  is the spin-Hall angle, and A is a factor to reduce a spin current reflecting the backflow of the spin current  $A = \frac{\lambda_N}{d_N} \tanh(\frac{d_N}{2\lambda_N})$ , where  $\lambda_N$  and  $d_{\rm N}$  are the spin diffusion length and the thickness of the normal metal [18]. By analyzing the mean and fluctuation of  $J_c^z$ , we can estimate the magnon marginal probability distribution by using Eq. (6).

In the following, we demonstrate MST via the electric detection of magnetization dynamics based on the AC spin pumping and ISHE. We used a micrometer-scale dot-shaped Pt/YIG bilayer sample, where Pt is used for driving ISHE [33]. We employ a homodyne technique to read the quadrature amplitude. The frequency of the generated AC ISHE voltage in the Pt layer is down-converted by using a mixer circuit driven by a synchronized signal generator, named a local oscillator (LO). The frequency of the LO is set to  $f_0 - \Omega$  to realize the homodyne detection of the signal with a lock-in amplifier of which the reference frequency is  $\Omega$ . We use the operators  $\hat{x}$  and  $\hat{p}$  to map the magnon amplitude at a fixed frequency of  $f_0 = \omega_0/2\pi$  to the quadrature amplitude, which leads to the following formula of the output signal,

$$V_{\rm LI}^{\rm R} = \sqrt{2}\rho w \tilde{e} |G_{\rm p}| \omega_0 [\hat{p}\cos(\theta + \phi) - \hat{x}\sin(\theta + \phi)], \quad (7)$$

$$V_{\rm LI}^{\rm I} = \sqrt{2\rho w \tilde{e}} |G_{\rm p}| \omega_0 [\hat{x} \cos(\theta + \phi) + \hat{p} \sin(\theta + \phi)], \quad (8)$$

where  $\rho$  is the resistivity of the Pt, w is the distance between the voltage electrodes on the Pt,  $G_p$  is the gain of the mixer, and  $\theta$  is the relative phase between the output signal and the microwave from the LO. We measured the output signal with a lock-in amplifier with a finite lock-in frequency,  $\Omega =$ 100 kHz, to eliminate 1/f noise. By measuring the  $V_{\text{LI}}^{\text{R,I}}$  for statistical times, we obtain a appearance-frequency histogram as a function of the voltage value as shown in the inset of Fig. 1(c), which is regarded as the marginal probability distribution of magnons. The measurement axis is rotated in the quadrature space by changing the phase  $\theta$  to perform state tomography.

Theoretically, some unconventional magnon states have been predicted under parallel parametric excitation in a magnetic thin film [8]. The parallel parametric excitation is driven by a microwave with the doubled frequency of the ferromagnetic resonance (FMR) frequency whose magnetic field component is parallel to the external field [34]. Owing to the shape magnetic anisotropy, the parametrically excited magnons can occupy either a 0-phase state or  $\pi$ -phase state, which can be distinguished by a relative phase with respect to the pumping microwave as schematically shown in Figs. 2(a) and 2(b). Since the two states are energetically degenerated, either a 0- or  $\pi$ -phase state is probabilistically excited.

In the present study, we prepared the 130- $\mu$ m-diameter dot sample by a negative photolithography process from a Pt(10 nm)/YIG(370 nm) bilayer film. Both the Pt and YIG layers are prepared by sputtering in an ultrahigh vacuum [35]. The sample is mounted on coplanar waveguides to introduce a microwave and to detect the generated AC ISHE voltage [Fig. 2(c)]. The microwave magnetic field is parallel to the external magnetic field for the parametric excitation of magnons. The pumping microwave frequency is set to 2f = 4.30 GHz, and the microwave power is swept from 37.6 to 149.6 mW. Due to the parametric excitation, the precession oscillation frequency is half of the pumping microwave frequency. We measured the AC voltage generated in the Pt layer along the

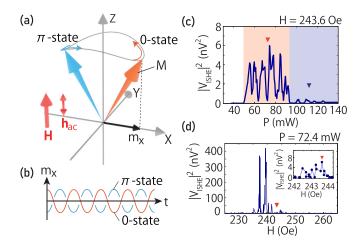


FIG. 2. (a) A schematic illustration of parametrically excited magnetization dynamics under parallel parametric pumping. Magnetic moment precesses with the angular frequency of  $\omega_0 = 2\pi f_0$  with the initial phase of 0 or  $\pi$  with respect to the pumping microwave. (b) A schematic illustration of the 0- and  $\pi$ -phase states plotted as a function of time *t*.  $m_x$  is the *x* component of magnetization. (c) Power dependence of the AC inverse spin-Hall voltage. (d) Magnetic field dependence of the AC inverse spin-Hall voltage. The inset shows the voltage near H = 243.6 Oe, where we perform the MST measurement.

external field (z axis) to detect the AC spin-pumping ISHE voltage. The voltage is measured 100 times per a single  $\theta$ , and the increment of  $\theta$  is 3°. All the measurements were performed at room temperature.

We employed a maximum-likelihood method [36] to obtain the density matrix from the experimental data. The Wigner function was reconstructed from the density matrix [12] (see Supplemental Material [37]). We renormalized the magnon number by a factor of  $10^{11}$ , as the typical magnon number under parametric excitation is as large as  $\sim 10^{10}$  [38,39]. We confirmed that the renormalization does not affect the obtained distribution of the number states.

We checked the condition of stable parametric excitation before the MST measurement. Figure 2(c) shows the power of the AC ISHE voltage as a function of the input 2*f* microwave (4.3 GHz) power, observed when the external magnetic field (243.6 Oe) almost satisfies the FMR condition for the frequency of 1*f* [Fig. 2(d)]. The ISHE voltage shows clear nonlinear behavior with a threshold power of 49.0 mW. Above a microwave power of 94.0 mW, the ISHE signal drops down due to the strong nonlinearity in the magnetization dynamics [40]. The observed fine peak structures as a function of *H* can be attributed to the excitation of spin standing wave modes in the Pt/YIG dot [41,42]. The peak magnetic field is 238.9 Oe, which coincides with the FMR field for 1f = 2.15 GHz according to Kittel's equation (see Supplemental Material [37]).

We performed the MST measurement at H = 243.6 Oe highlighted with an inverted triangle in Fig. 2(d), at which we found stable parametric oscillation. To excite either the 0- or  $\pi$ -phase state selectively, we controlled the phase of a weak bias microwave with a frequency of 1f = 2.15 GHz, which is applied when the 2f microwave is switched on. In

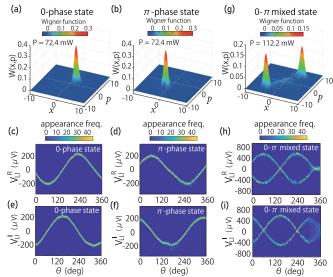


FIG. 3. (a) Reconstructed Wigner function for the experimentally obtained 0-phase state at an excitation power of 72.4 mW in the YIG/Pt dot. (b) Reconstructed Wiger function for the experimentally obtained  $\pi$ -phase state at 72.4 mW. (c)–(f) Contour plot of the appearance frequency distribution of the ISHE voltage. (c) and (d) show the distribution of the real part of the lock-in voltage ( $V_{L1}^R$ ) for the 0- and  $\pi$ -phase states obtained at 72.4 mW. (e) and (f) show the imaginary part of the lock-in voltage ( $V_{L1}^I$ ). (g) Reconstructed Wigner function for the experimentally obtained 0- $\pi$  mixed state at 112.2 mW. (h) Contour plot of the appearance frequency distribution obtained by measuring  $V_{L1}^R$  at 112.2 mW, (i) Contour plot of occurrence distribution obtained by measuring  $V_{L1}^I$  at 112.2 mW. The noisy behavior of the data in the region where  $\theta \ge 300^\circ$  is attributed to the temporary lack of magnetic field stability.

Fig. 3(a), we show the Wigner function reconstructed from the data obtained under a pumping microwave power of 72.4 mW. The result exhibits a single peak in the right-top (first) quadrant, signaling a 0-phase state. On the other hand, the Wigner function reconstructed from another data exhibits a peak in the left-bottom (third) quadrant as shown in Fig. 3(b), signaling a  $\pi$ -phase state. The relative phase difference between the two states is  $\pi$ , consistent with the property of parametrically excited magnons.

Figure 3(c) shows the frequency distribution of  $V_{LI}^R$  as a function of  $\theta$  under the excitation of the 0 phase. The peak of the frequency distribution follows sinusoidal dependence, consistent with Eq. (7). Under the excitation of a  $\pi$  phase, on the other hand, the distribution of  $V_{LI}^R$  follows sinusoidal dependence with the opposite sign with respect to that of the 0-phase excitation [Fig. 3(d)]. Figures 3(e) and 3(f) show the frequency distributions of  $V_{LI}^I$  under the excitation of 0- and  $\pi$ -phase states, respectively. The  $V_{LI}^I$  follows a cosinelike  $\theta$  dependence, consistent with Eq. (8).

We estimated the magnon number from the voltage amplitude [43]. The ISHE parameters and  $g_{\uparrow\downarrow} = 1.94 \times 10^{18} \text{ m}^{-2}$ are estimated from DC spin-Hall measurement for the same sample (see Supplemental Material [37]). The voltage peak for the 0-phase state is 210  $\mu$ V, signaling a magnon number of 4.2 × 10<sup>11</sup>, which reasonably matches with previous

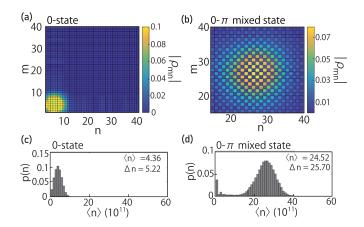


FIG. 4. (a) The absolute value of the density matrix for the experimentally obtained 0 state at 72.4 mW. (b) The absolute value of the density matrix for the experimentally obtained  $0-\pi$  mixed state at 112.2 mW, which exhibits a characteristic chessboard pattern. (c) The number distribution for the 0 state. (d) The number distribution for the  $0-\pi$  mixed state.

theoretical research [44,45]. The number corresponds to the precession angle of  $\sim 9.3^{\circ}$ .

Figure 3(g) shows the experimentally obtained Wigner function for magnons parametrically excited by a 112.2-mW microwave without bias microwaves. In the condition, due to the strong nonlinearity, the steady 0- or  $\pi$ -phase signals disappear and the ISHE voltage fluctuates. We found that the obtained Wiger function for the 112.2-mW excitation shows two peaks with similar amplitude, a characteristic feature for a mixed state. The relative phase between the two peaks is  $\pi$ , which demonstrates the formation of a mixed state made up of 0- and  $\pi$ -phase states under such strong parametric excitation. Figures 3(h) and 3(i) show the obtained appearance frequency distribution under the condition, which can be interpreted as a sum of two frequency distributions of 0- and  $\pi$ -phase states.

Figure 4(a) shows the experimentally obtained density matrix for the 0-phase state. The density matrix for the 0-phase state shows a Gaussian distribution [Fig. 4(c)] on the number basis, experimentally demonstrating the formation of a single coherent state as a result of parametric excitation. On the other hand, as shown in Fig. 4(b), the experimentally obtained density matrix for the  $0-\pi$  mixed state at 112.2 mW was found to exhibit a characteristic chessboard pattern on the number basis. Theoretically, a density matrix element for a  $0-\pi$  mixed state is given by

$$\rho_{mn} = e^{-|\alpha|^2} \frac{\alpha^n \alpha^{*m}}{\sqrt{n!}\sqrt{m!}} [1 + (-1)^{m+n}], \qquad (9)$$

where *m* and *n* are the magnon number indices, and  $\alpha$  is the complex amplitude of a magnon coherent state [46]. When m + n is an odd (even) number,  $\rho_{mn} = 0$  ( $\rho_{mn} \neq 0$ ). Equation (9) well reproduces the experimentally obtained chessboard pattern shown in Fig. 4(b). The result provides evidence that our state tomography properly measures the density matrices for the magnetization dynamics. Note that the peak at  $\langle n \rangle = 0$  of the number distribution in Fig. 4(d) is an experimental artifact due to the unstable voltage seen in the region  $300^{\circ} < \theta < 360^{\circ}$  in Figs. 3(h) and 3(i), which we attribute to a temporary lack of magnetic field stability.

In summary, we proposed and experimentally demonstrated magnetization state tomography by measuring the AC voltage generated by parametrically excited magnons via AC spin pumping and the inverse spin-Hall effect. The obtained Wigner functions and density matrices on the number basis demonstrate that the parametric excitation of magnon can lead to the formation of a mixed state made up of two coherent states with opposite phases. Magnetization state tomography gives access to the density matrices of various magnon states in a wide range of magnetic materials.

We thank N. Yokoi, B. Hillebrands, and V. I. Vasyuchka for fruitful discussions. This work was financially supported by JST ERATO Grant No. JPMJER1402, Japan, and JSPS KAK-ENHI (Grants No. JP19H05600 and No. JP20K15160), Japan, and JST CREST (No. JPMJCR20C1 and No. JPMJCR20T2), Japan.

- Y. Kajiwara, K. Harii, S. Takahashi, J. Ohe, K. Uchida, M. Mizuguchi, H. Umezawa, H. Kawai, K. Ando, K. Takanashi, S. Maekawa, and E. Saitoh, Nature (London) 464, 262 (2010).
- [2] G. E. W. Bauer, E. Saitoh, and B. J. van Wees, Nat. Mater. 11, 391 (2012).
- [3] A. V. Chumak, V. I. Vasyuchka, A. A. Serga, and B. Hillebrands, Nat. Phys. 11, 453 (2015).
- [4] M. Elyasi, Y. M. Blanter, and G. E. W. Bauer, Phys. Rev. B 101, 054402 (2020).
- [5] J. Zou, S. K. Kim, and Y. Tserkovnyak, Phys. Rev. B 101, 014416 (2020).
- [6] J. Li, S. Y. Zhu, and G. S. Agarwal, Phys. Rev. A 99, 021801(R) (2019).
- [7] M. Kostylev, A. B. Ustinov, A. V. Drozdovskii, B. A. Kalinikos, and E. Ivanov, Phys. Rev. B 100, 020401(R) (2019).

- [8] Z. Haghshenasfard and M. G. Cottam, J. Phys.: Condens. Matter 29, 045803 (2016).
- [9] Z. Zhang, M. O. Scully, and G. S. Agarwal, Phys. Rev. Research 1, 023021 (2019).
- [10] A. Kamra, E. Thingstad, G. Rastelli, R. A. Duine, A. Brataas, W. Belzig, and A. Sudbø, Phys. Rev. B 100, 174407 (2019).
- [11] M. Hillery, R. F. O'Connell, M. O. Scully, and E. P. Wigner, Phys. Rep. 106, 122 (1984).
- [12] U. Leonhardt, *Measuring the Quantum State of Light* (Cambridge University Press, Cambridge, U.K., 1997).
- [13] G. M. D'Ariano, C. Macchiavello, and M. G. A. Paris, Phys. Rev. A 50, 4298 (1994).
- [14] K. Vogel and H. Risken, Phys. Rev. A 40, 2847 (1989).
- [15] E. Saitoh, M. Ueda, and H. Miyajima, Appl. Phys. Lett. 88, 182509 (2006).

- [16] D. Wei, M. Obstbaum, M. Ribow, C. H. Back, and G. Woltersdorf, Nat. Commun. 5, 3768 (2014).
- [17] H. J. Jiao and G. E. W. Bauer, Phys. Rev. Lett. 110, 217602 (2013).
- [18] K. Ando, S. Takahashi, J. Ieda, Y. Kajiwara, H. Naklayama, T. Yoshino, K. Harii, Y. Fujikawa, M. Matsuo, S. Maekawa, and E. Saitoh, J. Appl. Phys. **109**, 103913 (2011).
- [19] H. Nakayama, K. Ando, K. Harii, T. Yoshino, R. Takahashi, Y. Kajiwara, K. Uchida, and Y. Fujikawa, and E. Saitoh, Phys. Rev. B 85, 144408 (2012).
- [20] E. H. Hall, Philos. Mag. 10, 301 (1880).
- [21] N. Nagaosa, J. Sinova, S. Onoda, A. H. MacDonald, and N. P. Ong, Rev. Mod. Phys. 82, 1539 (2010).
- [22] H. J. Juretschke, J. Appl. Phys. 31, 1401 (1960).
- [23] G. Binasch, P. Grünberg, F. Saurenbach, and W. Zinn, Phys. Rev. B 39, 4828 (1989).
- [24] M. N. Baibich, J. M. Broto, A. Fert, F. Nguyen Van Dau, F. Petroff, P. Etienne, G. Creuzet, A. Friederich, and J. Chazelas, Phys. Rev. Lett. **61**, 2472 (1988).
- [25] Y. Hashimoto, S. Daimon, R. Iguchi, Y. Oikawa, K. Shen, K. Sato, D. Bossini, Y. Tabuchi, T. Satoh, B. Hillebrands, G. E. W. Bauer, T. H. Johansen, A. Kirilyuk, T. Rasing, and E. Saitoh, Nat. Commun. 8, 15859 (2017).
- [26] T. Satoh, Y. Terui, R. Moriya, B. A. Ivanov, K. Ando, E. Saitoh, T. Shimura, and K. Kuroda, Nat. Photonics 6, 662 (2012).
- [27] T. Hioki, Y. Hashimoto, and E. Saitoh, Commun. Phys. 3, 188 (2020).
- [28] O. Büttner, M. Bauer, S. O. Demokritov, B. Hillebrands, Y. S. Kivshar, V. Grimalsky, Y. Rapoport, and A. N. Slavin, Phys. Rev. B 61, 11576 (2000).
- [29] F. Fohr, A. A. Serga, T. Schneider, J. Hamrle, and B. Hillebrands, Rev. Sci. Instrum. 80, 043903 (2009).
- [30] M. V. Costache, M. Sladkov, S. M. Watts, C. H. van der Wal, and B. J. van Wees, Phys. Rev. Lett. 97, 216603 (2006).

- [31] S. O. Valenzuela and M. Tinkham, Nature (London) 442, 176 (2006).
- [32] T. Kimura, Y. Otani, T. Sato, S. Takahashi, and S. Maekawa, Phys. Rev. Lett. 98, 156601 (2007).
- [33] S. Takahashi, E. Saitoh, and S. Maekawa, J. Phys.: Conf. Ser. 200, 062030 (2010).
- [34] T. Brächer, P. Pirro, and B. Hillebrands, Phys. Rep. 699, 1 (2017).
- [35] T. Nozue, T. Kikkawa, T. Watamura, T. Niizeki, R. Ramos, E. Saitoh, and H. Murakami, Appl. Phys. Lett. 113, 262402 (2018).
- [36] A. I. Lvovsky, J. Opt. B: Quantum Semiclass. Opt. 6, S556 (2004).
- [37] See Supplemental Material at http://link.aps.org/supplemental/ 10.1103/PhysRevB.104.L100419 for details of the estimation of spin mixing conductance, voltage-precession angle correspondence, and the method for reconstructing the Wigner function from a density matrix.
- [38] H. G. Bauer, P. Majchrak, T. Kachel, C. H. Back, and G. Woltersdorf, Nat. Commun. 6, 8274 (2015).
- [39] B. A. Auld, J. Appl. Phys. 36, 689 (1965).
- [40] S. M. Rezende and F. M. de Aguiar, Proc. IEEE 78, 893 (1990).
- [41] T. Makiuchi, T. Hioki, Y. Shimazu, Y. Oikawa, N. Yokoi, S. Daimon, and E. Saitoh, Appl. Phys. Lett. 118, 022402 (2021).
- [42] F. Guo, L. M. Belova, and R. D. McMichael, Phys. Rev. B 89, 104422 (2014).
- [43] Z. Qiu, K. Ando, K. Uchida, Y. Kajiwara, R. Takahashi, H. Nakayama, T. An, Y. Fujikawa, and E. Saitoh, Appl. Phys. Lett. 103, 092404 (2013).
- [44] C. B. de Araujo, Phys. Rev. B 10, 3961 (1974).
- [45] S. M. Rezende, Fundamentals of Magnonics (Springer Nature, Cham, 2020).
- [46] S. M. Rezende and N. Zagury, Phys. Lett. A 29, 47 (1969).