

## Social force model for pedestrian dynamics

Dirk Helbing and Péter Molnár

*II. Institute of Theoretical Physics, University of Stuttgart, 70550 Stuttgart, Germany*

(Received 14 April 1994; revised manuscript received 5 January 1995)

It is suggested that the motion of pedestrians can be described as if they would be subject to “social forces.” These “forces” are not directly exerted by the pedestrians’ personal environment, but they are a measure for the internal motivations of the individuals to perform certain actions (movements). The corresponding force concept is discussed in more detail and can also be applied to the description of other behaviors. In the presented model of pedestrian behavior several force terms are essential: first, a term describing the acceleration towards the desired velocity of motion; second, terms reflecting that a pedestrian keeps a certain distance from other pedestrians and borders; and third, a term modeling attractive effects. The resulting equations of motion are nonlinearly coupled Langevin equations. Computer simulations of crowds of interacting pedestrians show that the social force model is capable of describing the self-organization of several observed collective effects of pedestrian behavior very realistically.

PACS number(s): 05.40.+j, 46.10.+z, 34.10.+x, 89.50.+r

### I. INTRODUCTION

During the past two decades models of pedestrian behavior have found notable interest for several reasons. First, there are some striking analogies with gases [1–3] and fluids [1,2,4,5]. Second, all model quantities such as places  $\vec{r}_\alpha$  and velocities  $\vec{v}_\alpha$  of pedestrians  $\alpha$  are measurable and therefore comparable with empirical data. Third, there already exists a considerable amount of data material such as flow measurements or (video) films [6–8]. Fourth, pedestrian models can provide valuable tools for designing and planning pedestrian areas, subway, or railroad stations, big buildings, shopping malls, etc. [9–11].

In the 1970s Henderson [4,5] had compared measurements of pedestrian flows with Navier-Stokes equations with considerable success. His phenomenological fluid-dynamics approach had been improved and mathematically founded by Helbing in the 1990s on the basis of a pedestrian specific gas-kinetic (Boltzmann-like) model [1,2]. This model is closely related to some gas-kinetic [12,13] and fluid-dynamic [14–16] *traffic* models. Recently, much attention has been attracted by “*microscopic*” approaches for vehicular traffic [17–20]. In the following, we will introduce a *social force model* for pedestrian motion. First ideas of this microscopic modeling concept were formulated in [2,21]. A short overview of “microscopic,” “mesoscopic,” and “macroscopic” descriptions of pedestrian behavior and their interrelations is given in Ref. [22].

### II. THE SOCIAL FORCE CONCEPT

Many people have the feeling that human behavior is “chaotic” or at least very irregular and not predictable. This is probably true for behaviors that are found in complex situations. However, at least for relatively simple situations *stochastic* behavioral models may be developed

if one restricts oneself to the description of behavioral *probabilities* that can be found in a huge population (or group) of individuals (see [3,23,24]). This idea has been followed by the *gas-kinetic* pedestrian model [1–3].

Another approach for modeling behavioral changes has been suggested by Lewin [25]. According to his idea behavioral changes are guided by so-called *social fields* or *social forces*. In the following we will examine whether this idea could be applied to the description of pedestrian behavior.

Figure 1 illustrates a scheme of the processes that lead to behavioral changes. According to this, a sensory *stimulus* causes a behavioral *reaction* that depends on the

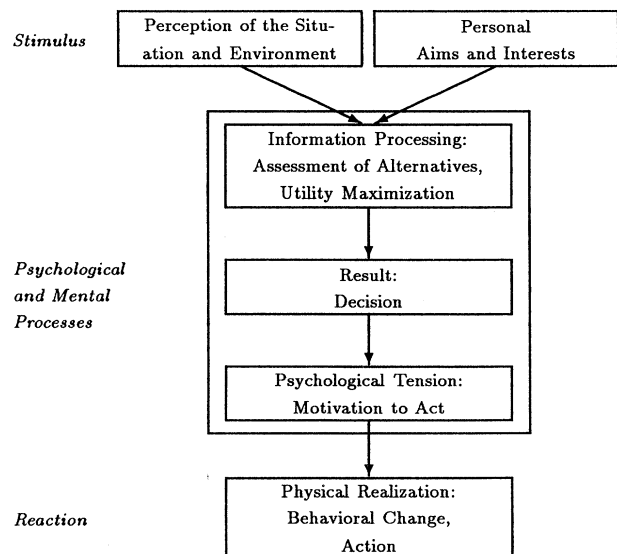


FIG. 1. Schematic representation of processes leading to behavioral changes.

TABLE I. Classification of behaviors according to their complexity.

Stimulus	simple or standard situations	complex or new situations
Reaction	automatic reaction, reflex	result of evaluation, decision process
Characterization	well predictable	probabilistic
Modeling concept	social force model, etc.	decision theoretical model, etc.
Example	pedestrian motion	destination choice by pedestrians

personal aims and is chosen from a set of behavioral alternatives with the objective of utility maximization.

Table I suggests a classification of stimuli into simple or standard situations that are well predictable and complex or new situations that may be modeled with probabilistic models. However, since a pedestrian is used to the situations he/she is normally confronted with, his/her reaction is usually rather automatic and determined by his/her experience of which reaction will be the best. It is therefore possible to put the rules of pedestrian behavior into an equation of motion. According to this equation the systematic temporal changes  $d\vec{w}_\alpha/dt$  of the preferred velocity  $\vec{w}_\alpha(t)$  of a pedestrian  $\alpha$  are described by a vectorial quantity  $\vec{F}_\alpha(t)$  that can be interpreted as a *social force*. Clearly, this force must represent the effect of the environment (e.g., other pedestrians or borders) on the behavior of the described pedestrian. However, the social force is not exerted by the environment on a pedestrian's body. It is rather a quantity that describes the concrete *motivation to act*. In the case of pedestrian behavior this motivation evokes the physical production of an acceleration or a deceleration force as a reaction to the perceived information that he/she obtains about his/her environment (see Fig. 1). In summary, one can say that a pedestrian acts *as if* he/she would be subject to external forces. This idea has been mathematically founded in Ref. [26].

### III. FORMULATION OF THE SOCIAL FORCE MODEL

In the following the main effects that determine the motion of a pedestrian  $\alpha$  will be introduced.

(i) He/She wants to reach a certain destination  $\vec{r}_\alpha^0$  as comfortable as possible. Therefore, he/she normally takes a way without detours, i.e., the shortest possible way. This way will usually have the shape of a polygon with edges  $\vec{r}_\alpha^1, \dots, \vec{r}_\alpha^n := \vec{r}_\alpha^0$ . If  $\vec{r}_\alpha^k$  is the next edge of this polygon to reach, his/her *desired direction*  $\vec{e}_\alpha(t)$  of motion will be

$$\vec{e}_\alpha(t) := \frac{\vec{r}_\alpha^k - \vec{r}_\alpha(t)}{\|\vec{r}_\alpha^k - \vec{r}_\alpha(t)\|}, \quad (1)$$

where  $\vec{r}_\alpha(t)$  denotes the *actual position* of pedestrian  $\alpha$  at time  $t$ . Exactly speaking, the goals of a pedestrian

are usually rather *gates* or *areas* than points  $\vec{r}_\alpha^k$ . In this case, he/she will at every time  $t$  steer for the *nearest point*  $\vec{r}_\alpha^k(t)$  of the corresponding gate/area.

If a pedestrian's motion is not disturbed, he/she will walk into the desired direction  $\vec{e}_\alpha(t)$  with a certain *desired speed*  $v_\alpha^0$ . A deviation of the *actual velocity*  $\vec{v}_\alpha(t)$  from the *desired velocity*  $\vec{v}_\alpha^0(t) := v_\alpha^0 \vec{e}_\alpha(t)$  due to necessary deceleration processes or avoidance processes leads to a tendency to approach  $\vec{v}_\alpha^0(t)$  again within a certain *relaxation time*  $\tau_\alpha$ . This can be described by an *acceleration term* of the form

$$\vec{F}_\alpha^0(\vec{v}_\alpha, v_\alpha^0 \vec{e}_\alpha) := \frac{1}{\tau_\alpha} (v_\alpha^0 \vec{e}_\alpha - \vec{v}_\alpha). \quad (2)$$

(ii) The motion of a pedestrian  $\alpha$  is influenced by other pedestrians. In particular, he/she keeps a certain distance from other pedestrians that depends on the pedestrian density and the desired speed  $v_\alpha^0$ . Here the *private sphere* of each pedestrian, which can be interpreted as *territorial effect* [27], plays an essential role. A pedestrian normally feels increasingly uncomfortable the closer he/she gets to a strange person, who may react in an aggressive way. This results in *repulsive effects* of other pedestrians  $\beta$  that can be represented by vectorial quantities

$$\vec{f}_{\alpha\beta}(\vec{r}_{\alpha\beta}) := -\nabla_{\vec{r}_{\alpha\beta}} V_{\alpha\beta}[b(\vec{r}_{\alpha\beta})]. \quad (3)$$

We will assume that the repulsive potential  $V_{\alpha\beta}(b)$  is a monotonic decreasing function of  $b$  with equipotential lines having the form of an ellipse that is directed into the direction of motion. The reason for this is that a pedestrian requires space for the next step, which is taken into account by other pedestrians.  $b$  denotes the semiminor axis of the ellipse and is given by

$$2b := \sqrt{(\|\vec{r}_{\alpha\beta}\| + \|\vec{r}_{\alpha\beta} - v_\beta \Delta t \vec{e}_\beta\|)^2 - (v_\beta \Delta t)^2}, \quad (4)$$

where  $\vec{r}_{\alpha\beta} := \vec{r}_\alpha - \vec{r}_\beta$ .  $s_\beta := v_\beta \Delta t$  is of the order of the step width of pedestrian  $\beta$ . Despite the simplicity of this approach, it describes avoidance maneuvers of pedestrians quite realistically.

A pedestrian also keeps a certain distance from *borders* of buildings, walls, streets, obstacles, etc. [8]. He/She feels more uncomfortable the closer to a border he/she walks since he/she has to pay more attention to avoid

the danger of getting hurt, e.g., by accidentally touching a wall. Therefore, a border  $B$  evokes a *repulsive effect* that can be described by

$$\vec{F}_{\alpha B}(\vec{r}_{\alpha B}) := -\nabla_{\vec{r}_{\alpha B}} U_{\alpha B}(\|\vec{r}_{\alpha B}\|) \quad (5)$$

with a repulsive and monotonic decreasing potential  $U_{\alpha B}(\|\vec{r}_{\alpha B}\|)$ . Here the vector  $\vec{r}_{\alpha B} := \vec{r}_{\alpha} - \vec{r}_B^{\alpha}$  has been introduced, where  $\vec{r}_B^{\alpha}$  denotes the location of that piece of border  $B$  that is nearest to pedestrian  $\alpha$ .

(iii) Pedestrians are sometimes attracted by other persons (friends, street artists, etc.) or objects (e.g., window displays). These *attractive effects*  $\vec{f}_{\alpha i}$  at places  $\vec{r}_i$  can be modeled by attractive, monotonic increasing potentials  $W_{\alpha i}(\|\vec{r}_{\alpha i}\|, t)$  in a way similar to the repulsive effects:

$$\vec{f}_{\alpha i}(\|\vec{r}_{\alpha i}\|, t) := -\nabla_{\vec{r}_{\alpha i}} W_{\alpha i}(\|\vec{r}_{\alpha i}\|, t) \quad (6)$$

( $\vec{r}_{\alpha i} := \vec{r}_{\alpha} - \vec{r}_i$ ). The main difference is that the *attractiveness*  $\|\vec{f}_{\alpha i}\|$  is normally decreasing with time  $t$  since the interest is declining. The attractive effects are, e.g., responsible for the formation of pedestrian groups (that are comparable to molecules).

However, the formulas above for attractive and repulsive effects only hold for situations that are perceived in the desired direction  $\vec{e}_{\alpha}(t)$  of motion. Situations located behind a pedestrian will have a weaker influence  $c$  with  $0 < c < 1$ . In order to take this effect of perception (i.e., of the *effective angle*  $2\varphi$  of *sight*) into account we have to introduce the direction dependent weights

$$w(\vec{e}, \vec{f}) := \begin{cases} 1 & \text{if } \vec{e} \cdot \vec{f} \geq \|\vec{f}\| \cos \varphi \\ c & \text{otherwise.} \end{cases} \quad (7)$$

In summary, the repulsive and attractive effects on a pedestrian's behavior are given by

$$\begin{aligned} \vec{F}_{\alpha\beta}(\vec{e}_{\alpha}, \vec{r}_{\alpha} - \vec{r}_{\beta}) &:= w(\vec{e}_{\alpha}, -\vec{f}_{\alpha\beta}) \vec{f}_{\alpha\beta}(\vec{r}_{\alpha} - \vec{r}_{\beta}), \\ \vec{F}_{\alpha i}(\vec{e}_{\alpha}, \vec{r}_{\alpha} - \vec{r}_i, t) &:= w(\vec{e}_{\alpha}, \vec{f}_{\alpha i}) \vec{f}_{\alpha i}(\vec{r}_{\alpha} - \vec{r}_i, t). \end{aligned} \quad (8)$$

We can now set up the equation for a pedestrian's total motivation  $\vec{F}_{\alpha}(t)$ . Since all the previously mentioned effects influence a pedestrian's decision at the same moment, we will assume that their total effect is given by the sum of all effects, as in the case of forces. This results in

$$\begin{aligned} \vec{F}_{\alpha}(t) &:= \vec{F}_{\alpha}^0(\vec{v}_{\alpha}, v_{\alpha}^0 \vec{e}_{\alpha}) + \sum_{\beta} \vec{F}_{\alpha\beta}(\vec{e}_{\alpha}, \vec{r}_{\alpha} - \vec{r}_{\beta}) \\ &+ \sum_B \vec{F}_{\alpha B}(\vec{e}_{\alpha}, \vec{r}_{\alpha} - \vec{r}_B^{\alpha}) \\ &+ \sum_i \vec{F}_{\alpha i}(\vec{e}_{\alpha}, \vec{r}_{\alpha} - \vec{r}_i, t). \end{aligned} \quad (9)$$

The *social force model* is now defined by

$$\frac{d\vec{w}_{\alpha}}{dt} := \vec{F}_{\alpha}(t) + \text{fluctuations.} \quad (10)$$

Here we have added a *fluctuation term* that takes into account random variations of the behavior. These fluctuations stem from ambiguous situations in which two or more behavioral alternatives are equivalent (e.g., if the

utility of passing an obstacle on the right- or the left-hand side is the same). In addition, fluctuations arise from accidental or deliberate deviations from the usual rules of motion.

In order to complete the model of pedestrian dynamics a relation between the actual velocity  $\vec{v}_{\alpha}(t)$  and the preferred velocity  $\vec{w}_{\alpha}(t)$  must be introduced. Since the actual speed is limited by a pedestrian's *maximal acceptable speed*  $v_{\alpha}^{\max}$ , we will assume that the *realized motion* is given by

$$\frac{d\vec{r}_{\alpha}}{dt} = \vec{v}_{\alpha}(t) := \vec{w}_{\alpha}(t) g\left(\frac{v_{\alpha}^{\max}}{\|\vec{w}_{\alpha}\|}\right) \quad (11)$$

with

$$g\left(\frac{v_{\alpha}^{\max}}{\|\vec{w}_{\alpha}\|}\right) := \begin{cases} 1 & \text{if } \|\vec{w}_{\alpha}\| \leq v_{\alpha}^{\max} \\ v_{\alpha}^{\max}/\|\vec{w}_{\alpha}\| & \text{otherwise.} \end{cases} \quad (12)$$

Note that the pedestrian model (10) and (11) has the form of nonlinearly coupled Langevin equations. A simplified version of it can be extended to an *active walker model* [28–30] for the self-organization of systems of ways [31]. This is related to the mathematical description of trunk trail formation by ants [32].

#### IV. COMPUTER SIMULATIONS

The model of pedestrian dynamics developed in Sec. III has been simulated on a computer for a large number of interacting pedestrians confronted with different situations. Despite the fact that the proposed model is very simple, it describes many observed phenomena very realistically. In the following, two examples will be presented, showing the *self-organization* of collective phenomena of pedestrian behavior.

The simulations assume that the desired speeds  $v^0$  are Gaussian distributed [4,7] with mean  $\langle v^0 \rangle = 1.34 \text{ ms}^{-1}$  and standard deviation  $\sqrt{\theta} = 0.26 \text{ ms}^{-1}$  [33]. Speeds were limited to  $v_{\alpha}^{\max} = 1.3v_{\alpha}^0$ . Pedestrians enter the walkway at the ends at random positions. Those intending to walk from the left- to the right-hand side are represented by full circles, whereas pedestrians intending to move in the opposite direction are represented by empty circles. The diameter of a circle is a measure for the actual speed  $\|\vec{v}_{\alpha}\|$  of a pedestrian  $\alpha$ . For simplicity, no attractive effects  $\vec{f}_{\alpha i}$  or fluctuations were taken into account. The repulsive potentials were assumed to decrease exponentially, i.e.,

$$V_{\alpha\beta}(b) = V_{\alpha\beta}^0 e^{-b/\sigma}, \quad U_{\alpha B}(\|\vec{r}_{\alpha B}\|) = U_{\alpha B}^0 e^{-\|\vec{r}_{\alpha B}\|/R} \quad (13)$$

with  $V_{\alpha\beta}^0 = 2.1 \text{ m}^2 \text{ s}^{-2}$ ,  $\sigma = 0.3 \text{ m}$  and  $U_{\alpha B}^0 = 10 \text{ m}^2 \text{ s}^{-2}$ ,  $R = 0.2 \text{ m}$ . Potentials with a hard core would be more realistic, of course, but they will not yield other results since the simulated pedestrians always keep enough distance.

Walkways were chosen 10 m wide. For  $\Delta t$  in formula (4) we took  $\Delta t = 2 \text{ s}$  and for the relaxation times we used  $\tau_{\alpha} = 0.5 \text{ s}$ . Smaller values of  $\tau_{\alpha}$  let the pedestrians walk

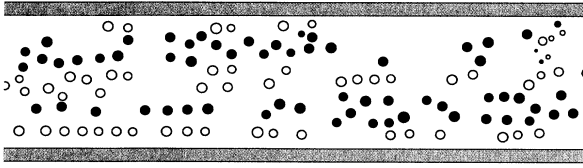


FIG. 2. Above a critical pedestrian density one can observe the formation of lanes consisting of pedestrians with a uniform walking direction. Here the computational result shows  $N = 4$  (or 5) lanes on a walkway that is 10 m wide and 50 m long. Empty circles represent pedestrians with a desired direction of motion that is opposite that of pedestrians symbolized by full circles.

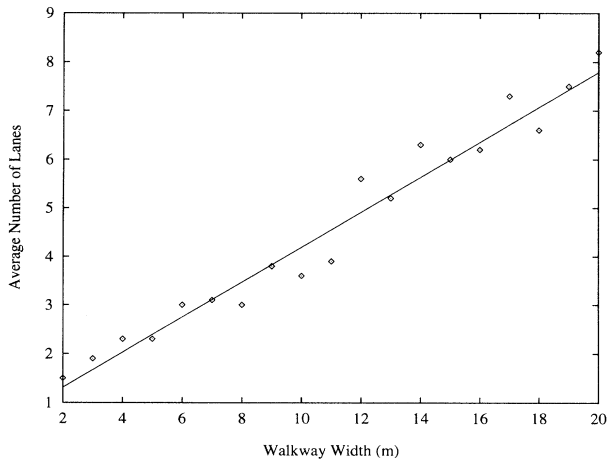


FIG. 3. The average number  $N$  of lanes emerging on a walkway scales linearly with its width  $W$  [ $N(W) = 0.36 \text{ m}^{-1}W + 0.59$ ].

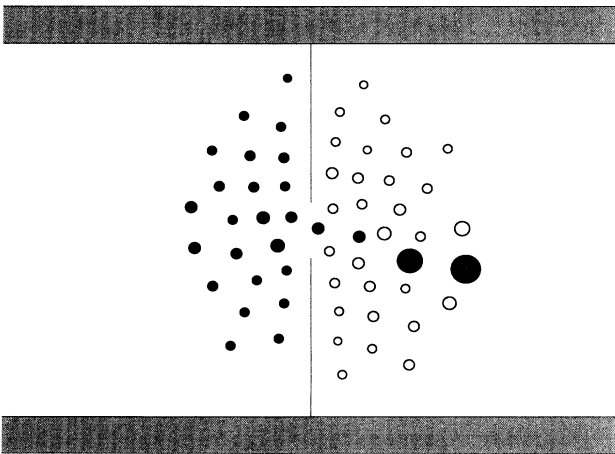


FIG. 4. If one pedestrian has been able to pass a narrow door, other pedestrians with the same desired walking direction can follow easily whereas pedestrians with an opposite desired direction of motion have to wait. The diameters of the circles are a measure for the actual velocity of motion.

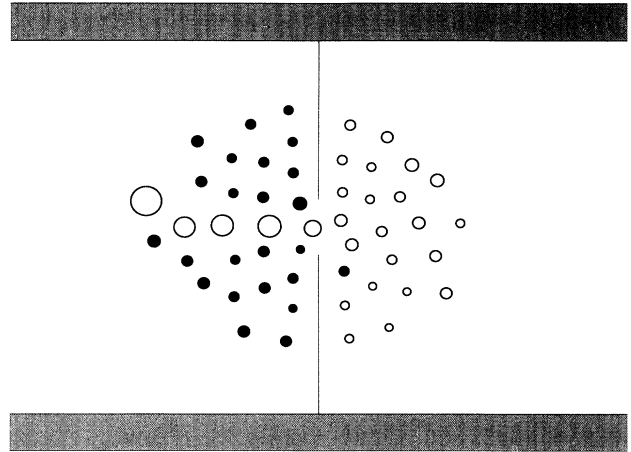


FIG. 5. After some time the pedestrian stream is stopped and the door is captured by individuals who pass the door into the opposite direction.

more aggressively. Finally, the effective angle of sight (which also takes into account head movements) was set to  $2\varphi = 200^\circ$ . Situations outside the angle of sight were assumed to have an influence of  $c = 0.5$ . The model parameters introduced above were chosen in a way that is compatible with empirical data.

Figure 2 shows the empirically confirmed [6] development of dynamically varying lanes consisting of pedestrians who intend to walk in the same direction. Periodic boundary conditions in the transversal direction would stabilize these lanes since they would no longer be destroyed at the ends of the walkway by randomly entering pedestrians [2,21]. Figure 3 shows the number of forming lanes in dependence of the width of the walkway for a pedestrian density of  $0.3 \text{ m}^{-2}$ .

The segregation effect of lane formation is *not* a result of the initial pedestrian configuration but a consequence of the pedestrians' interactions. Nevertheless, it normally leads to a more effective pedestrian flow since time-consuming avoidance maneuvers occur less frequently.

Figures 4 and 5 depict different moments of two pedestrian groups that try to pass a narrow door into opposite directions. The corresponding simulation shows the following. Once a pedestrian has passed the door, other pedestrians intending to move into the same direction are able to follow him/her easily (see Fig. 4). However, the stream of passing pedestrians is stopped by the pressure of the opposing group after some time. Subsequently, the door is captured by pedestrians who pass the door into the opposite direction (see Fig. 5). This change of the passing direction may occur several times and is well known from observations.

## V. SUMMARY AND OUTLOOK

It has been shown that pedestrian motion can be described by a simple social force model for individual pedestrian behavior. Computer simulations of pedestrian

groups demonstrated (i) the development of lanes consisting of pedestrians who walk into the same direction and (ii) oscillatory changes of the walking direction at narrow passages. These spatiotemporal patterns arise due to the *nonlinear interactions* of pedestrians. They are *not* the effect of strategical considerations of the individual pedestrians since they were assumed to behave in a rather “automatic” way.

Presently, the social force model is extended by a model for the route choice behavior of pedestrians. As soon as the computer program is completed it will provide a comfortable tool for town and traffic planning.

The investigation of pedestrian behavior is an ideal starting point for the development of other or more gen-

eral quantitative behavioral models, since the variables of pedestrian motion are easily measured so that corresponding models are comparable with empirical data. A further step could be the application of the social force concept to the description of opinion formation, group dynamics, or other social phenomena [26]. For this purpose, an abstract behavioral space has to be introduced.

#### ACKNOWLEDGMENTS

The authors want to thank W. Weidlich, M. R. Schroeder, and W. Scholl for valuable and inspiring discussions.

- 
- [1] D. Helbing, *Complex Syst.* **6**, 391 (1992).
  - [2] D. Helbing, Diplom thesis, Georg-August University, Göttingen, Germany, 1990.
  - [3] D. Helbing, *Stochastische Methoden, nichtlineare Dynamik und quantitative Modelle sozialer Prozesse* (Shaker, Aachen, 1993).
  - [4] L. F. Henderson, *Nature* **229**, 381 (1971).
  - [5] L. F. Henderson, *Transp. Res.* **8**, 509 (1974).
  - [6] D. Oeding, *Verkehrsbelastung und Dimensionierung von Gehwegen und anderen Anlagen des Fußgängerverkehrs* (Straßenbau und Straßenverkehrstechnik, Bonn, 1963), Vol. 22.
  - [7] F. P. D. Navin and R. J. Wheeler, *Traffic Eng.* **39**, 30 (1969).
  - [8] *Highway Capacity Manual*, Special Report No. 209, edited by Transportation Research Board (National Research Council, Washington, D.C., 1985), Chap. 13.
  - [9] G. P. Gipps and B. Marksjö, *Math. Comput. Simul.* **27**, 95 (1985).
  - [10] A. Borgers and H. Timmermans, *Geogr. Anal.* **18**, 115 (1986).
  - [11] G. G. Løvås, in *Proceedings of the 1993 European Simulation Multiconference, Lyon, 1993*, edited by A. Pave (Society for Computer Simulation International, Ghent, Belgium, 1993).
  - [12] I. Prigogine and R. Herman, *Kinetic Theory of Vehicular Traffic* (American Elsevier, New York, 1971).
  - [13] S. L. Paveri-Fontana, *Transp. Res.* **9**, 225 (1975).
  - [14] B. S. Kerner and P. Konhäuser, *Phys. Rev. E* **48**, 2335 (1993).
  - [15] B. S. Kerner and P. Konhäuser, *Phys. Rev. E* **50**, 54 (1994).
  - [16] D. Helbing, *Phys. Rev. E* **51**, 3164 (1995).
  - [17] O. Biham, A. A. Middleton, and D. Levine, *Phys. Rev. A* **46**, 6124 (1992).
  - [18] K. Nagel and M. Schreckenberg, *J. Phys. (France) I* **2**, 2221 (1992).
  - [19] T. Nagatani, *Phys. Rev. E* **48**, 3290 (1993).
  - [20] J. A. Cuesta, F. C. Martínez, J. M. Molera, and A. Sánchez, *Phys. Rev. E* **48**, 4175 (1993).
  - [21] D. Helbing, *Behav. Sci.* **36**, 298 (1991).
  - [22] D. Helbing, in *Natural Structures. Principles, Strategies, and Models in Architecture and Nature* (Sonderforschungsbereich 230, Stuttgart, 1992), Pt. II, pp. 93–98.
  - [23] W. Weidlich and G. Haag, *Concepts and Models of a Quantitative Sociology* (Springer, Berlin, 1983).
  - [24] W. Weidlich, *Phys. Rep.* **204**, 1 (1991).
  - [25] K. Lewin, *Field Theory in Social Science* (Harper, New York, 1951).
  - [26] D. Helbing, *Physica A* **196**, 546 (1993).
  - [27] A. E. Schefflen and N. Ashcraft, *Human Territories: How We Behave in Space-Time* (Prentice-Hall, Englewood Cliffs, NJ, 1976).
  - [28] R. D. Freimuth and L. Lam, in *Modeling Complex Phenomena*, edited by L. Lam and V. Naroditsky (Springer, New York, 1992).
  - [29] D. R. Kayser, L. K. Aberle, R. D. Pochy, and L. Lam, *Physica A* **191**, 17 (1992).
  - [30] F. Schweitzer and L. Schimansky-Geier, *Physica A* **206**, 359 (1994).
  - [31] D. Helbing, P. Molnár, and F. Schweitzer, in *Evolution of Natural Structures* (Sonderforschungsbereich 230, Stuttgart, 1994), pp. 229–234.
  - [32] F. Schweitzer, K. Lao, and F. Family (unpublished).
  - [33] U. Weidmann, *Transporttechnik der Fußgänger* (Schriftenreihe des Instituts für Verkehrsplanung, Transporttechnik, Straßen- und Eisenbahnbau Nr. 90, ETH Zürich, 1993), pp. 87 and 88.