

Measurement of Local Dissipation Scales in Turbulent Pipe Flow

S. C. C. Bailey,¹ M. Hultmark,¹ J. Schumacher,² V. Yakhot,³ and A. J. Smits¹

¹*Department of Mechanical and Aerospace Engineering, Princeton University, Princeton, New Jersey 08540, USA*

²*Department of Mechanical Engineering, Technische Universität Ilmenau, D-98684 Ilmenau, Germany*

³*Department of Mechanical Engineering, Boston University, Boston, Massachusetts 02215, USA*

(Received 3 March 2009; published 29 June 2009)

Local dissipation scales are a manifestation of the intermittent small-scale nature of turbulence. We report the first experimental evaluation of the distribution of local dissipation scales in turbulent pipe flows for a range of Reynolds numbers: $2.4 \times 10^4 \leq \text{Re}_D \leq 7.0 \times 10^4$. Our measurements at the nearly isotropic pipe center line and within the anisotropic logarithmic layer show excellent agreement with distributions that were previously calculated from numerical simulations of homogeneous isotropic box turbulence and with those predicted by theory. The reported results suggest a universality of the smallest-scale fluctuations around the classical Kolmogorov dissipation length.

DOI: 10.1103/PhysRevLett.103.014502

PACS numbers: 47.27.eb, 47.27.nf

The dissipation of turbulent kinetic energy is driven by fluctuations of velocity gradients whose amplitudes can locally and instantaneously greatly exceed their mean value, resulting in spatially intermittent regions of high rates of turbulent dissipation within a turbulent flow field [1,2]. The statistical mean of the turbulent kinetic energy dissipation rate equals the average flux of energy from the energy-containing large-scale eddies down to the smallest ones in the case of statistically stationary turbulent fluid motion [3]. In the classical theory of turbulence, this small-scale end of the turbulent cascade is then prescribed by the Kolmogorov dissipation scale η_K which is derived as $\eta_K = \nu^{3/4} / \langle \epsilon \rangle^{1/4}$, where ν is the kinematic viscosity of the fluid and $\langle \epsilon \rangle$ is the mean of the energy dissipation rate field which is given by $\epsilon(\mathbf{x}, t) = (\nu/2)(\partial_i u_j + \partial_j u_i)^2$. But is η_K the smallest scale in a turbulent flow? The Kolmogorov dissipation length contains the mean dissipation rate $\langle \epsilon \rangle$ and does not consider the strongly intermittent nature of $\epsilon(\mathbf{x}, t)$. It seems therefore natural to capture these fluctuations in a dissipation scale definition and to refine the notion of one *mean* dissipation length to that of a whole continuum of *local* dissipation scales. The finest of those scales will then be associated with the steepest velocity gradients or, alternatively, with the highest-amplitude shear and vorticity events in turbulence. This was done first within the multifractal formalism and demonstrated that local scales below η_K will exist [4–7]. An alternative approach to such a continuum of dissipation scales was suggested by Yakhot [8,9]. When connecting a local scale η and the velocity increment across that scale $\delta_\eta u = |u(x + \eta) - u(x)|$, the following relation:

$$\eta \delta_\eta u \approx \nu \quad (1)$$

was obtained from the Navier-Stokes equations of fluid motion by a so-called point-splitting technique. Put into another perspective, a *local* Reynolds number obeying this scale and velocity as their characteristic amplitudes will be

$\text{Re}_\eta = \eta \delta_\eta u / \nu = O(1)$. Such a Reynolds number is then also associated with fluid motion at the crossover scales between the inertial cascade range and the viscous dissipation range.

The probability density function (PDF) of the local dissipation scales $Q(\eta)$ contains scales larger and smaller than the classical Kolmogorov dissipation length and can be calculated analytically on the basis of these ideas [9]. The analytic result was found recently to be in good agreement with a direct calculation from high-resolution numerical simulation data of three-dimensional homogeneous isotropic box turbulence [10,11]. The numerical simulations in Ref. [10] were conducted for relatively low Taylor-microscale Reynolds numbers [$14 \leq \text{Re}_\lambda \leq 151$, where $\text{Re}_\lambda = u'_x \lambda / \nu$, $\lambda = \sqrt{2(15\nu u_x'^2) / \langle \epsilon \rangle}$ and the standard deviation of the turbulent velocity component is u'_x] lacking even traces of inertial range. Still the scaling of moments of velocity gradients with a Reynolds number agreed with the predictions which are obtained when using the scaling exponents of inertial range structure functions for high-Reynolds number flows. This somewhat unexpected result suggested that the existence of a well-developed inertial range might not be essential for achieving an asymptotic regime of the small-scale gradient statistics.

In this Letter, we want to advance these ideas into two directions. We report the first experimental confirmation of the local dissipation scale concept in a laboratory flow. Furthermore, we demonstrate the robustness of the concept beyond the idealized situation of homogeneous isotropic box turbulence. The flow at hand is a turbulent pipe flow in which a mean shear and thus an inhomogeneous (radial) direction are present. Interestingly, we can also report that the monitored dissipation scale distributions at the nearly isotropic pipe center line and in the strongly anisotropic logarithmic layer are almost identical for the range of Reynolds numbers that is spanned by the experiment.

Additionally, they are in very good agreement with those of the numerical simulations [11] and the analytical result [9]. Our experiments span a Reynolds number range of $76 \leq \text{Re}_\lambda \leq 214$.

Description of the pipe flow experiment.—The experiments were conducted using the Princeton University/ONR Superpipe [12], which consists of a closed return-pressure vessel containing a long test pipe downstream of flow-conditioning and heat-exchanging sections. The current set of measurements was performed using air at room temperature and atmospheric pressure. The test section used during these experiments consisted of a commercial steel pipe [13] with an average inner radius of $R = 64.9$ mm and an overall length of $200D$. Experiments were performed over an interval of pipe flow Reynolds numbers (based on pipe diameter D and area averaged velocity U_B) of $2.4 \times 10^4 \leq \text{Re}_D = U_B D / \nu \leq 7.0 \times 10^4$. As detailed in Refs. [12,13], over this Reynolds number range, the flow at the test section of the pipe was fully developed, smooth walled turbulent pipe flow.

Velocity measurements of streamwise velocity U_x were performed with a single sensor hot-wire probe $2.5 \mu\text{m}$ in diameter and having a sensing length of $l = 0.5$ mm. The wire was operated at an overheat ratio of 1.8. Analog output from the anemometer was low-pass filtered at half the sample frequency using an external filter before being digitized using a 16-bit simultaneous sample and hold analog to digital board. The sampling rate was altered between 100 and 200 kHz in order to maximize the temporal resolution while not exceeding the measured frequency response of the probe. Data were sampled for 30 min continuously. During this period, the flow temperature was found to remain relatively constant, changing by less than 1°C .

Hot-wire probe calibrations were performed at the pipe center line using a Pitot-probe/wall pressure tap combination. Calibrations were performed before and after each 30 min measurement. Data sets where voltage drift was observed were discarded.

Measurements were performed at two positions, the first located at the pipe center line and the second within the logarithmic layer at a distance from the wall of $y = 0.1R$. The flow conditions for each measurement are provided in Tables I and II for the $y/R = 1$ and $y/R = 0.1$ measurements, respectively.

Confidence limits of the measurements.—When resolving the small-scale structures of turbulence using hot-wire anemometry, the limitation imposed by the finite sensor length of the probe is an important consideration. Insufficient spatial resolution will filter the energy at scales smaller than the probe. For the current measurements, the probe sensor length was of the order of the Kolmogorov scale with a maximum of $l \approx 4\eta_K$. Although it has been observed that the energy spectrum can be well resolved for

TABLE I. Experiment conditions for measurements performed at $y/R = 1$. \bar{U}_x is the time averaged streamwise velocity.

Re_D	Re_L	Re_λ	\bar{U}_x (m/s)	u'_x (m/s)	L (m)	η_K (mm)	$\langle \epsilon \rangle$ (m^2/s^2)
24 000	230	76	3.3	0.12	0.029	0.47	0.07
28 000	290	87	3.9	0.15	0.029	0.40	0.13
35 000	340	92	4.9	0.17	0.029	0.35	0.21
44 000	440	106	6.0	0.21	0.030	0.31	0.39
52 000	560	116	7.2	0.25	0.033	0.27	0.62
60 000	700	124	8.3	0.29	0.036	0.25	0.90
70 000	780	135	9.5	0.33	0.036	0.22	1.31

turbulence scales up to $0.05l$ [14], the impact of spatial filtering on the instantaneous velocity is not well understood; thus, full confidence can be given only for measurements of η for scales larger than l .

The scaled one-dimensional energy spectra $\phi(k_x)$ are plotted in Fig. 1 for the center line, $y/R = 1.0$, and in the logarithmic layer, $y/R = 0.1$. Streamwise wave number k_x was estimated from frequency f using Taylor's frozen flow hypothesis through $2\pi f / \bar{U}_x$. As can be observed in Fig. 1, the signal to noise ratio fell below 1 (as indicated by the inflection point in the measured spectra) at wave numbers larger than the Kolmogorov range for all data sets. Note that the appearance of this noise is consistent with the so-called f^2 noise typically observed in constant temperature anemometry.

An isotropic estimate of the mean dissipation rate can be found through integration of the one-dimensional dissipation spectrum

$$\langle \epsilon \rangle = 15\nu \int_0^\infty k_x^2 \phi(k_x) dk_x. \quad (2)$$

The measured dissipation spectra, shown in Fig. 2, indicate that the range of wave numbers over which dissipation occurred were well resolved during these measurements. Thus, the measured PDFs are expected to be largely insensitive to the influence of spatial filtering and instrumentation noise. The insensitivity of the results to the changing Reynolds number and η_K in Fig. 3 confirm this expectation. Full confidence, however, can be given only to results for values of η larger than the scales at which these effects are expected to occur. These minimum confidence limits are quantified in Table III.

TABLE II. Experiment conditions for measurements performed at $y/R = 0.1$.

Re_D	Re_L	Re_λ	\bar{U}_x (m/s)	u'_x (m/s)	L (m)	η_K (mm)	$\langle \epsilon \rangle$ (m^2/s^2)
35 000	1300	155	3.4	0.41	0.047	0.19	2.4
52 000	1900	185	5.1	0.59	0.050	0.15	6.8
70 000	2700	214	6.7	0.76	0.055	0.13	14

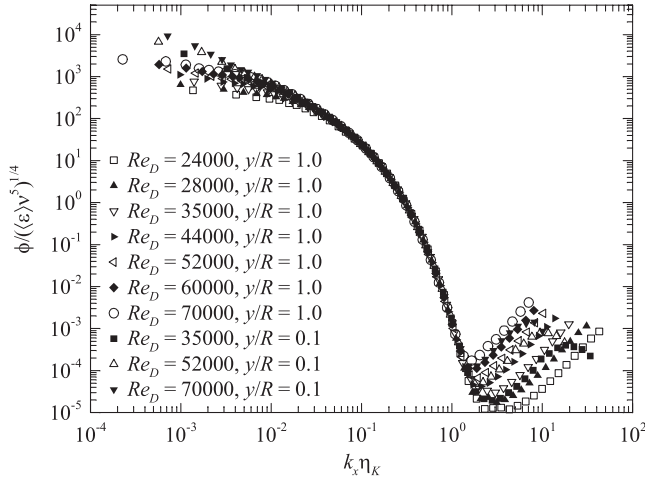


FIG. 1. One-dimensional turbulence energy spectra measured for all cases. The legend indicates whether the data are obtained at the center line $y/R = 1.0$ or in the logarithmic layer $y/R = 0.1$.

Distribution of local dissipation scales.—The PDF of η , $Q(\eta)$, can be calculated by a saddle-point approximation [9] within the range $0 < \eta < L$ as

$$Q(\eta) = \frac{1}{\pi \eta [b \log(L/\eta)]^{1/2}} \times \int_{-\infty}^{\infty} dx \exp \left[-x^2 - \frac{\{\log[\sqrt{2}x \text{Re}_L (\eta/L)^{a+1}]\}^2}{4b \log(L/\eta)} \right], \quad (3)$$

where $a = 0.383$, $b = 0.0166$ [11], L is the integral length scale of the turbulence, and $\text{Re}_L = \langle |u_x(x+L) - u_x(x)|^2 \rangle^{1/2} L / \nu$ as used in Ref. [11]. The PDF was calculated from each velocity time series using the following procedure. First, the velocity difference $\Delta u(\Delta t) = |U_x(t +$

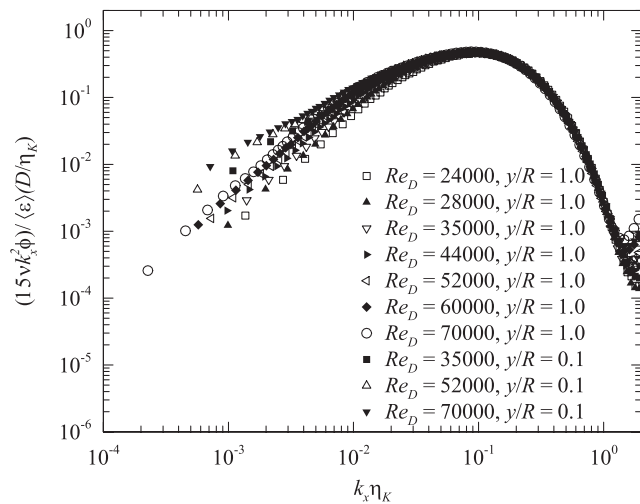


FIG. 2. Measured dissipation spectrum for all cases. Data are the same as in Fig. 1.

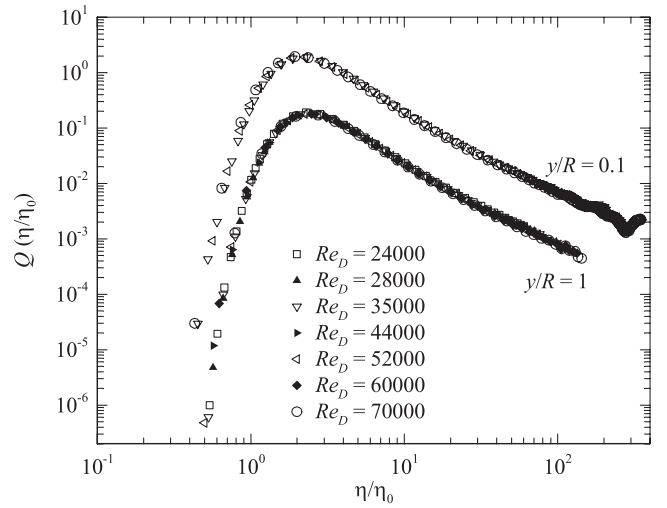


FIG. 3. Measured PDFs of the local dissipation scales for all Reynolds numbers. Results from the logarithmic layer $y/R = 0.1$ are shifted vertically by a decade for clarity.

$\Delta t) - U_x(t)]$ was calculated at each discrete time t . Next, the value $\Delta u(\Delta t) \bar{U}_x \Delta t / \nu$ was calculated, and the instances where the result was between 0.9 and 2 were counted as occurrences of dissipation at a scale $\eta = \Delta t \bar{U}_x$. This process was repeated for all Δt up to $\Delta t \bar{U}_x = L$. Finally, $Q(\eta)$ was found from the count of occurrences by normalizing such that $\int Q(\eta) d\eta = 1$.

The results are shown in Fig. 3, normalized by the value $\eta_0 = L \text{Re}_L^{-0.72}$ [11], which is very close to η_K . At each measurement location there was excellent collapse of $Q(\eta/\eta_0)$ for all measured Reynolds numbers. This Reynolds number independence indicates that the high-wave number end of the universal equilibrium range could establish universality at lower Reynolds numbers than previously expected. This appears to be true even though the scale separation between the energy-containing eddies

TABLE III. Minimum values of η which can be considered fully free of effects of η_l sensor spatial resolution and η_f signal noise (defined using the wave number where the signal to noise ratio exceeded 10). Scales are also shown normalized by $\eta_0 = L \text{Re}_L^{0.72}$.

Re_λ	η_l (mm)	η_l/η_0	η_f (mm)	η_f/η_0
76	0.5	1.0	1.4	2.9
87	0.5	1.2	1.4	3.5
92	0.5	1.4	1.5	4.1
106	0.5	1.6	1.3	4.2
116	0.5	1.7	1.3	4.7
124	0.5	1.9	1.4	5.2
135	0.5	2.0	1.4	5.8
155	0.5	2.2	1.0	4.5
185	0.5	2.8	0.7	3.8
214	0.5	3.2	0.5	3.0

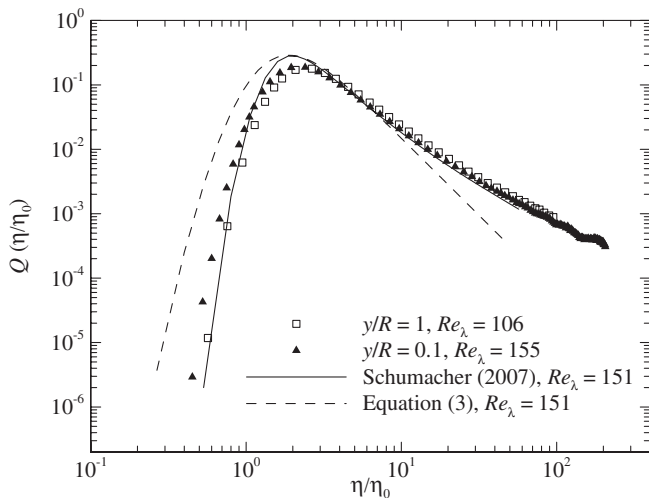


FIG. 4. Comparison among $Q(\eta/\eta_0)$ measured at pipe center line $y/R = 1.0$, measured at $y/R = 0.1$, the numerical results of Ref. [11], and the theoretical distribution of Ref. [9].

and dissipation scales is still relatively small and before even the establishment of an inertial subrange (see Fig. 1).

Direct comparison is made in Fig. 4 between $Q(\eta/\eta_0)$ measured in the nearly isotropic turbulence at the pipe center line and the anisotropic log layer. Here one can see nearly identical distributions at all but the smallest values of η/η_0 , where a slightly increased probability was observed at $y/R = 0.1$. Such a good agreement indicates that the structure of turbulence at the largest scales has little effect on the organization of the smallest scales.

Comparison is also made in Fig. 4 among the present experimental results, the numerical results of Ref. [11], and the theoretical distribution of Ref. [9]. There is a very good agreement between the numerical and experimental results (at the center line) and also in the tails of the PDF at large η . The deviations from the theoretical distribution on both sides can be due to the limits of a saddle-point approximation for the evaluation of the Mellin transform in Ref. [9]. The agreement between the numerical and experimental results supports the concept of the universality of the distribution of the dissipation scales.

As mentioned above, Fig. 4 displays a further property. The left tail of the PDF $Q(\eta/\eta_0)$ becomes slightly fatter for the logarithmic layer in comparison to that of the center line. Since we found that the data for different Reynolds numbers collapse well (see Fig. 3), this property could be interpreted as a statistical fingerprint of bursting structures. So-called packets of hairpins have been observed recently in the logarithmic layer of other wall flows [15]. They were found to increase the level of small-scale intermittency which would be in accordance with the slightly smaller measured local dissipation scales. However, a clear disentanglement requires two things: further data records at higher Re combined with experiments in different flows.

Conclusions.—The probability density function of the local dissipation scales was measured in a turbulent pipe flow over a range of Reynolds numbers at the pipe center line and in the logarithmic layer. For the first time, we measured this probability density function experimentally in a turbulent shear flow. Our results indicate that the distribution is basically independent of both the Reynolds number and the degree of anisotropy of the large scales of turbulence. We find a very good agreement with the numerical simulations and the theory. This robustness of the results with respect to flow type (or degree of anisotropy) suggests a universality of the smallest-scale fluctuations in turbulence. One could thus indeed conclude that the turbulent dynamics at the finest scales is already in an asymptotic state, although the Reynolds numbers remain moderate and an inertial cascade range is absent or very small. It is well known that to observe inertial range statistics in wall-bounded flows requires large Reynolds numbers [16]. This fact adds further value to the present study which establishes a connection between shear flow and isotropic turbulence at their small scales.

We thank K. R. Sreenivasan for helpful suggestions and comments. S. B., M. H., and A. S. are supported by the Office of Naval Research (ONR) under Grant No. N00014-07-1-0111. Support for S. B. was provided by the PDF program of the Natural Sciences and Engineering Research Council (NSERC). J. S. is supported by the Heisenberg Program of the Deutsche Forschungsgemeinschaft (DFG) under Grant No. SCHU1410/5-1.

-
- [1] K. R. Sreenivasan and R. A. Antonia, *Annu. Rev. Fluid Mech.* **29**, 435 (1997).
 - [2] T. Ishihara, T. Gotoh, and Y. Kaneda, *Annu. Rev. Fluid Mech.* **41**, 165 (2009).
 - [3] A. N. Kolmogorov, *Dokl. Akad. Nauk SSSR* **30**, 299 (1941).
 - [4] G. Paladin and A. Vulpiani, *Phys. Rev. A* **35**, 1971 (1987).
 - [5] M. Nelkin, *Phys. Rev. A* **42**, 7226 (1990).
 - [6] U. Frisch and M. Vergassola, *Europhys. Lett.* **14**, 439 (1991).
 - [7] L. Biferale, *Phys. Fluids* **20**, 031703 (2008).
 - [8] V. Yakhot and K. R. Sreenivasan, *J. Stat. Phys.* **121**, 823 (2005).
 - [9] V. Yakhot, *Physica (Amsterdam)* **215D**, 166 (2006).
 - [10] J. Schumacher, K. R. Sreenivasan, and V. Yakhot, *New J. Phys.* **9**, 89 (2007).
 - [11] J. Schumacher, *Europhys. Lett.* **80**, 54001 (2007).
 - [12] M. V. Zagarola and A. J. Smits, *J. Fluid Mech.* **373**, 33 (1998).
 - [13] L. I. Langelandsvik, G. J. Kunkel, and A. J. Smits, *J. Fluid Mech.* **595**, 323 (2008).
 - [14] P. M. Ligrani and P. Bradshaw, *Exp. Fluids* **5**, 407 (1987).
 - [15] R. J. Adrian, *Phys. Fluids* **19**, 041301 (2007).
 - [16] S. G. Saddoughi and S. V. Veeravalli, *J. Fluid Mech.* **268**, 333 (1994).