



Leidenfrost Gas Ratchets Driven by Thermal Creep

Alois Würger

Laboratoire Ondes et Matière d'Aquitaine, Université de Bordeaux and CNRS, 331 cours de la Libération, 33405 Talence, France
(Received 22 July 2011; published 13 October 2011)

We show that thermal creep is at the origin of the recently discovered Leidenfrost ratchet, where liquid droplets float on a vapor layer along a heated sawtooth surface and accelerate to velocities of up to 40 cm/s. As the active element, the asymmetric temperature profile at each ratchet summit rectifies the vapor flow in the boundary layer. This mechanism works at low Reynolds number and provides a novel tool for controlling gas flow at nanostructured surfaces.

DOI: 10.1103/PhysRevLett.107.164502

PACS numbers: 47.61.-k, 47.15.Rq, 44.20.+b, 68.03.-g

Liquid spilled on a hot surface rapidly evaporates. At the Leidenfrost temperature well above the boiling point, however, one observes long-lived droplets that levitate due to the excess pressure resulting from the permanent feed of vapor at the bottom. Their contact-free suspension makes such Leidenfrost droplets very mobile. Linke *et al.* observed that, when placed on a millimeter-sized brass ratchet, the droplets rapidly accelerate to a speed of about 10 cm/s [1]. Very recently, Lagubeau *et al.* found that the same effect occurs for a piece of solid dry ice, and thus is not related to properties of the liquid phase [2]. Even more surprisingly, Ok *et al.* reported that reducing the ratchet profile to 200 nm has little effect on the droplet velocity [3].

Unlike other self-propulsion mechanisms based on chemical or thermal gradients [4–8], this motion is not directed along an applied field but rather arises from the asymmetric surface structure of the solid support. This sawtooth profile acts as a rectifier transferring momentum on the interstitial vapor; the resulting gas flow advects the floating Leidenfrost droplet. The experimental findings [1–3] suggest that there is a common principle that works for both liquids and solids, and independently of the height of the ratchet profile. Several ideas have been put forward, relying on nonuniform Laplace pressure and Marangoni forces in the droplet, surface vibrations, or rectification of the radial vapor flow through the nonlinear term of the Navier-Stokes equation [1–3,9]; yet none of them explains all of the mentioned experiments. In particular, the sub-micron ratchets of Ok *et al.* [3] exclude nonlinear hydrodynamics as the dominant mechanism, as illustrated in the left-hand panel of Fig. 1: For small profile D , the gas velocity and the effective Reynolds number Re in the ratchet layer are much smaller than at midheight where $Re \sim 1$ [2]; thus rectification is expected to disappear for $D \ll h_0$, whereas the data of Ok *et al.* rather show the opposite behavior.

In his 1879 attempt to explain Crookes' radiometer experiment and building on Reynolds' theory for thermal transpiration [10], Maxwell showed the existence of thermal-creep velocity along a solid-gas interface [11],

$$v_C = \frac{3}{4} \nu \frac{\nabla_{\parallel} T}{T}, \quad (1)$$

where ν is the kinematic viscosity of the vapor and $\nabla_{\parallel} T$ the parallel component of the temperature gradient. Kinetic theory relates this gas flow to the nonuniform density and velocity distribution: Molecules coming from the cold side and hitting the surface at a given point are more frequent but carry lower momentum than those from the hot side, thus resulting in an off-diagonal component of the surface stress and the boundary velocity v_C [11]. Thermal creep drives aerosol thermophoresis [12], repels air-suspended particles from a hot surface [13], and operates in small-scale gas flow devices such as thermally actuated micro-cantilevers and Knudsen pumps [14–19].

This Letter points out the role of thermal creep for self-propelling Leidenfrost droplets and, in particular, analyzes the flow around a ratchet summit. The essential argument is illustrated in the right-hand panel of Fig. 1. In the cleft below the droplet, there is a strong temperature gradient of several tens of Kelvin per micron. Because of the asymmetric profile, the horizontal component of the creep

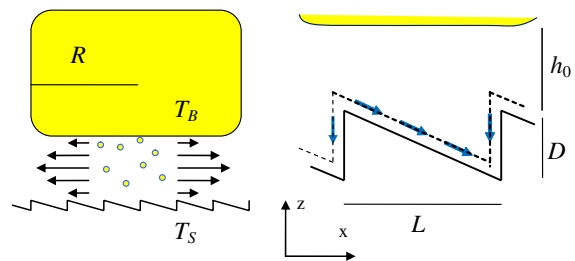


FIG. 1 (color online). Leidenfrost droplet on a ratchet. The left-hand panel shows the gas flow due to the evaporation at the bottom of a droplet of radius R ; the temperature of the solid T_S is significantly above the droplet's boiling temperature T_B . The arrows in the right-hand panel indicate the thermal-creep flow along the ratchet of period L and height D . The dashed line indicates the boundary layer; its thickness ℓ corresponds to the molecular mean-free path. In recent experiments the ratchet height D varies from 200 nm to about 1 mm; for small D one has $h_0 = 10\text{--}100 \mu\text{m}$.

velocity has a finite mean value; the resulting gas flow along the ratchet surface drags the droplet toward the right. Note that this argument does not rely on the existence of the outward gas flow illustrated in the left-hand panel of Fig. 1.

Our detailed analysis relies on Stokes hydrodynamics. In analogy to thermal transport in colloidal dispersions [20,21], the droplet velocity is derived from the overall force balance on a closed surface. In the absence of external forces in horizontal direction one has

$$\oint \sigma_{xn} dS = 0, \quad (2)$$

where σ_{xn} is the stress pulling in the x direction on the area element dS with normal n . The stress tensor $\sigma_{ij} = \sigma'_{ij} - P\delta_{ij}$ comprises a viscous part $\sigma'_{ij} = \eta(\partial_i v_j + \partial_j v_i)$ and the excess pressure P . A nonuniform flow velocity v in the cleft of width h creates a stress of the order $\eta v/h$, which by far exceeds the viscous drag at the remaining part of the droplet surface $\sim \eta v/R$. Thus the surface integral may be limited to the part between droplet and support; it closely follows the ratchet profile beyond the boundary layer, as indicated by the dashed line in Fig. 1.

The velocity profile in the cleft comprises two contributions of different origin. The first one, due to evaporation at the bottom of the droplet, is the outside gas flow in the left-hand panel of Fig. 1; in the framework of Stokes hydrodynamics it does not contribute to the stress integral. Thus, in the following we consider the second velocity term, which arises from the thermal creep along the ratchet profile, as indicated by the arrows in the right-hand panel.

The rectification mechanism is most obvious when comparing the viscous stress at the two slopes of the ratchet. The normal on the vertical part points in the x direction; the corresponding diagonal element $\sigma'_{xx} = 2\eta dv_x/dx$ vanishes since v_x and its derivative are zero. On the opposite side of slope $m = D/L$, the stress σ'_{xn} is finite. The hydrostatic pressure varies little along the profile and will be discarded, then Eq. (2) reduces to the condition

$$\langle \sigma'_{xz} \rangle = \frac{1}{L} \int_0^L \sigma'_{xz} dx = 0 \quad (3)$$

on the viscous drag on the slope of the ratchet tooth. If the droplet is immobile, the shear stress reads as $\sigma'_{xn} \approx -\eta v_c/h$, where h is the width of the cleft. In order to satisfy (3) the droplet moves at a velocity u , leading to $\sigma'_{xz} = \eta[u - v_c(x)]/h$. Inserting σ'_{xz} in (3) one readily obtains the expression for the drift velocity,

$$u = \frac{\langle v_c/h \rangle}{\langle 1/h \rangle}. \quad (4)$$

The temperature profile is determined by the boundary conditions at the solid-gas interface, imposing continuous temperature and heat flow through the interface. Because

of the important difference in thermal conductivity of the brass support and the vapor layer, $\kappa_V/\kappa_S \sim 10^{-4}$, the temperature profile is strongly distorted, and the gradient is much larger in the vapor phase.

For a first estimate we calculate ∇T_{\parallel} far from the corners, in the middle part of a ratchet tooth. In the limit $\kappa_V/\kappa_S \rightarrow 0$ the brass surface is at constant temperature T_S , and the profile in the cleft is given by $T(x, z) = T_B - (z/h)\Delta T$, where $\Delta T = T_S - T_B$ and $h = h_0 + xD/L$. The resulting temperature gradient is perpendicular on the solid-vapor and droplet-vapor interfaces. The velocity distribution of the molecules hitting the brass surface is given by the temperature profile evaluated at one mean-free path from the brass surface, $z = \ell - h$. At this finite distance, the gradient has a component parallel to the surface $\nabla T_{\parallel} \sim \Delta T \ell/h^2$. Replacing h with h_0 and discarding numerical factors gives a rough estimate for the drift velocity,

$$u \sim \nu \ell/h_0^2. \quad (5)$$

With the mean-free path $\ell = 130$ nm and the kinematic viscosity $\nu = 60$ mm²/s of vapor at 300 °C, and $h_0 \sim 10$ μm [22], one finds $u \sim 10$ cm/s, which is in qualitative agreement with experiment [1–3].

For the sake of a more quantitative description we refine the vapor temperature profile close to the upper corner of the ratchet, which is illustrated in Fig. 2 and which turns out to dominate the creep flow. In analogy to the electrostatic potential of a charged polygon, a simple conformal transformation provides the expression $T(r, \varphi) = T_S - \Delta T (r/h_0)^{\pi/\alpha} \sin(\pi\varphi/\alpha)$ [23], where r, φ are polar coordinates with respect to the corner. The angle α is related to the aspect ratio $m = D/L = -\cot\alpha$; for the ratchets of Ref. [3] one finds the exponent $\pi/\alpha \approx 0.63$. The resulting parallel component of the gradient along the dashed line close to point A reads [24]

$$\nabla T_{\parallel} = \hat{\xi} \Delta T \frac{\ell h_0^{-\pi/\alpha}}{r^{2-\pi/\alpha}}, \quad (6)$$

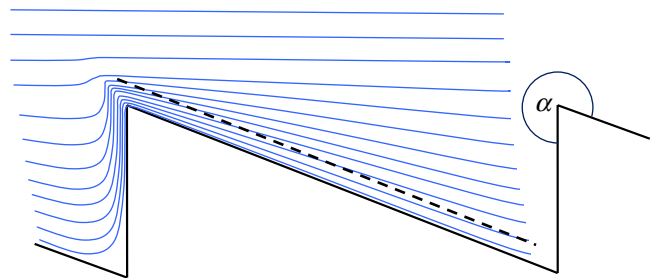


FIG. 2 (color online). Temperature profile close to a solid-vapor interface. Because of the small conductivity ratio κ_V/κ_S , the isotherms (solid lines) are strongly distorted. At a distance of one molecular mean-free path from the hot surface (dashed line), the temperature gradient in the vapor has a significant component parallel to the surface, ∇T_{\parallel} , which is largest close to the upper corner.

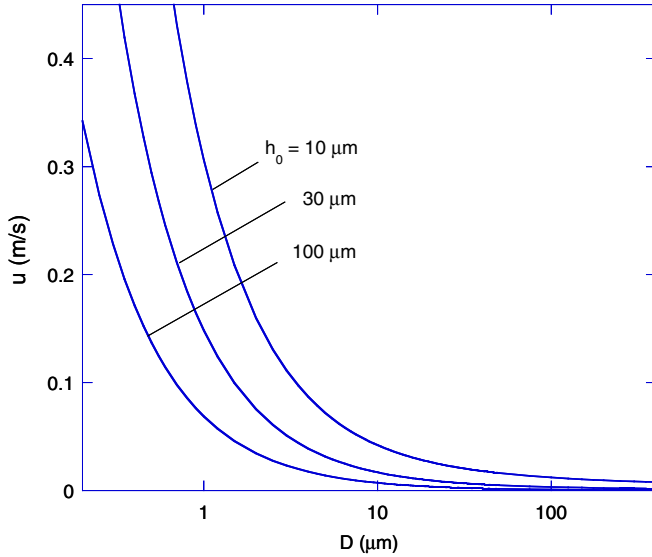


FIG. 3 (color online). Drift velocity u as a function of the ratchet parameter D for $h_0 = 10, 30, 100 \mu\text{m}$. The curves are calculated from Eq. (7) with $\nu = 60 \text{ mm}^2/\text{s}$, $\ell = 130 \text{ nm}$, $\pi/\alpha = 0.63$, $L/D = 4$, and $\Delta T/T = 1/2$.

where $\hat{\xi} = -\frac{\pi^2}{\alpha^2} \cos\frac{\alpha}{2}$. Its essential feature is the weak singularity at the ratchet summit, very similar to the electric field close to a charged cusp. The molecular mean-free path ℓ provides a physical cutoff for the divergence.

Now the drift velocity is evaluated in terms of Eq. (4), resulting in [24]

$$u = \xi \frac{\Delta T}{T_S} \frac{\nu}{h_0} \left(\frac{\ell}{h_0}\right)^{\pi/\alpha} \frac{D/L}{\ln(1 + D/h_0)}, \quad (7)$$

with the numerical prefactor $\xi \approx 0.6$ [24]. This expression confirms the estimate (5) yet shows additional dependencies on the ratchet parameters. Figure 3 reveals a striking variation of u with D : the smaller the ratchet profile, the larger the droplet velocity. This at-first-sight counterintuitive result is confirmed by the experiment of Ok *et al.* [3]:

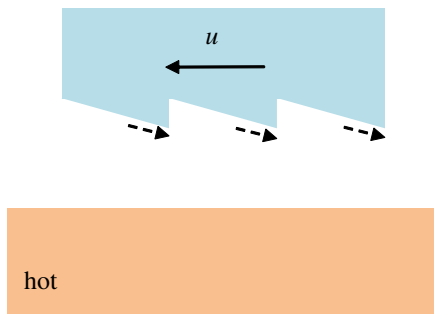


FIG. 4 (color online). Thermal creep below a piece of dry ice (solid CO_2) floating above a hot metal surface due to sublimation [2]. Because of the ratchet profile printed at its lower side, there is a parallel temperature gradient ∇T_{\parallel} as indicated by dashed arrows; the rectified thermal-creep flow propels the disk to the left. The mean velocity of the vapor in the cleft is zero.

Their data at intermediate temperatures are well fitted by a logarithmic variation, similar to (7). Though this comparison does not account for the implicit dependence of h_0 on D , one may safely conclude on a qualitative agreement of (7) with the data. Note that for a ratchet driven by nonlinear hydrodynamics, one expects the opposite behavior, i.e., a smaller velocity for small D . Indeed, from the left-hand panel of Fig. 1 it is clear that for $D \ll h_0$ the gas velocity in the ratchet layer is small and the nonlinear term $(\mathbf{v} \cdot \nabla)\mathbf{v}$ of the Navier-Stokes equation is insignificant.

So far we have considered liquid droplets on a ratchet. The same mechanism holds for a piece of dry ice (solid CO_2) above its sublimation temperature floating above a hot metal surface; when graving a sawtooth profile at its lower face, Lagubeau *et al.* observed motion similar to the droplets discussed so far. Since the creep velocity occurs at the bottom of the dry ice, the mean velocity of the vapor in the cleft is zero, as illustrated in Fig. 4.

Lagubeau *et al.* measured the force F required to immobilize a droplet floating on a ratchet [2]. In the range $R = 1\text{--}7 \text{ mm}$, they found values from 3 to 30 μN , and a power law $F \propto R^\beta$, with an exponent $\beta \approx 1.5$. In the present work, this force is given by the integral of the shear stress over the contact area, $F = \pi R^2 \eta \langle v_C/h \rangle$. With the above expression for the thermal-creep velocity one finds

$$F = \pi \xi \frac{\eta R^2 D}{L^2} \nu \frac{\Delta T}{T} \frac{\ell^{\pi/\alpha}}{h_0^{1+\pi/\alpha}}. \quad (8)$$

With the relation $h_0 \propto \sqrt{R}$ [2], the force varies with the droplet size as $\beta = \frac{3}{2} - \frac{\pi}{2\alpha} \approx 1.2$; within the experimental uncertainties, this compares favorably with the measured value.

The thermal-creep mechanism described here is not limited to the motion of Leidenfrost droplets. As a straightforward application we discuss the gas pump shown in Fig. 5, which consists of two nanostructured plates at

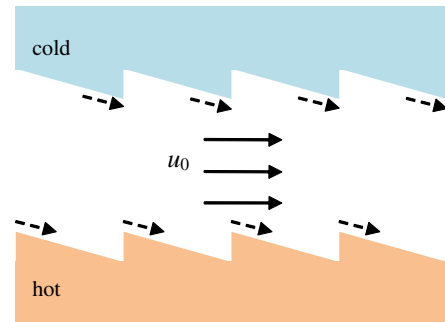


FIG. 5 (color online). Gas pump driven by thermal creep. The thermal gradient across the channel is given by their temperature difference ΔT and spacing h_0 . At the ratchet corners, there is a parallel component ∇T_{\parallel} , as indicated by dashed arrows. Thermal creep gives rise to a uniform gas flow at velocity u_0 , as given in Eq. (4). Note the opposite orientation of the saw teeth on the cold and hot side.

temperatures differing by ΔT . Both solid interfaces show thermal creep and thus impose a uniform gas flow across the cleft. For a sufficiently small ratchet profile, $D < h_0$, Eq. (7) simplifies to

$$u_0 = \xi \frac{\nu}{L} \frac{\Delta T}{T} \left(\frac{\ell}{h_0} \right)^{\pi/\alpha}. \quad (9)$$

This velocity may attain several meters per second. It turns out to be instructive to compare this ratchet with a Knudsen pump [25]; in the present case, the thermal gradient is perpendicular to the gas flow, whereas both are parallel in the latter. Moreover, a Knudsen pump requires the system size to be comparable to or smaller than the mean-free path, and thus is restricted to very dilute gases. Although the ratchet mechanism does depend on the ratio ℓ/h_0 , it works for films that are a hundred times thicker than the mean-free path.

-
- [1] H. Linke *et al.*, *Phys. Rev. Lett.* **96**, 154502 (2006).
 [2] G. Lagubeau, M. Le Merrer, C. Clanet, and D. Quéré, *Nature Phys.* **7**, 395 (2011).
 [3] J. T. Ok, E. Lopez-Oña, D. E. Nikitopoulos, H. Wong, and S. Park, *Microfluid. Nanofluid.* **10**, 1045 (2010).
 [4] F. Brochard, *Langmuir* **5**, 432 (1989).
 [5] A. M. Cazabat, F. Heslot, S. M. Troian, and P. Carles, *Nature (London)* **346**, 824 (1990).
 [6] P.-G. de Gennes, F. Brochard-Wyart, and D. Quéré, *Capillarity and Wetting Phenomena* (Springer, New York, 2003).
 [7] M. K. Chaudhury and G. M. Whitesides, *Science* **256**, 1539 (1992).
 [8] K. Ichimura, S.-K. Oh, and M. Nakagawa, *Science* **288**, 1624 (2000).
 [9] D. Quéré and A. Ajdari, *Nature Mater.* **5**, 429 (2006).
 [10] O. Reynolds, *Phil. Trans. R. Soc. London* **170**, 727 (1879).
 [11] J. C. Maxwell, *Phil. Trans. R. Soc. London* **170**, 231 (1879).
 [12] B. V. Derjaguin and Yu. Yalamov, *J. Colloid Sci.* **20**, 555 (1965).
 [13] L. Talbot, R. K. Cheng, R. W. Schefer, and D. R. Willis, *J. Fluid Mech.* **101**, 737 (1980).
 [14] S. E. Vargo, E. P. Muntz, G. R. Shiflett, and W. C. Tang, *J. Vac. Sci. Technol. A* **17**, 2308 (1999).
 [15] A. Passian, R. J. Warmack, T. L. Ferrell, and T. Thundat, *Phys. Rev. Lett.* **90**, 124503 (2003).
 [16] S. Colin, *Microfluid. Nanofluid.* **1**, 268 (2004).
 [17] B. Gotsmann and U. Dürig, *Appl. Phys. Lett.* **87**, 194102 (2005).
 [18] S. McNamara and Y. B. Gianchandani, *J. Microelectromech. Syst.* **14**, 741 (2005).
 [19] N. K. Gupta and Y. B. Gianchandani, *Appl. Phys. Lett.* **93**, 193511 (2008).
 [20] R. Piazza, *Soft Matter* **4**, 1740 (2008).
 [21] A. Würger, *Rep. Prog. Phys.* **73**, 126601 (2010).
 [22] A.-L. Biance, C. Clanet, and D. Quéré, *Phys. Fluids* **15**, 1632 (2003).
 [23] T. A. Driscoll and L. N. Trefethen, *Schwarz-Christoffel Mapping* (Cambridge University Press, Cambridge, England, 2002).
 [24] See Supplemental Material at <http://link.aps.org/supplemental/10.1103/PhysRevLett.107.164502> for temperature field and creep velocity close to the ratchet corner.
 [25] M. Knudsen, *Ann. Phys. (Leipzig)* **336**, 205 (1909); **338**, 1435 (1910).