

Cavity-Free Scheme for Nondestructive Detection of a Single Optical Photon

Keyu Xia (夏可宇)^{1,*}, Mattias Johansson,¹ Peter L. Knight,² and Jason Twamley¹

¹Centre for Engineered Quantum Systems, Department of Physics and Astronomy, Macquarie University, NSW 2109, Australia

²Department of Physics, Blackett Laboratory, Imperial College, London SW72AZ, United Kingdom

(Received 15 June 2015; revised manuscript received 23 August 2015; published 13 January 2016)

Detecting a single photon without absorbing it is a long-standing challenge in quantum optics. All experiments demonstrating the nondestructive detection of a photon make use of a high quality cavity. We present a cavity-free scheme for nondestructive single-photon detection. By pumping a nonlinear medium we implement an interfield Rabi oscillation which leads to a $\sim\pi$ phase shift on a weak probe coherent laser field in the presence of a single signal photon without destroying the signal photon. Our cavity-free scheme operates with a fast intrinsic time scale in comparison with similar cavity-based schemes. We implement a full real-space multimode numerical analysis of the interacting photonic modes and confirm the validity of our nondestructive scheme in the multimode case.

DOI: 10.1103/PhysRevLett.116.023601

Unlike “demolition,” detection quantum nondemolition (QND) or “nondestructive” photon detection ideally avoids any absorption of the photons during the measurement. It is essential for applications in quantum information processing.

Because of the ultrastrong coupling between a high quality microwave (mw) cavity and a qubit, nondestructive single-photon detection has been demonstrated in mw cavity quantum electrodynamics (QED) [1–7]. A breakthrough result demonstrated a π phase shift of an atom resonantly coupled to a high- Q mw cavity after a full-cycle Rabi oscillation (RO) [4]. However, the experimental verification of the nondestructive detection of an optical photon in an optical cavity has only been reported very recently [8]. So far, all experimental proposals, except for the microwave proposal by Sathyamoorthy *et al.* [9] using a chain of superconducting transmons strongly coupled to a propagating mw photon, detect a mw or optical single photon by exploiting sophisticated cavity-QED designs.

Nondestructive detection of a traveling single photon is a key element in quantum information processing but is even more challenging compared to the detection of a single photon in a cavity. Although QND measurement of photons using cross-phase modulation (XPM) in a Kerr nonlinear medium has been proposed for decades [10,11], it has been widely doubted [12–14] when a continuous-time multimode model [13], or a finite response time [14], is considered and has never been demonstrated experimentally at the single-photon level. In general, in all proposed XPM based QND schemes the probe field’s phase shift induced by a single signal photon is either too small to be detected or suffers from excess noise. Such XPM schemes use an “Ising”-type interaction, $\hat{a}_s^\dagger \hat{a}_s \hat{a}_p^\dagger \hat{a}_p$, between the signal and probe modes: \hat{a}_s and \hat{a}_p . However our scheme exploits a “Rabi”-like oscillation between the modes when we consider a tunable three-mode interaction $\hat{a}_a \hat{a}_p^\dagger \hat{a}_s^\dagger + \hat{a}_a^\dagger \hat{a}_p \hat{a}_s$. We find this

Rabi-like dynamics overcomes virtually all of the difficulties present in XPM-based QND schemes. Below we analyze our concept using two types of descriptions: The first description uses a single-mode model that is able to include the effects of higher Fock states but neglects the spatiotemporal dynamics of the propagating light fields. It also gives deeper insights than the second description. In the latter we carefully model the spatial propagation of the light fields but restricted to single photon wave packets. Both descriptions confirm the operation of the QND protocol under different settings.

We begin by discussing the main concept for the nondestructive detection of a single photon by describing the setup as depicted in Fig. 1(a). As in [15], we strongly pump a nonlinear optical medium to create a standard three-wave-mixing Hamiltonian. In this setup, the nonlinear coupling among the auxiliary mode \hat{a}_a , the signal field \hat{a}_s and the probe mode \hat{a}_p is enhanced and

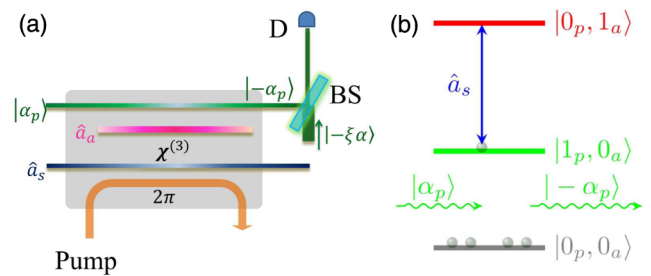


FIG. 1. Schematic for detection of a single traveling photon. (a) Configuration for nondestructive detection of a single traveling photon in a nonlinear medium. A weak probe coherent field $|\alpha_p\rangle$ (green line) interacts with the signal and auxiliary modes \hat{a}_s (blue line) and \hat{a}_a (magenta line) in a third-order nonlinear ($\chi^{(3)}$) medium. The probe field, after a full Rabi oscillation (interaction of 2π), is displaced via a highly reflective beam splitter and then is detected. (b) Level diagram describing the interaction between the signal, auxiliary, and probe photons.

dynamically controlled by the strong pump (control) field E_c with frequency ω_c and propagation constant k_p . The modes \hat{a}_a , \hat{a}_s , and \hat{a}_p are assumed to have the central frequencies ω_a , ω_s , and ω_p , propagation constants k_a , k_s , and k_p , and durations τ_a , τ_s , and τ_p , respectively. We assume that the three modes suffer zero dispersion over their individual bandwidths and propagate with constant group velocities. This is reasonable if the duration of the signal and probe fields are long enough to span a narrow bandwidth. By properly choosing the length L of the nonlinear medium and controlling the intensity of the pumping, we can enable an accumulated interaction of 2π among the three fields \hat{a}_a , \hat{a}_s , and \hat{a}_p as they propagate through length L of the medium. The interaction Hamiltonian describing the three-wave mixing among the fields in the medium (along the z direction) \hat{a}_a , \hat{a}_s , and \hat{a}_p takes the form ($\hbar = 1$)

$$\hat{H}_I = \frac{g(E_c)}{2} \hat{a}_a \hat{a}_p^\dagger \hat{a}_s^\dagger + \frac{g^*(E_c)}{2} \hat{a}_a^\dagger \hat{a}_p \hat{a}_s, \quad (1)$$

where $g(E_c)$ indicates the nonlinear coupling strength that can be tuned by the intensity of the pump field E_c .

Next we explain how to induce a substantial phase shift in the weak probe field to distinguish between the vacuum and single-photon states of the signal field; see Fig. 1(b). We arrange that the auxiliary field is initially in the vacuum state $|0\rangle_a$. The signal field can be either the vacuum state $|0\rangle_s$ or a single-photon state $|1\rangle_s$. The weak probe coherent field $|\alpha_p\rangle$ copropagates with the signal mode and the pumping field along the z direction. We assume that $\alpha_p \ll 1$ such that $|\alpha_p\rangle \approx |0\rangle_p + \alpha_p |1\rangle_p$. We schematically depict the interaction between the photons by the level diagram shown in Fig. 1. For a weak probe field $\alpha_p \ll 1$, the joint quantum state $|0_p, 0_a\rangle$ is mostly populated, while the occupation of the state $|1_p, 0_a\rangle$ is approximately $|\alpha_p|^2 \exp(-|\alpha_p|^2/2)$. The signal field drives the transition $|1_p, 0_a\rangle \leftrightarrow |0_p, 1_a\rangle$. To provide a simple but transparent picture for our idea we consider the ideal case of $\omega_c + \omega_a = \omega_p + \omega_s$ and $k_c + k_a = k_p + k_s$. If $g(E_p)L = 2\pi$ and a single photon in the signal field, i.e., $\hat{a}_s^\dagger |\emptyset\rangle = |1\rangle_s$ (where $|\emptyset\rangle$ is the vacuum), the signal field will drive the transition $|1_p, 0_a\rangle \rightarrow |0_p, 1_a\rangle$ and then bring back the occupation to $|1_p, 0_a\rangle$. In this case, the state $|1_p, 0_a\rangle$ suffers a π phase shift and therefore the probe field becomes $|\Psi\rangle_t = |0_p\rangle - \alpha_p |1\rangle \approx |-\alpha_p\rangle$. For a vacuum signal field $|0_s\rangle$, the probe field has no phase shift after propagating through the medium. As a result, the transmitted field is $|\Psi\rangle_t = |\alpha_p\rangle$. In our numerical simulation, the transitions $|(n+1)_p, 0_a\rangle \rightarrow |n_p, 1_a\rangle$ involving higher Fock states with $n_p > 0$ are also taken into account by truncating the probe field at a large Fock state.

To detect the change in the probe field, we displace the probe field after it has propagated and transmitted through the nonlinear medium by a coherent field $|-\alpha_p\rangle$. Then the

density matrix of the detected field is related to that of the transmitted field by $\rho_D(-\alpha_p) = D(-\alpha_p)\rho(L)D(\alpha_p)$ [16], where $D(\alpha_p)$ is the displacement operator. To do so, we inject a large coherent field $|\xi\rangle$ ($\xi \gg 1$), into a highly reflective beam splitter $[(1-\eta):\eta]$ with a reflectivity of $\eta > 0.99$, together with the probe field, so that the transmission is $|-\alpha_p\rangle$ [17]. In doing so, the detector will measure a coherent field $|\Psi\rangle_D = |-\alpha_p\rangle$ if a single photon is present, but no photon ($|\Psi\rangle_D = |0_p\rangle$) is detected if no signal photon is input into the system.

We next evaluate the performance of our single-photon detection. We first treat the propagation of the optical fields via a single mode approach governed by a quantum Langevin equation by replacing the time t with the position z

$$\partial\rho/\partial z = -i[\hat{H}_I, \rho] + \mathcal{L}\rho, \quad (2)$$

where ρ is the density matrix of the system at the position z , and $\mathcal{L}\rho$ takes into account the possible decoherence, $\mathcal{L}\rho = \sum_{j=a,p,s} (\gamma_j/2)(2\hat{a}_j\rho\hat{a}_j^\dagger - \hat{a}_j^\dagger\hat{a}_j\rho - \rho\hat{a}_j^\dagger\hat{a}_j)$ where γ_j is the loss per meter of the j th mode. Numerically solving the quantum Langevin equation, one can calculate the transmitted state of the probe field and the detected state. As a test, the Langevin equation reproduces all the results shown in Fig. 2(a) of the work [15]. We will implement a more thorough multimode propagation analysis later on but for now we take $\gamma_a = \gamma_p = \gamma_s = 10^{-3} \text{ rad m}^{-1}$.

We consider the click at the detector as evidence of a single photon in the signal mode. If no click is observed, then we consider no photon to be present in the signal mode. We assume perfect quantum efficiency of the detector. Thus the vacuum state of the signal mode yields no click on the detector with 100% probability. When a single photon is injected into the system, the state presented to the detector is $|\Psi\rangle_D = |-\alpha_p\rangle$. This state can generate a click with a certain probability but the small vacuum element in $|\Psi\rangle_D$ can lead to a detection failure of the signal photon with a probability P_{err} . Therefore, taking

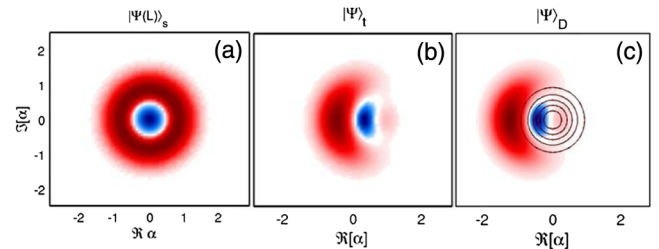


FIG. 2. Wigner functions of the transmitted and detected states for a probe field with $|\alpha_p|^2 = 0.6$. (a) Transmitted signal state $|\Psi\rangle_s$ after interacting for the length of the media; (b) transmitted probe field $|\Psi\rangle_t$ after interacting for the length of the media; (c) detected state $|\Psi\rangle_D$ of probe field presented to detector. The concentric circles show the Wigner function contours of the detection field in the case of an input signal vacuum state.

$\alpha_p \in \Re$, this error probability is [18] given by $P_{\text{err}}(\alpha_p) = \text{Tr}[|0_p\rangle\langle 0_p|D(-\alpha_p)\rho(L)D(\alpha_p)] \approx e^{-4|\alpha_p|^2}$. We note that this error decreases exponentially with α_p but we will see below that the nondestructiveness of the protocol also degrades with increasing α_p . If we explore an N -cascade detection configuration [9,15], and consider a single click on any detector as an indicator for a single photon in the signal mode, then the error probability of failing to detect the signal photon decreases as $\sim P_{\text{err}}^N$. This error decreases rapidly to vanishing small values as N increases.

Another parameter indicating the “nondestructive” performance of the detection is the fidelity of the signal single-photon state $\mathcal{F}(\alpha_p, L) = \text{Tr}[\rho(\alpha_p, L)|1_s\rangle\langle 1_s|]$, after detection. The value of \mathcal{F} can be evaluated numerically and for low values of α_p we find it close to unity.

Next we estimate the performance of our system by numerically simulating the *mode* master equation (2) and truncating the Hilbert subspace of probe field up to $|14\rangle$. For a vacuum signal state $|0_s\rangle$, the detected field after the beam splitter is trivial, being the initial probe vacuum field $|0_p\rangle$. Thus we are primarily interested the detection field $|\Psi\rangle_D$ in the case of a single-photon signal input $|1_s\rangle$. First, for a certain probe field of $|\alpha_p|^2 = 0.6$, and a single-photon signal field $|1_s\rangle$, we investigate to what extent the phase of the transmitted probe field can be shifted while the signal field remains unchanged. Figure 2 shows the Wigner functions of the transmitted and detected field. In Fig. 2(a), the Wigner function indicates the transmitted signal field at $z = 2\pi$ is almost a single photon state $|1_s\rangle$. The fidelity is evaluated to be $\mathcal{F} \approx 0.9$. The transmitted probe field $|\Psi\rangle_t$ has a complicated Wigner function which includes a region with a large negative value. It means that $|\Psi\rangle_t$ is a quantum field at $z = 2\pi$ because the initial probe field includes considerable occupation in higher Fock states $|n_p\rangle$ with $n_p > 1$. As a result, the squared overlap of the transmitted probe field with the idea one, $|\langle -\alpha_p|\Psi\rangle_t|^2$, is about 0.73; see Fig. 2(b). After displacing by $|\alpha_p\rangle$ with the beam splitter, the Wigner function [Fig. 2(c)] moves to the left by α_p with the result that the detected field $|\Psi\rangle_D$ can be well distinguished from a vacuum detected field of $|0_p\rangle$ ($|\langle 0_p|\Psi\rangle_D|^2 \approx 0.09$ yielding a Helstrom bound of 0.02 [19,20]).

During the time evolution of three modes, the occupation of the probe field displays Rabi-like oscillation as the fields propagate through the medium. The occupation of the probe field first transfers to the auxiliary mode and then returns to the probe field at $gz = 2\pi$. The fidelity of the signal mode also oscillates with the propagation distance z . This process repeats every $gz = 2\pi$. It is found that, given a small $|\alpha_p|^2$, the phase of the probe field is shifted by π at $gz = 2\pi$, but the loss of the signal mode is negligible. For example, when $|\alpha_p|^2 = 0.6$, the probe field acquires a phase shift of $\sim \pi$ at $gz = 2\pi$, while an occupation of 0.894 in the signal mode yields a high fidelity for nondemolition $\mathcal{F} \approx 0.9$. As $|\alpha_p|^2$ increases the fidelity of the signal mode

decreases gradually. If $|\alpha_p|^2$ increases to 0.8, the non-demolition fidelity \mathcal{F} drops to 0.84. The signal mode is more greatly modified by a stronger probe field because the more populated higher Fock states with $n_p > 1$ interact dispersively with the signal mode [21].

A “good” single-photon detection requires a high fidelity \mathcal{F} of the signal mode and a small detection error P_{err} . Reducing the mean photon number of the probe field can increase the fidelity of the transmitted signal mode but also leads to an increase in the detection error because it provides less signal to the detector. For one measurement, the error probability $P_{\text{err}} \approx e^{-4|\alpha_p|^2}$ decreases exponentially as $|\alpha_p|^2$ increases. From Fig. 3, this analytic form (blue line) is in good agreement with the numerical results (circles) for small $|\alpha_p|^2$. The numerical value of P_{err} reaches its minimum 0.09 at $|\alpha_p|^2 = 0.6$ and then increases slowly as $|\alpha_p|^2$ increases. On the other hand, the fidelity \mathcal{F} decreases as well. When $|\alpha_p|^2 = 0.6$, $\mathcal{F} = 0.9$. An efficient QND detection requires $\mathcal{F}/P_{\text{err}} \gg 1$. Thus, a probe field of $|\alpha_p|^2 \sim 0.6$ is optimal and yields $\mathcal{F}/P_{\text{err}} = 10$. An N -cascade configuration of the detection unit can reduce the error possibility to $\sim P_{\text{err}}^N$ and relax the requirement $\mathcal{F}^N/P_{\text{err}}^N \gg 1$ [22]. The green line in Fig. 3 provides an estimate of the N required to achieve $P_{\text{err}}^N < 5\%$. Even for a very weak probe field of $|\alpha_p|^2 = 0.2$, four cascaded detection units can achieve an error probability of $\sim 3.9\%$ and $\mathcal{F}^4/P_{\text{err}}^4 > 23.75$ [23].

Above we modeled our scheme using single modes. This approximate description neglects any spatiotemporal dynamics of photons. Next we go far beyond this approximation by numerically simulating the interaction of continuous-time multimode quantum wave packets propagating in real space. For our purpose of single-photon QND detection, we only need to address the fidelity and phase

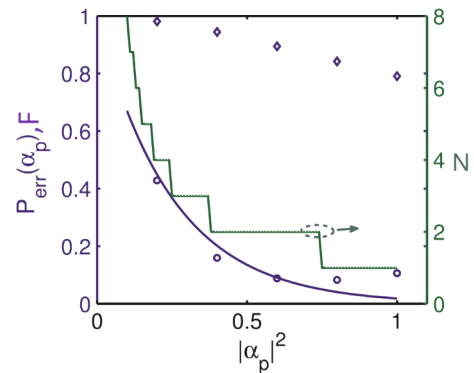


FIG. 3. Detection error P_{err} , and fidelity \mathcal{F} , as a function of the probe field. Blue line indicates the analytic estimation. Circles show the numerical data for different probe fields, while the diamond data (with regard to left vertical axis) show the fidelity of the transmitted signal mode. The green line (right vertical axis) gives the number N of cascaded detection units to achieve an overall detection error $P_{\text{err}}^N < 5\%$.

shift of a photon-pair input state $|1_p, 1_s\rangle$ after propagating a certain distance. During the propagation of the probe and signal fields the auxiliary field can be excited. To simulate the interaction we define an associated wave function $\phi_{ps}(t; z_p, z_s)$ for the state $|1_p, 1_s\rangle$, and the wave function $\phi_a(t; z_a)$ for the auxiliary field state $|1_a\rangle$. These wave functions imply that the photons $|1_p\rangle$ and $|1_s\rangle$ ($|1_a\rangle$) appear(s) at z_p and z_s (z_a) at time t with probability of $|\phi_{ps}(t; z_p, z_s)|^2$ ($|\phi_a(t; z_a)|^2$). The state of the fields can be described by a general wave function [24] $|\phi(t; z_a, z_p, z_s)\rangle = \int dz_a \phi_a(t; z_a) \hat{a}_a^\dagger |\emptyset\rangle + \iint dz_p dz_s \phi_{ps}(t; z_p, z_s) \hat{a}_p^\dagger \hat{a}_s^\dagger |\emptyset\rangle$, where $|\emptyset\rangle$ is the vacuum state. We apply a Gaussian input $\phi_{ps}(t; z_p, z_s) = (1/\sqrt{\pi\tau_p\tau_s}) e^{-(z_p - z_{p,0})^2/2\tau_p^2} e^{-(z_s - z_{s,0})^2/2\tau_s^2}$, where $z_{p,0}$ and $z_{s,0}$ are the group delays of the probe and signal wave functions, respectively. For simplicity, we assume $\tau_p = \tau_s = \tau$. Assuming this product input yields no quantum (or classical) correlations in the input we have initially, $\int \int dz_p dz_s |\phi_{ps}(0; z_p, z_s)|^2 = 1$ and $\int dz_a |\phi_a(0; z_a)|^2 = 0$. The evolution of the photonic wave functions is governed by the partial differential equations (PDEs) [24]

$$\begin{aligned} \frac{\partial \phi_{ps}}{\partial t} &= -v_p \frac{\partial \phi_{ps}}{\partial z_p} - v_s \frac{\partial \phi_{ps}}{\partial z_s} - \frac{ig_0}{2} \int_0^L f_g(z_a, z_p, z_s) \phi_a dz_a, \\ \frac{\partial \phi_a}{\partial t} &= -v_a \frac{\partial \phi_a}{\partial z_a} - \frac{ig_0}{2} \int_0^L \int_0^L f_g(z_a, z_p, z_s) \phi_{ps} dz_p dz_s, \end{aligned}$$

where we assume perfect phase and energy matching $\Delta k = (k_c + k_a - k_p - k_s) = 0$ and $\Delta_a = (\omega_c + \omega_a - \omega_p - \omega_s) = 0$, respectively. The nonlinear medium is assumed to possess a spatial nonlocal response distribution [25] $f_g(z_a, z_p, z_s) = (1/\sqrt{\pi\sigma^3}) e^{-[(z_a - z_p)^2/2\sigma^2]} e^{-[(z_a - z_s)^2/2\sigma^2]}$, where σ indicates the finite interaction length. The prefactor of this spatial response function is not important for experimental implementation because the coupling strength can be tuned via the pump laser power. The photon pulses are long enough to assume that the group velocity of each mode is constant in time (we assume $v_a = v_p = 1$). The fidelity of the photon pair state $|1_p, 1_s\rangle$ is evaluated as $\tilde{\mathcal{F}} = \frac{1}{2} |1 - \int \int dz_p dz_s \phi_{ps} \text{in}^*(t_e; z_p, z_s; z_{p,e}, z_{s,e}) \phi_{ps}(t_e; z_p, z_s; z_{p,e}, z_{s,e})|$, where $\phi_{\text{in}}^*(t_e; z_p, z_s; z_{p,e}, z_{s,e})$ means the input wave packets $\phi_{ps}(t=0)$ freely propagating to the output position $z_{p,e}$ and $z_{s,e}$. With this definition we expect the fidelity to be $\tilde{\mathcal{F}} = 0$ when no phase shift is present but $\tilde{\mathcal{F}} = 1$ for a π phase shift. Throughout our simulation, we set $\sigma = 0.2$ and the duration $\tau = 0.6$ in z .

We numerically simulate the time evolution of the associated wave function ϕ_{ps} at different positions in real space using the xmds package to solve the PDEs [26]. Here the probe and signal wave functions initially have no correlation yielding a form for ϕ_{ps} of a 2D symmetric Gaussian. In Fig. 4(a), the probe and signal wave functions have the same delay and are assumed to copropagate at same group velocity, $v_p = v_s = 1$. We find that only the

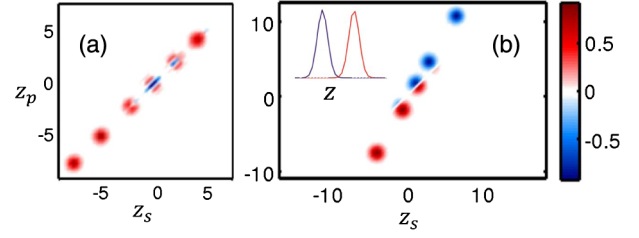


FIG. 4. Evolution of the wave function ϕ_{ps} for (a) the same propagating speeds $v_p = v_s = 1$ and delay, and (b) different speeds $v_p > v_s$ ($v_p = 1$ but $v_s = 0.6$) and different delays, $z_{s,0} = -4$ and $z_{p,0} = -7.6$. Inset in (b) shows the positions of input probe (blue line) and signal (red line) wave functions corresponding to the first red spot.

diagonal region of the wave function ϕ_{ps} has a π phase shift because the nonlinear interaction occurs only when the probe and signal photons overlap in space, $|z_p - z_s| < \sigma$. In Fig. 4(b), the signal pulse enters the medium first and is followed by the probe pulse (see inset plot). The probe mode propagates faster than the signal mode. This configuration has been used for XPM to induce a large phase shift using an Ising type interaction but the resulting fidelity was poor [27]. In our case, during the propagation the probe field scans over the whole signal pulse and subsequently the two fields interact completely with each other. It is found that the wave function starts to invert when the leading edge of the probe pulse meets the tail of the signal pulse. As a result, a π phase shift can be induced after the probe pulse passes through the entire signal pulse and we find that the fidelity is very high, with $\mathcal{F} \approx 1$. By comparing two models it can be seen that when the probe field has at most one photon, a unit fidelity for the transmitted signal mode is achieved. If the probe contains higher Fock states then we find that interactions with these higher states prevents us from achieving perfect nondemolition of the signal mode.

For a physical implementation of nondegenerate FWM we consider Rubidium atomic vapor contained within hollow-core photonic crystal fiber (PCF) [28,29]. This atomic system with number density of $N_a \sim 10^{13}$ atoms/cm³ can provide a giant nonlinear refractive index of $n_2 \sim 10^{-6}$ cm² W⁻¹ corresponding to a nonlinear coefficient $\gamma \sim 10^8$ W⁻¹ m⁻¹, nine orders stronger than that of silica ($\gamma \sim 0.1$ W⁻¹ m⁻¹ or $n_2 \sim 10^{-16}$ cm² W⁻¹ [15]) [30,31]. In detail, we consider the diamond configuration in ⁸⁵Rb: the 780 nm pump laser drives the transition $5S_{1/2} \leftrightarrow 5P_{3/2}$ and controls the coupling rate of the effective three-wave mixing; the auxiliary mode has wavelength 1.362 μ m and drives $5P_{3/2} \leftrightarrow 6S_{1/2}$; the signal and probe fields have wavelengths 795 nm and 1.324 μ m, and drive transitions $5S_{1/2} \leftrightarrow 5P_{1/2}$ and $5P_{1/2} \leftrightarrow 6S_{1/2}$, respectively. Another laser field with wavelength of 1.48 μ m couples to the transition $5P_{1/2} \leftrightarrow 4d_{3/2}$. It is used to tune (slow down 20%–80%) the group velocity of the signal pulse. Given a 0.1 W pump laser and $N_a = 2 \times 10^{11}$ atoms/cm³, a PCF with length of 1 m and hollow core diameter of $D = 6$ μ m,

we estimate a full Rabi oscillation, $g(E_c)L = 2\pi$, can be achieved for 1 ns signal and probe pulses. These 1 ns pulses are long enough to neglect the dispersion within PCF [32], and estimate the mode volume of the pulses using $V \sim A_{\text{eff}}c\tau_p$ for simplicity [33].

In conclusion, many researchers have previously unsuccessfully tried to apply cross-Kerr-based schemes using the “Ising”-type interaction for QND single-photon detection in the multimode picture [12–14]. Our scheme can circumvent such complications using a Rabi-like oscillation in a cavity-free scheme to detect a single optical photon without destroying it. In our setup we have induced a π phase shift in a weak probe field by a traveling single photon in a nonlinear medium with this single photon remaining largely unchanged.

This research was supported in part by the ARC Centre of Excellence in Engineered Quantum Systems (EQuS), Project No. CE110001013.

*keyu.xia@mq.edu.au

- [1] M. Brune, J. Bernu, C. Guerlin, S. Deléglise, C. Sayrin, S. Gleyzes, S. Kuhr, I. Dotsenko, J. M. Raimond, and S. Haroche, *Phys. Rev. Lett.* **101**, 240402 (2008).
- [2] J. Bernu, S. Deléglise, C. Sayrin, S. Kuhr, I. Dotsenko, M. Brune, J. M. Raimond, and S. Haroche, *Phys. Rev. Lett.* **101**, 180402 (2008).
- [3] C. Guerlin, J. Bernu, S. Deléglise, C. Sayrin, S. Gleyzes, S. Kuhr, M. Brune, J. Raimond, and S. Haroche, *Nature (London)* **448**, 889 (2007).
- [4] G. Nogues, A. Rauschenbeutel, S. Osnaghi, M. Brune, J. M. Raimond, and S. Haroche, *Nature (London)* **400**, 239 (1999).
- [5] B. R. Johnson, M. D. Reed, A. A. Houck, D. I. Schuster, L. S. Bishop, E. Ginossar, J. M. Gambetta, L. DiCarlo, L. Frunzio, S. M. Girvin, and R. J. Schoelkopf, *Nat. Phys.* **6**, 663 (2010).
- [6] M. Brune, S. Haroche, V. Lefevre, J. M. Raimond, and N. Zagury, *Phys. Rev. Lett.* **65**, 976 (1990).
- [7] D. I. Schuster, A. A. Houck, J. A. Schreier, A. Wallraff, J. M. Gambetta, A. Blais, L. Frunzio, J. Majer, B. Johnson, M. H. Devoret, S. M. Girvin, and R. J. Schoelkopf, *Nature (London)* **445**, 515 (2007).
- [8] A. Reiserer, S. Ritter, and G. Rempe, *Science* **342**, 1349 (2013).
- [9] S. R. Sathyamoorthy, L. Tornberg, A. F. Kockum, B. Q. Baragiola, J. Combes, C. M. Wilson, T. M. Stace, and G. Johansson, *Phys. Rev. Lett.* **112**, 093601 (2014).
- [10] P. Grangier, J. A. Levenson, and J. Poizat, *Nature (London)* **396**, 537 (1998).
- [11] M. D. Lukin and A. Imamoglu, *Phys. Rev. Lett.* **84**, 1419 (2000).
- [12] B. Fan, A. F. Kockum, J. Combes, G. Johansson, I.-c. Hoi, C. M. Wilson, P. Delsing, G. J. Milburn, and T. M. Stace, *Phys. Rev. Lett.* **110**, 053601 (2013).
- [13] J. Gea-Banacloche, *Phys. Rev. A* **81**, 043823 (2010).
- [14] J. H. Shapiro and M. Razavi, *New J. Phys.* **9**, 16 (2007); J. H. Shapiro, *Phys. Rev. A* **73**, 062305 (2006); J. Dove, C. Chudzicki, and J. H. Shapiro, *Phys. Rev. A* **90**, 062314 (2014).
- [15] N. K. Langford, S. Ramelow, R. Prevedel, W. J. Munro, G. J. Milburn, and A. Zeilinger, *Nature (London)* **478**, 360 (2011).
- [16] P. Bertet, A. Auffeves, P. Maioli, S. Osnaghi, T. Meunier, M. Brune, J. M. Raimond, and S. Haroche, *Phys. Rev. Lett.* **89**, 200402 (2002).
- [17] K. Banaszek and K. Wódkiewicz, *Phys. Rev. Lett.* **76**, 4344 (1996).
- [18] S. M. Barnett and S. Croke, *Adv. Opt. Photonics* **1**, 238 (2009).
- [19] J. Volz, R. Gehr, G. Duhois, J. Estève, and J. Reichel, *Nature (London)* **475**, 210 (2011).
- [20] C. W. Helstrom, *Quantum Detection and Estimation Theory*, Mathematics in Science and Engineering (Academic, New York, 1976), Vol. 123.
- [21] M. Brune, F. Schmidt-Kaler, A. Maali, J. Dreyer, E. Hagley, J. M. Raimond, and S. Haroche, *Phys. Rev. Lett.* **76**, 1800 (1996).
- [22] To numerically evaluate the performance of an N -cascaded configuration, we use the transmitted signal mode of previous detection, $\rho_{\text{out}}^{(j)}$, as the input of current detection, $\rho_{\text{in}}^{(j+1)}$. Notations $\mathcal{F}^{(j)}$ and $P_{\text{err}}^{(N)}$ are for the fidelity and error probability in the j th detection. Then the final fidelity and overall error probability in a, N -cascaded configuration are given by $\mathcal{F}^{(N)} \approx \mathcal{F}^N$ and $P_{\text{err}}^{(1)} \cdots P_{\text{err}}^{(N)} \approx P_{\text{err}}^N$ to a good approximation when the fidelity is high but error probability is small for each detection.
- [23] $\{\mathcal{F}^{(1)}, \mathcal{F}^{(2)}, \mathcal{F}^{(3)}, \mathcal{F}^{(4)}\} = \{0.9811, 0.9626, 0.9444, 0.9266\}$, and $\{P_{\text{err}}^{(1)}, P_{\text{err}}^{(2)}, P_{\text{err}}^{(3)}, P_{\text{err}}^{(4)}\} = \{0.4286, 0.4394, 0.45, 0.4603\}$.
- [24] Y. Shen, M. Bradford, and J.-T. Shen, *Phys. Rev. Lett.* **107**, 173902 (2011); M. Bradford and J. T. Shen, *Phys. Rev. A* **85**, 043814 (2012); J. T. Shen and S. Fan, *Phys. Rev. A* **79**, 023837 (2009); K. Xia, *Phys. Rev. A* **89**, 023815 (2014); K. Xia, G. Lu, G. Lin, Y. Cheng, Y. Niu, S. Gong, and J. Twamley, *Phys. Rev. A* **90**, 043802 (2014); E. E. Hach, A. W. Elshaari, and S. F. Preble, *Phys. Rev. A* **82**, 063839 (2010).
- [25] G. Hilfer and C. R. Menyuk, *Opt. Lett.* **17**, 949 (1992); D. M. Pepper, J. AuYeung, D. Fekete, and A. Yariv, *Opt. Lett.* **3**, 7 (1978); J. Wang, Y.-Z. Zheng, L.-H. Zhou, Z.-J. Yang, D.-Q. Lu, Q. Guo, and W. Hu, *Acta Phys. Sin.* **61**, 084210 (2012); D. Engin, M. C. Cross, and A. Yariv, *J. Opt. Soc. Am. B* **14**, 3349 (1997); I. Biaggio, *Phys. Rev. Lett.* **82**, 193 (1999); S. Bar-Ad, R. Schilling, and V. Fleurov, *Phys. Rev. A* **87**, 013802 (2013).
- [26] G. R. Dennis, J. J. Hope, and M. T. Johnsson, *Comput. Phys. Commun.* **184**, 201 (2013).
- [27] J. Dove, C. Chudzicki, and J. H. Shapiro, *Phys. Rev. A* **90**, 062314 (2014).
- [28] T. Chaneière, D. N. Matsukevich, S. D. Jenkins, T. A. B. Kennedy, M. S. Chapman, and A. Kuzmich, *Phys. Rev. Lett.* **96**, 093604 (2006).
- [29] R. T. Willis, F. E. Becerra, L. A. Orozco, and S. L. Rolston, *Phys. Rev. A* **79**, 033814 (2009).
- [30] V. Venkataraman, K. Saha, and A. L. Gaeta, *Nat. Photonics* **7**, 138 (2013).
- [31] A. M. Akulshin, A. Cimmino, A. I. Sidorov, R. McLean, and P. Hannaford, *J. Opt. B* **5**, S479 (2003).
- [32] R. Kitamura, L. Pilon, and M. Jonasz, *Appl. Opt.* **46**, 8118 (2007).
- [33] N. Imoto, H. A. Haus, and Y. Yamamoto, *Phys. Rev. A* **32**, 2287 (1985).