

## Physics of Phase Space Matching for Staging Plasma and Traditional Accelerator Components Using Longitudinally Tailored Plasma Profiles

X. L. Xu,<sup>1,2</sup> J. F. Hua,<sup>1</sup> Y. P. Wu,<sup>1</sup> C. J. Zhang,<sup>1</sup> F. Li,<sup>1</sup> Y. Wan,<sup>1</sup> C.-H. Pai,<sup>1</sup> W. Lu,<sup>1,3,\*</sup> W. An,<sup>2</sup> P. Yu,<sup>2</sup>  
M. J. Hogan,<sup>4</sup> C. Joshi,<sup>2</sup> and W. B. Mori<sup>2</sup>

<sup>1</sup>*Department of Engineering Physics, Tsinghua University, Beijing 100084, China*

<sup>2</sup>*University of California, Los Angeles, California 90095, USA*

<sup>3</sup>*IFSA Collaborative Innovation Center, Shanghai Jiao Tong University, Shanghai 200240, China*

<sup>4</sup>*SLAC National Accelerator Laboratory, Menlo Park, California 94025, USA*

(Received 25 August 2015; published 21 March 2016)

Phase space matching between two plasma-based accelerator (PBA) stages and between a PBA and a traditional accelerator component is a critical issue for emittance preservation. The drastic differences of the transverse focusing strengths as the beam propagates between stages and components may lead to a catastrophic emittance growth even when there is a small energy spread. We propose using the linear focusing forces from nonlinear wakes in longitudinally tailored plasma density profiles to control phase space matching between sections with negligible emittance growth. Several profiles are considered and theoretical analysis and particle-in-cell simulations show how these structures may work in four different scenarios. Good agreement between theory and simulation is obtained, and it is found that the adiabatic approximation misses important physics even for long profiles.

DOI: 10.1103/PhysRevLett.116.124801

In the 20th century, particle accelerators have played a very important role in the advancement of modern physics [1]. Today, accelerators such as the Large Hadron Collider [2] and the Linac Coherent Light Source [3] are pushing the frontiers of our knowledge about the origin and complexity of matter. These machines, however, are becoming too large and expensive, giving impetus to research on advanced particle acceleration schemes that may lead to more compact and efficient alternatives to the present technology [4]. One such approach, plasma-based acceleration, has been intensely studied and has made significant recent progress towards both high-gradient and high-efficiency acceleration [4–12]. There is, however, another important challenge in the development of plasma-based accelerators (PBAs) that has only recently been discussed [13–16] and has been hitherto little explored [17,18]; this is to match the beam out of the plasma into another accelerator component without spoiling the beam's emittance. Emittance preservation is imperative to maintaining the beam's brightness and luminosity for coherent light source and collider applications [2,3]. This is part of the rapidly emerging area of basic physics research on manipulating the six-dimensional phase space of high-energy density particle beams.

In this Letter, we show through both analytical solutions as well as OSIRIS [19] particle-in-cell (PIC) simulations that, using plasmas that have longitudinally tailored density profiles as matching sections, it is possible to transport the electron beam to or from the PBA sections without significant emittance growth using ion channel focusing forces which arises in the nonlinear blowout regime [20–

22]. We investigate several density profiles, how to match the Courant-Snyder (CS) parameters  $\beta$  and  $\alpha$  [23] between the two stages that require beam matching, and exact and adiabatic matching.

The use of tailored density profiles and linear wakes to couple the particle beam into or from a PBA stage has been previously suggested, but only in the adiabatic limit [17,18]. Our Letter greatly extends this work while also revealing unexpected physics. We consider five profiles with arbitrary length. We study the evolution of both  $\beta$  and  $\alpha$ , show that perfect matching can be obtained for short sections (nonadiabatic profiles), and show that the adiabatic approximation (for long profiles) misses important physics. Furthermore, we consider nonlinear wakes [21,22] instead of linear wakes, because linear wakes have nonlinear and axial-dependent focusing forces and focusing forces which are altered by beam loading [24] (i.e., dephasing would be an issue).

We consider four examples in which it will be important to achieve beam matching between two stages where at least one stage is a PBA. The first configuration is the so-called injector accelerator, where a  $\sim 100$  MeV class electron beam produced by a short, high-density injector stage is further accelerated to  $\sim$ GeV level using a second low-density accelerator stage [11,25,26]. The second example is the external injection scheme where a high-quality, relativistic electron bunch is first generated using a rf accelerator and then injected into a PBA [27–31]. The third example concerns the proposed PBA-driven light source [32–34], where a high-quality electron beam needs to be coupled from the plasma wake to an undulator. The

last configuration is for the recently developed collider concepts based on linking together many PBAs [35,36]. Each stage (with a separate driver) provides a gain of about 10 GeV. In the latter three cases, a magnetic focusing optic will be needed to couple the beam from one stage into or from the PBA.

In the above scenarios, the beam exiting one stage needs to be coupled into the next stage that may have a drastically different field-focusing strength. In traditional accelerators, solenoids and quadrupoles are typically combined to guide the transverse motion of the particles between the stages. However, due to an ultrahigh focusing gradient in the nonlinear plasma wake ( $G[\text{MT/m}] \equiv F_r/ecd \approx 3.01n_p[10^{17} \text{ cm}^{-3}]$ ), state-of-the-art quadrupoles ( $G \sim 10^3 \text{ T/m}$ ) [37,38] are not strong enough to confine the transverse motion of the particles between the stages. Here  $F_r$  is the transverse focusing force in the direction  $r$  and  $n_p$  is the plasma density. As a result, beams will experience orders of magnitude transverse size variation when propagating between the PBA and the conventional focusing optic, and the particles' transverse motion will become very sensitive to the energy spread of the bunch; i.e., particles with different energy will undergo transverse betatron oscillations with different betatron phases, leading to a catastrophic emittance growth [13–16].

The transverse normalized emittance, which is a figure of merit for the beam quality, is defined as  $\epsilon_n = (1/mc)\sqrt{\langle x^2 \rangle \langle p_x^2 \rangle - \langle xp_x \rangle^2}$ , where  $\langle \rangle$  represents an ensemble average over the beam distribution,  $x$  is the transverse position, and  $p_x$  is the transverse momentum. The phase space distribution is described by the CS parameters  $\beta$ ,  $\alpha$ , and  $\gamma$  [23] where  $\beta = \langle x^2 \rangle / \epsilon$ ,  $\alpha = -\langle xx' \rangle / \epsilon$ ,  $\gamma = \langle x'^2 \rangle / \epsilon$ , where  $x' = dx/dz = p_x/p_z$  is the slope of the particle trajectory,  $\epsilon = \sqrt{\langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2}$  is the geometric emittance,  $\beta$  is a measure of the beam size,  $\alpha$  represents the correlation between  $x$  and  $x'$  (e.g., at beam waist  $\alpha = 0$ ), and  $\gamma$  is a measure of the spread in the particle slopes. The CS parameters satisfy the relationship  $\beta\gamma = 1 + \alpha^2$ . In typical cases, the CS parameters of a matched electron beam in the PBAs are determined by the field structure inside the nonlinear wake as  $\beta_p = \sqrt{2\langle \gamma_b \rangle} k_p^{-1}$ ,  $\alpha_p = 0$ , where  $\langle \gamma_b \rangle$  is the average value of the relativistic factor of the beam.

It is straightforward to obtain the emittance evolution when a relativistic beam drifts in free space as  $\epsilon_n(z) = \langle p_z \rangle \epsilon \sqrt{\hat{\sigma}_{\gamma_b}^2 [(\gamma_i z - \alpha_i)^2 + 1] + 1}$ , where  $\hat{\sigma}_{\gamma_b} = \sqrt{\langle p_z^2 \rangle - \langle p_z \rangle^2} / \langle p_z \rangle$  is the relative energy spread of the beam, and the geometric emittance  $\epsilon$  remains constant in free space [13,14]. Here subscript “ $i$ ” refers to the input or initial quantity. When the relativistic beam propagates in focusing elements, the emittance evolution is determined by the detailed configurations of the quadrupoles or the field structure in the plasma wake. For the simple case

where a linear focusing force  $F_r$  that is constant in  $z$  is present, the emittance grows and finally saturates when the beam is not matched and there is any initial or induced energy spread.

Now we consider the situation shown in Fig. 1(a), where both  $F_r$  and accelerating field  $E_z$  are present. Here an electron bunch of  $\langle \gamma_{b,i} \rangle = 200$  with an initial energy spread  $\hat{\sigma}_{\gamma_b} = 0.01$  is produced in a  $10^{19} \text{ cm}^{-3}$  injector stage ( $\beta_i = 33.7 \mu\text{m}$ ,  $\alpha_i = 0$ ). It then propagates 0.5 mm in vacuum ( $\beta_v \approx 220\beta_i$ ,  $\alpha_v \approx -15$ ) before entering a lower density ( $10^{17} \text{ cm}^{-3}$ ) acceleration stage, with no attempt made to match the beam between the two stages. Further energy spread is induced by the acceleration gradient that varies uniformly between  $[E_z - \Delta E_z/2, E_z + \Delta E_z/2]$ . We solve the transverse motion equation numerically for many test particles to plot the evolution of the emittance as solid lines in Fig. 1(a) for two different values of  $\Delta E_z$ . Catastrophic emittance growth by more than a factor of 15 is seen.

It is also possible to obtain an analytical expression for the projected emittance. Following the derivation in Ref. [16] for cases where all particles are initialized at the same  $z_i$  leads to

$$\epsilon_n = \epsilon_{n,\text{sat}} \sqrt{1 - \frac{(\gamma_i \beta_F + \beta_i / \beta_F)^2 - 4 \left( \frac{\sin \Delta \Phi}{\Delta \Phi} \right)^2}{(\gamma_i \beta_F + \beta_i / \beta_F)^2}}, \quad (1)$$

where  $\epsilon_{n,\text{sat}} \approx \epsilon_{n,i} (\gamma_i \beta_F + \beta_i / \beta_F) / 2$  [15] and  $\beta_F = \sqrt{\langle \gamma_b \rangle} mc / Ge$  is the average beta function of the beam

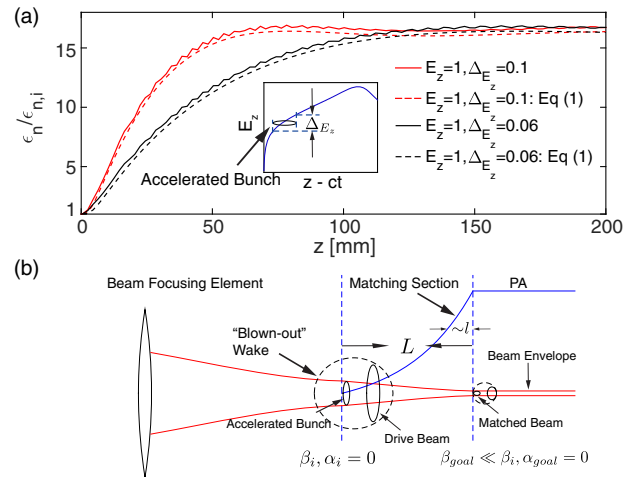


FIG. 1. (a) The emittance evolution of an electron beam ( $\langle \gamma_{b,i} \rangle = 200$ ) from a high-density plasma injector as it propagates in a low-density plasma accelerator. The emittance evolution for two different values of  $\Delta E_z$  and  $E_z = 1$ , where  $E_z$  is normalized by  $mc\omega_{p,\text{acc}}/e$  and  $\omega_{p,\text{acc}}$  is the plasma frequency in the accelerator. The inset shows the relative position of the bunch within the nonlinear accelerating cavity. (b) The concept of matching using a longitudinally tailored plasma profile. The beam to be accelerated in a PBA is focused at the entrance of a plasma density ramp for matching and injected into a fully “blown-out” wake produced by either a laser pulse or an electron bunch (driver bunch).

within the focusing element. Here  $\Phi$  is the electron betatron phase advance and is assumed to be uniformly distributed over  $\Delta\Phi$ . If the particles are not being accelerated,  $\Phi = z/\sqrt{\gamma_b mc/Ge}$ ; if the particles are being accelerated, then  $\Phi = (\sqrt{2\gamma_b} - \sqrt{2\gamma_{b,i}})/E_z$  and  $\beta_F$  in Eq. (1) corresponds to the value when the beam enters the focusing element. The emittance growth from Eq. (1) using the values for  $\gamma$  and  $\beta$  at the end of the vacuum section as the initial values is plotted as dashed lines in Fig. 1(a); excellent agreement with the numerical results can be seen.

As seen from the above example, the emittance of the beam will grow quickly as the beam propagates if it has a finite energy spread and is not matched between the focusing elements. However, by using a plasma that has a specific longitudinal density profile (matching section), one can guide the beam through the two stages with negligible emittance growth. The proposed density-profile matches the initial  $\beta_i$  of the bunch to the  $\beta_{\text{goal}}$  of the PBA or to the external focusing elements by providing a continuously varying focusing force to transport the bunch from its waist ( $\alpha_i = 0$ ) at the exit of the first stage to another waist ( $\alpha_{\text{goal}} = 0$ ) at the end of the matching section [see Fig. 1(b)]. In all four cases mentioned earlier, it is possible to match the beam from one stage into another using this technique, while preserving the beam emittance.

Take density downramp as an example: we start with the equation for the transverse motion of a single electron in the blowout regime (linear focusing force) in the ramp,

$$\frac{d^2x}{dz^2} + K(z)x = 0, \quad (2)$$

where  $K(z) = n_{p0}f(z)e^2/(2\gamma_b mc^2 \epsilon_0) = f(z)\beta_{p0}^2$ ,  $n_{p0}$  is the peak density at the beginning of the matching plasma, and  $f(z)$  is the normalized plasma density profile. We also assume that the beam is in a region where there is negligible acceleration in the matching section. We can normalize all the lengths to  $\beta_{p0}$ ; then, Eq. (2) can be expressed as  $d^2\hat{x}/d\hat{z}^2 + f(\hat{z})\hat{x} = 0$ , where  $\hat{x} = x/\beta_{p0}$ ,  $\hat{z} = z/\beta_{p0}$ . We have found solutions to Eq. (2) for the five different density profiles shown in Fig. 2. As we will show, the profile with the best matching properties is  $f(\hat{z}) = 1/(1 + \hat{z}/\hat{l})^2$ , so we analyze this case in more detail. For this profile (when  $\hat{l} > 1/2$ ) the solution to Eq. (2) is

$$\hat{x} = c_1\sqrt{\xi}\cos\Phi + c_2\sqrt{\xi}\sin\Phi, \quad (3)$$

$$\hat{x}' = \frac{c_1}{\sqrt{\xi}}\left(\frac{\cos\Phi}{2} - s\sin\Phi\right) + \frac{c_2}{\sqrt{\xi}}\left(\frac{\sin\Phi}{2} + s\cos\Phi\right), \quad (4)$$

where  $\xi = \hat{z} + \hat{l}$ ,  $s = \sqrt{\hat{l}^2 - 1/4}$ ,  $\Phi = s \ln \xi$  is the betatron phase advance of the electron, and  $c_1, c_2$  are constants determined by the initial conditions for  $\hat{x}$  and  $\hat{x}'$ . Equations (3) and (4) can then be used to obtain the

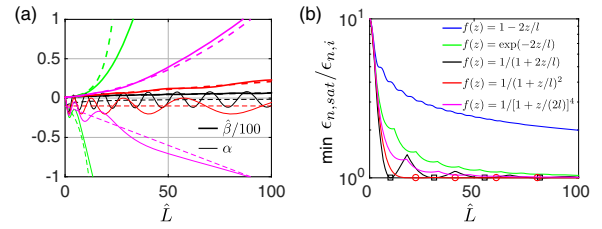


FIG. 2. The performance of the matching plasma with different density profiles. (a) The evolution of the CS parameters when  $\hat{l} = 5$ . Thick and thin lines represent  $\beta$  functions and  $\alpha$  functions. The colors correspond to the profiles listed in (b). Solid lines are from the analytical solutions and the dashed lines are based on adiabatic approximations where  $\hat{\beta} = f(\hat{z})^{-1/2}$ . (b) For each  $\hat{L}$ ,  $\hat{l}$  is scanned to find the optimized value. The parameters are  $\hat{\beta}_i = 1$ ,  $\alpha_i = 0$ ,  $\hat{\beta}_{\text{goal}} = 20$ ,  $\alpha_{\text{goal}} = 0$ , and the case is of a transition from a PBA to a magnetic optics.

mapping  $\begin{pmatrix} \hat{x} \\ \hat{x}' \end{pmatrix} = M(\hat{z}|0) \begin{pmatrix} \hat{x}_i \\ \hat{x}'_i \end{pmatrix}$ , which defines the transport matrix. The elements of the transport matrix can be used to express the CS parameters at  $\hat{z}$  in terms of their initial values [23],

$$\hat{\beta}_i(\hat{z}) = M_{11}^2 \hat{\beta}_i - 2M_{11}M_{12}\alpha_i + M_{12}^2 \hat{\gamma}_i, \quad (5)$$

$$\alpha_i(\hat{z}) = -M_{11}M_{21}\hat{\beta}_i + (M_{11}M_{22} + M_{12}M_{21})\alpha_i - M_{12}M_{22}\hat{\gamma}_i \quad (6)$$

A given matching section has a length  $z_{\text{max}} \equiv \hat{L}$ . For a selected  $\hat{L}$  the output  $\beta$  and  $\alpha$  will depend on  $\hat{l}$ . There will be an optimum  $\hat{l}$  such that the emittance growth is minimized within the target section which has a beta function  $\beta_{\text{goal}}$ . To obtain the optimum  $\hat{l}$  we minimize  $\epsilon_{n,\text{sat}}/\epsilon_{n,i} = [\gamma_i(\hat{z})\beta_{\text{goal}} + \beta_i(\hat{z})/\beta_{\text{goal}}]/2$  for fixed  $\hat{z} = \hat{L}$ , and  $\beta_{\text{goal}}$ . Here the subscript ‘‘goal’’ refers to the final desired quantity. We use Eqs. (5) and (6) to obtain  $\hat{\beta}_i(\hat{z})$  and  $\hat{\alpha}_i(\hat{z})$  for given initial CS parameters.

Solutions to Eq. (2) can be found for the five profiles listed in Fig. 2(b) by, e.g., using *Mathematica* [39]. These solutions can be used to find the appropriate transport matrix for each case. In Fig. 2(a) we plot the evolution of the  $\beta$  and  $\alpha$  functions based on these transport matrices for four of the five profiles with  $\hat{l} = 5$  where the adiabatic approximation should be reasonable. For the exponential and  $[1 + \hat{z}/(2\hat{l})]^{-4}$  profiles, the  $\beta$  function deviates from the adiabatic solution for large  $\hat{z}$ . For other profiles, the  $\beta$  and  $\alpha$  functions given by the adiabatic approximations are close to the average value of the analytical curves, but there is small oscillations about the average. This oscillatory behavior can never be obtained from the lowest-order adiabatic approximation, and it is critical for perfect matching. It is important to note that because  $d\beta/dz = -2\alpha$  the results are less sensitive to  $\hat{L}$  when  $\alpha$  is near zero. In Fig. 2(b) we present optimum  $\epsilon_{n,\text{sat}}/\epsilon_{n,i}$  vs  $\hat{L}$



for a particular  $\beta_{\text{goal}}$ ,  $\beta_i$ , and  $\alpha_i$  for each of the five density profiles. The red [ $f(\hat{z}) = \hat{l}/(1 + \hat{z}/\hat{l})^2$ ] and black [ $f(\hat{z}) = 1/(1 + 2\hat{z}/\hat{l})$ ] curves are of particular interest, because for discrete values of  $\hat{L}$  an optimum  $\hat{l}$  can be found which provides exact matching conditions. These are shown as squares and circles. Furthermore, the red curve has nearly perfect matching for all  $\hat{L} > 10$ .

When matching from a positive phase space ellipse (i.e.,  $\alpha = 0$ ) to another positive phase space ellipse, for the  $f(\hat{z}) = 1/(1 + \hat{z}/\hat{l})^2$  density profile, the parameters for exact matching can be found analytically,

$$l = \beta_{p0} \sqrt{\left[ \frac{(N+1)\pi}{\ln \beta_{\text{goal}}/\beta_i} \right]^2 + \frac{1}{4}}, \quad \frac{L}{l} = \left( \frac{\beta_{\text{goal}}}{\beta_i} - 1 \right), \quad (7)$$

where  $N = 0, 1, 2, \dots$  for the profile with  $f(\hat{z}) = 1/(1 + 2\hat{z}/\hat{l})$ , it is difficult to give an analytical solution of the parameters for exact matching; however, for when  $\hat{l} \ll 1$ , we have found the fitting formulas give near perfect matching:

$$l \approx (1.7 + N)\beta_{p0}(\beta_{\text{goal}}/\beta_i)^{-0.55}$$

$$\frac{L}{l} \approx [0.71 + (0.75 + N)\pi\beta_{p0}/l]^2 - 1. \quad (8)$$

We have considered cases where  $\beta_{\text{goal}} > \beta_i$  so that a density downramp is needed. We note that there is symmetry between the upramp and downramp cases. For the upramp case,  $\beta_{\text{goal}}/\beta_i$  in Eqs. (7) and (8) should be replaced with  $\beta_i/\beta_{\text{goal}}$ .

Next, we verify that plasma matching sections can provide nearly perfect matching using fully self-consistent PIC simulations using the code OSIRIS in 3D (or 2D) Cartesian geometry using a moving window [19]. We consider the three examples schematically shown in Figs. 3(a), 3(c), and 3(e). In each case, we use longitudinally tailored plasma density structures with the ideal density profile  $f(z) = 1/(1 + \hat{z}/\hat{l})^2$  to match the electron beam between stages. We use a laser driver with  $\lambda_0 = 800$  nm and define the  $z$  axis to be the propagating direction of the drive laser and defined  $z = 0$  at the peak of the density. The separation of the peak intensity of the laser and density of the electron beam is  $\sim 6c/\omega_{p0}$  in each case. Parameters specific to each simulation are given in the figure caption.

First, we consider matching an electron beam from a high-density plasma injector into a low-density PBA as shown in Fig. 3(a); this is the case considered in Fig. 1(a) except now the drift space is replaced by a matching plasma section with final  $\beta_{\text{goal}} = 337 \mu\text{m}$ ,  $\alpha_{\text{goal}} = 0$ . The plasma section has  $l \approx 49 \mu\text{m}$ ,  $L \approx 440 \mu\text{m}$ , and  $N = 0$ . The 3D simulation has a dimension of  $180k_0^{-1} \times 240k_0^{-1} \times 240k_0^{-1}$  with  $900 \times 1200 \times 1200$  cells in the  $x$ ,  $y$ , and  $z$  directions, respectively, where  $k_0$  is the wave number of the driver laser. As can be seen in Fig. 3(b), the matching section aids in

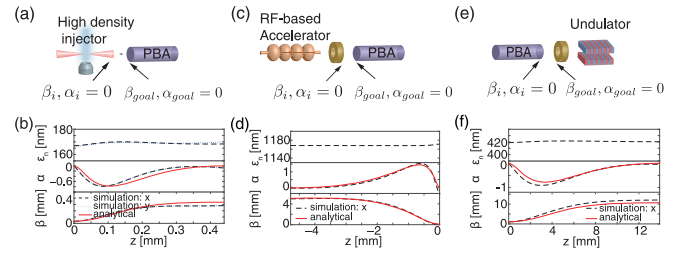


FIG. 3. Schematics of staging (a) a high-density plasma injector ( $10^{19} \text{ cm}^{-3}$ ) and a low-density PBA ( $10^{17} \text{ cm}^{-3}$ ), (c) a rf-based injector and a PBA ( $10^{17} \text{ cm}^{-3}$ ) using a magnetic optic, and (e) a PBA ( $10^{17} \text{ cm}^{-3}$ ) and an undulator using a magnetic optic. Panels (b), (d), and (f) show the evolution of  $\epsilon_n$ ,  $\beta$ , and  $\alpha$  of the electron beam in the matching section for scenarios (a), (c), and (e), respectively. For case (b), the driver laser is focused at  $z = -0.04$  mm, with  $a_0 = 4$ ,  $w_0 = 10 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 15$  fs; at  $z = 0$  mm the electron beam is initialized with  $\sigma_{x,y} = 0.17 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 5$  fs, and  $n_b = 10^{20} \text{ cm}^{-3}$ ; and between  $z = 0$  mm and  $z = 0.44$  mm the beam parameters vary from  $\langle \gamma_b \rangle = 200$  to 192 and  $\hat{\sigma}_{\gamma_b} = 0.1$  to 0.105. For case (d), the driver laser is focused at  $z = 0$  mm, with  $a_0 = 3$ ,  $w_0 = 58 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 100$  fs; at  $z = -4.8$  mm the electron beam is initialized with  $\sigma_x = 10.9 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 25$  fs, and  $n_b = 10^{16} \text{ cm}^{-3}$ ; and between  $z = -4.8$  mm and  $z = 0$  mm the beam parameters vary from  $\langle \gamma_b \rangle = 50$  to 44.8 and  $\hat{\sigma}_{\gamma_b} = 0.02$  to 0.0225. For case (f), the driver laser is focused at  $z = 0$  mm, with  $a_0 = 3$ ,  $w_0 = 58 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 100$  fs; at  $z = 0$  mm the electron beam is initialized with  $\sigma_x = 0.34 \mu\text{m}$ ,  $\tau_{\text{FWHM}} = 25$  fs, and  $n_b = 10^{18} \text{ cm}^{-3}$ ; and between  $z = 0$  mm and  $z = 13.9$  mm the beam parameters vary from  $\langle \gamma_b \rangle = 4000$  to 3966.6 and  $\hat{\sigma}_{\gamma_b} = 0.05$  to 0.0506.

preserving the emittance of the electron bunch at its initial level without appreciable growth, as opposed to the case shown in Fig. 1(a), and excellent agreement between theory and simulation is found.

In the second case, we consider matching an electron bunch (from an external accelerator) that is focused at the beginning of the rising density matching section to the PBA [see Fig. 3(c)]. We use 2D simulations with a moving window of  $1600k_0^{-1} \times 3000k_0^{-1}$  with  $8000 \times 1500$  cells in the  $z$  and  $x$  directions, respectively. The electron beam with  $\langle \gamma_b \rangle = 50$ ,  $\beta_i = 5$  mm,  $\alpha_i = 0$  needs to be exactly matched to  $\beta_{\text{goal}} = 0.12$  mm,  $\alpha_{\text{goal}} = 0$ . We use  $l \approx 0.12$  mm,  $L \approx 4.8$  mm, and  $N = 0$ . Once again the initial beam emittance (1165 nm) is preserved as the beam is transported to the PBA, and excellent agreement between theory and simulation is found.

In the third case [Fig. 3(e)] we consider coupling the electron bunch from the PBA via the matching section into a conventional focusing optic so that it can be injected into an undulator. We use 2D simulations with a moving window of  $1600k_0^{-1} \times 3000k_0^{-1}$  with  $8000 \times 3000$  cells in the  $z$  and  $x$  directions, respectively. We simulate matching an electron beam leaving a plasma with  $\langle \gamma_b \rangle = 4000$ ,  $\beta_i = 1.06$  mm,  $\alpha_i = 0$  out of a matching plasma ( $l \approx 1.5$  mm,  $L \approx 14$  mm, and  $N = 0$ ) into a conventional optic with  $\beta_{\text{goal}} = 10.6$  mm,  $\alpha_{\text{goal}} = 0$ . This case is the reverse of the previous case, where the matching

section aids in transporting a beam with an extremely small  $\beta$  in the PBA section to a much larger  $\beta$  needed to inject the beam into the undulator section. In Fig. 3(f), we see very good agreement between theory and simulation and that the electron beam emittance is preserved. Finally we note that matching of the beam between two PBA sections is essentially combining the cases shown in Figs. 3(c) and 3(e).

In conclusion, we have provided a general formalism for controlling the CS parameters of an electron beam in a PBA through the use of longitudinally tailored plasma sections while operating in the nonlinear blowout regime. The formalism applies for short or long sections where the adiabatic approximation is reasonable.

Work supported by the National Basic Research Program of China Grant No. 2013CBA01501, NSFC Grants No. 11425521, No. 11535006, No. 11175102, No. 11005063, No. 11375006 and No. 11475101, Thousand Young Talents Program, DOE Grants No. DE-SC0010064, No. DE-SC0008491, No. DE-SC0008316, No. DE-SC0014260, and NSF Grants No. ACI-1339893, No. PHY-1500630. Simulations are performed on the UCLA Hoffman 2 and Dawson 2 clusters.

\*weilu@tsinghua.edu.cn

- [1] A. M. Sessler and E. J. Wilson, *Engines of Discovery: A Century of Particle Accelerators* (World Scientific, Hackensack, NJ, 2007).
- [2] G. Aad, T. Abajyan, B. Abbott *et al.*, *Phys. Lett. B* **716**, 1 (2012).
- [3] P. Emma, R. Akre, J. Arthur, R. Bionta, C. Bostedt, J. Bozek, A. Brachmann, P. Bucksbaum, R. Coffee, F.-J. Decker *et al.*, *Nat. Photonics* **4**, 641 (2010).
- [4] M. Litos, E. Adli, W. An, C. Clarke, C. Clayton, S. Corde, J. Delahaye, R. England, A. Fisher, J. Frederico *et al.*, *Nature (London)* **515**, 92 (2014).
- [5] W. P. Leemans, B. Nagler, A. J. Gonsalves, Cs. Tóth, K. Nakamura, C. G. R. Geddes, E. Esarey, C. B. Schroeder, and S. M. Hooker, *Nat. Phys.* **2**, 696 (2006).
- [6] I. Blumenfeld *et al.*, *Nature (London)* **445**, 741 (2007).
- [7] S. Kneip, S. R. Nagel, S. F. Martins, S. P. D. Mangles, C. Bellei, O. Chekhlov, R. J. Clarke, N. Delerue, E. J. Divall, G. Doucas *et al.*, *Phys. Rev. Lett.* **103**, 035002 (2009).
- [8] D. H. Froula, C. E. Clayton, T. Döppner, K. A. Marsh, C. P. J. Barty, L. Divol, R. A. Fonseca, S. H. Glenzer, C. Joshi, W. Lu *et al.*, *Phys. Rev. Lett.* **103**, 215006 (2009).
- [9] C. E. Clayton, J. E. Ralph, F. Albert, R. A. Fonseca, S. H. Glenzer, C. Joshi, W. Lu, K. A. Marsh, S. F. Martins, W. B. Mori *et al.*, *Phys. Rev. Lett.* **105**, 105003 (2010).
- [10] X. Wang *et al.*, *Nat. Commun.* **4**, 1988 (2013).
- [11] H. T. Kim, K. H. Pae, H. J. Cha, I. J. Kim, T. J. Yu, J. H. Sung, S. K. Lee, T. M. Jeong, and J. Lee, *Phys. Rev. Lett.* **111**, 165002 (2013).
- [12] W. P. Leemans, A. J. Gonsalves, H.-S. Mao, K. Nakamura, C. Benedetti, C. B. Schroeder, C. Tóth, J. Daniels, D. E. Mittelberger, S. S. Bulanov *et al.*, *Phys. Rev. Lett.* **113**, 245002 (2014).
- [13] P. Antici, A. Bacci, C. Benedetti, E. Chiadroni, M. Ferrario, A. R. Rossi, L. Lancia, M. Migliorati, A. Mostacci, L. Palumbo *et al.*, *J. Appl. Phys.* **112**, 044902 (2012).
- [14] M. Migliorati, A. Bacci, C. Benedetti, E. Chiadroni, M. Ferrario, A. Mostacci, L. Palumbo, A. R. Rossi, L. Serafini, and P. Antici, *Phys. Rev. ST Accel. Beams* **16**, 011302 (2013).
- [15] T. Mehrling, J. Grebenyuk, F. S. Tsung, K. Floettmann, and J. Osterhoff, *Phys. Rev. ST Accel. Beams* **15**, 111303 (2012).
- [16] X. L. Xu *et al.*, *Phys. Rev. Lett.* **112**, 035003 (2014).
- [17] K. Floettmann, *Phys. Rev. ST Accel. Beams* **17**, 054402 (2014).
- [18] I. Dornmair, K. Floettmann, and A. R. Maier, *Phys. Rev. ST Accel. Beams* **18**, 041302 (2015).
- [19] R. Fonseca *et al.*, *Lect. Notes Comput. Sci.* **2331**, 342 (2002).
- [20] J. B. Rosenzweig, B. Breizman, T. Katsouleas, and J. J. Su, *Phys. Rev. A* **44**, R6189 (1991).
- [21] W. Lu, C. Huang, M. Zhou, W. B. Mori, and T. Katsouleas, *Phys. Rev. Lett.* **96**, 165002 (2006).
- [22] W. Lu, C. Huang, M. Zhou, M. Tzoufras, F. S. Tsung, W. B. Mori, and T. Katsouleas, *Phys. Plasmas* **13**, 056709 (2006).
- [23] S.-Y. Lee, *Accelerator Physics* (World Scientific, Singapore, 1999).
- [24] M. Tzoufras, W. Lu, F. S. Tsung, C. Huang, W. B. Mori, T. Katsouleas, J. Vieira, R. A. Fonseca, and L. O. Silva, *Phys. Rev. Lett.* **101**, 145002 (2008).
- [25] A. Gonsalves, K. Nakamura, C. Lin, D. Panasencko, S. Shiraishi, T. Sokollik, C. Benedetti, C. Schroeder, C. Geddes, J. Van Tilborg *et al.*, *Nat. Phys.* **7**, 862 (2011).
- [26] J. S. Liu, C. Q. Xia, W. T. Wang, H. Y. Lu, C. Wang, A. H. Deng, W. T. Li, H. Zhang, X. Y. Liang, Y. X. Leng *et al.*, *Phys. Rev. Lett.* **107**, 035001 (2011).
- [27] C. E. Clayton, K. A. Marsh, A. Dyson, M. Everett, A. Lal, W. P. Leemans, R. Williams, and C. Joshi, *Phys. Rev. Lett.* **70**, 37 (1993).
- [28] C. Clayton, M. Everett, A. Lal, D. Gordon, K. Marsh, and C. Joshi, *Phys. Plasmas* **1**, 1753 (1994).
- [29] M. Everett, A. Lal, D. Gordon, C. Clayton, K. Marsh, and C. Joshi, *Nature (London)* **368**, 527 (1994).
- [30] X. F. D. Stragier, O. J. Luiten, S. B. van der Geer, M. J. van der Wiel, and G. J. H. Brussaard, *J. Appl. Phys.* **110**, 024910 (2011).
- [31] A. R. Rossi, A. Bacci, M. Belleveglia, E. Chiadroni, A. Cianchi, G. D. Pirro, M. Ferrario, A. Gallo, G. Gatti, C. Maroli *et al.*, *Nucl. Instrum. Methods Phys. Res., Sect. A* **740**, 60 (2014).
- [32] H.-P. Schlenvoigt *et al.*, *Nat. Phys.* **4**, 130 (2008).
- [33] M. Fuchs *et al.*, *Nat. Phys.* **5**, 826 (2009).
- [34] S. Cipiccia *et al.*, *Nat. Phys.* **7**, 867 (2011).
- [35] W. Leemans and E. Esarey, *Phys. Today* **62**, No. 3, 44 (2009).
- [36] E. Adli, J.-P. Delahaye, S. J. Gessner, M. J. Hogan, T. Raubenheimer, W. An, C. Joshi, and W. Mori, arXiv: 1308.1145.
- [37] T. Eichner, F. Grüner, S. Becker, M. Fuchs, D. Habs, R. Weingartner, U. Schramm, H. Backe, P. Kunz, and W. Lauth, *Phys. Rev. ST Accel. Beams* **10**, 082401 (2007).
- [38] J. Harrison, A. Joshi, J. Lake, R. Candler, and P. Musumeci, *Phys. Rev. ST Accel. Beams* **15**, 070703 (2012).
- [39] Mathematica, version 9, 2012, <http://www.wolfram.com/mathematica/>.